


Series 10-TU Polyurethane Tubing

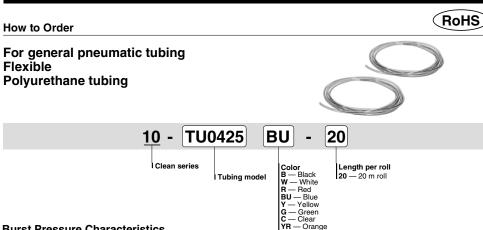

Burst Pressure Characteristics Curve and Operating pressure



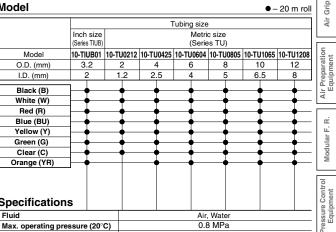


Be sure to read this before handling. Refer to page 1382 for Safety In-I structions and pages 1237 to 1240 for Fittings and Tubing Precautions.

Caution

- 1. Applicable for general industrial water. Please consult with SMC if using for the other kind of fluid. Also, the surge voltage pressure must be under the maximum operating pressure. If the surge pressure exceeds the maximum operating pressure, it will result in damage to fittings and tubes.

 2. The value of the max. operating pressure is at a temperature of 20°C. Refer to the burst pressure characteristics curve for other temperatures. Furthermore, abnormal temperature rises caused by adiabatic compression
- ture rises caused by adiabatic compression may result in the burst of the tube. 3. The value of the minimum bending radius is measured at the temperature of 20°C as shown in the figure on the right.

Specifications 0.8 MPa Max. operating pressure (20°C) Refer to the burst pressure characteristics curve. **Burst pressure** Clean series fittings 10-KQ2, 10-KF, 10-KDM, 10-KG Recommended fittings 10-M, 10-MS, KP, KPQ, KPG 20 Min. bending radius (mm) 10 4 15 27 35 Operating temperature -20 to 60°C, Water: 0 to 40°C (No freezing) Material Polyurethane Cleanliness class (ISO class) Class 3



Air Cylinders

