

Cylindrical Inductive Full-Metal General / Spatter-Resistant Proximity Sensors PRF / PRFA Series (DC 2-wire)

INSTRUCTION MANUAL

DRW161038AG

Autonics

Thank you for choosing our Autonics product.

Read and understand the instruction manual and manual thoroughly before using the product.

For your safety, read and follow the below safety considerations before using.

For your safety, read and follow the considerations written in the instruction manual, other manuals and Autonics website.

Keep this instruction manual in a place where you can find easily.

The specifications, dimensions, etc. are subject to change without notice for product improvement. Some models may be discontinued without notice.

Follow Autonics website for the latest information.

Safety Considerations

- Observe all 'Safety Considerations' for safe and proper operation to avoid hazards.
- ⚠ symbol indicates caution due to special circumstances in which hazards may occur.

⚠ Warning Failure to follow instructions may result in serious injury or death.

01. Fail-safe device must be installed when using the unit with machinery that may cause serious injury or substantial economic loss. (e.g. nuclear power control, medical equipment, ships, vehicles, railways, aircraft, combustion apparatus, safety equipment, crime/disaster prevention devices, etc.)
Failure to follow this instruction may result in personal injury, economic loss or fire.

02. Do not use the unit in the place where flammable/explosive/corrosive gas, high humidity, direct sunlight, radiant heat, vibration, impact, or salinity may be present.
Failure to follow this instruction may result in explosion or fire.

03. Do not disassemble or modify the unit.
Failure to follow this instruction may result in fire.

04. Do not connect, repair, or inspect the unit while connected to a power source.
Failure to follow this instruction may result in fire.

05. Check 'Connections' before wiring.
Failure to follow this instruction may result in fire.

⚠ Caution Failure to follow instructions may result in injury or product damage.

01. Use the unit within the rated specifications.

Failure to follow this instruction may result in fire or product damage.

02. Use a dry cloth to clean the unit, and do not use water or organic solvent.

Failure to follow this instruction may result in fire.

03. Do not supply power without load.

Failure to follow this instruction may result in fire or product damage.

Cautions during Use

- Follow instructions in 'Cautions during Use'. Otherwise, it may cause unexpected accidents.
- 12-24 VDC power supply should be insulated and limited voltage/current or Class 2, SELV power supply device.
- Use the product, after 0.8 sec of supplying power.
- Wire as short as possible and keep away from high voltage lines or power lines, to prevent surge and inductive noise.
- Do not use near the equipment which generates strong magnetic force or high frequency noise (transceiver, etc.).
- In case installing the product near the equipment which generates strong surge (motor, welding machine, etc.), use diode or varistor to remove surge.
- If the surface of the product is rubbed with a hard object, PTFE coating can be worn out.
- This unit may be used in the following environments.
 - Indoors (UL Type 1 Enclosure)
 - Altitude max. 2,000 m
 - Pollution degree 3
 - Installation category II

Cautions for Installation

- Install the unit correctly with the usage environment, location, and the designated specifications.
- Do NOT impacts with a hard object or excessive bending of the wire lead-out. It may cause damage the water resistance.
- Do NOT pull the \varnothing 3.5 mm cable with a tensile strength of 25 N, the \varnothing 4 mm cable with a tensile strength of 30 N or over and the \varnothing 5 mm cable with a tensile strength of 50 N or over. It may result in fire due to the broken wire.
- When extending wire, use AWG 22 cable or over within 200 m.

Ordering Information

This is only for reference.

For selecting the specific model, follow the Autonics web site.

PRF ① ② T ③ - ④ D O - ⑤

① Characteristic

No-mark: General type

A: Spatter-resistant type

② Connection

No-mark: Cable type

W: Cable connector type

③ DIA. of sensing side

Number: DIA. of sensing side (unit: mm)

④ Sensing distance

Number: Sensing distance (unit: mm)

⑤ Cable


V: Oil resistant cable type

IV: Oil resistant cable type (IEC standards)

Connections


- LOAD can be wired to any direction.
- Connect LOAD before supplying the power.

■ Cable type

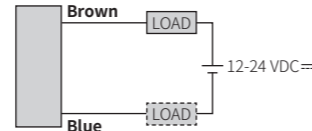


■ Cable connector type

- For LOAD connection, follow the cable type connection.
- Fasten the connector not to shown the thread. (0.39 to 0.49 N m)
- Fasten the vibration part with PTFE tape.



Pin	Normally open	
	Color	Func.
①	Brown	+V
②	-	-
③	-	-
④	Blue	0 V

■ Inner circuit

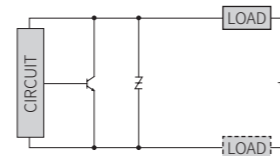

Operation Timing Chart

	Normally open
Sensing target	Presence
	Nothing
Load	Operation
	Return
Operation indicator (red)	ON
	OFF

Sold Separately

- Connector cable, Connector connection cable, Transmission coupler
- Spatter protection cover, Fixing bracket

Specifications

Installation	Flush type			
General	PRF□T08-1.5DO-□	PRF□T12-2DO-□	PRF□T18-5DO-□	PRF□T30-10DO-□
Spatter-resistant	PRFA□T08-1.5DO-□	PRFA□T12-2DO-□	PRFA□T18-5DO-□	PRFA□T30-10DO-□
DIA. of sensing side	\varnothing 8 mm	\varnothing 12 mm	\varnothing 18 mm	\varnothing 30 mm
Sensing distance ⁰¹⁾	1.5 mm	2 mm	5 mm	10 mm
Setting distance	0 to 1.05 mm	0 to 1.4 mm	0 to 3.5 mm	0 to 7 mm
Hysteresis	\leq 15 % of sensing distance			
Standard sensing target: iron	8 × 8 × 1 mm	12 × 12 × 1 mm	30 × 30 × 1 mm	54 × 54 × 1 mm
Response frequency ⁰²⁾	200 Hz	100 Hz	80 Hz	50 Hz
Affection by temperature	$\leq \pm$ 20 % for sensing distance at ambient temperature 20 °C			
Indicator	Operating indicator (red)			
Approval	CE ENEC	CE ENEC	CE ENEC	CE ENEC
Unit weight (package)	\approx 55 g (\approx 80 g)	\approx 83 g (\approx 110 g)	\approx 97 g (\approx 132 g)	\approx 170 g (\approx 225 g)

01) Use accessories (nut, washer) made of SUS. Or, sensing distance cannot be guaranteed.

02) The response frequency is the average value. The standard sensing target is used and the width is set as 2 times of the standard sensing target, 1/2 of the sensing distance for the distance.

Power supply	12-24 VDC (ripple P-P: \leq 10 %), operating voltage: 10-30 VDC
Leakage current	\leq 0.8 mA
Control output	3 to 100 mA
Residual voltage	\leq 3.5 V
Protection circuit	Surge protection circuit, output short over current protection circuit, reverse polarity protection
Insulation resistance	\geq 50 M Ω (500 VDC = megger)
Dielectric strength	1,000 VAC ~ 50/60Hz for 1 minute (between all terminals and case)
Vibration	1.5 mm amplitude at frequency 10 to 55 Hz in each X, Y, Z direction for 2 hours
Shock	1,000 m/s ² (\approx 100 G) in each X, Y, Z direction for 10 times (DIA. of sensing side \varnothing 8 mm) : 500 m/s ² (\approx 50 G) in each X, Y, Z direction for 10 times
Ambient temp. ⁰¹⁾	-25 to 70 °C, storage: -25 to 70 °C (non-freezing or non-condensation)
Ambient humi.	35 to 95 %RH, storage: 35 to 95 %RH (non-freezing or non-condensation)
Protection	IP67 (IEC standards)
Connection	Cable type / Cable connector type model
Cable spec. ⁰²⁾	DIA. of sensing side \varnothing 8 mm: \varnothing 4 mm, 2-wire DIA. of sensing side \varnothing 12 mm, \varnothing 18 mm, \varnothing 30 mm: \varnothing 5 mm, 2-wire
Wire spec.	AWG 22 (0.08 mm, 60-wire), insulator diameter: \varnothing 1.25 mm
Connector	M12 connector
Material	Oil resistant cable (dark gray): oil resistant polyvinyl chloride (PVC)
General	Case/Nut: SUS303, washer: SUS304, sensing side ⁰³⁾ : SUS303
Spatter-resistant	Case/Nut: SUS303 (PTFE coated), washer: SUS304, sensing side ⁰³⁾ : SUS303 (PTFE coated)

01) UL approved surrounding air temperature 40 °C

02) Cable type: 2 m (option: 5 m), cable connector type: 300 mm

03) Thickness: 0.8 mm (DIA. of sensing side \varnothing 8 mm: 0.4 mm)


Effect of Aluminum Scraps

When aluminum scraps are attached or stacked at sensing side, the proximity sensor does not detect and sensing signal is OFF.

However, the below cases may occur to sensing signal. In this case, remove the scraps.

- When the size of aluminum scraps (d) is bigger than 2/3 of the sensing side size (D)
- When aluminum scraps are attached on the sensing side by external pressure


Sensing side	Size	
	d	D (mm)
\varnothing 8 mm	\geq 5.33 mm	6
\varnothing 12 mm	\geq 8 mm	10
\varnothing 18 mm	\geq 12 mm	16
\varnothing 30 mm	\geq 20 mm	28



Cut-out Dimensions

- Unit: mm, For the detailed drawings, follow the Autonics web site.

	\varnothing 8 mm	\varnothing 12 mm	\varnothing 18 mm	\varnothing 30 mm
Mounting hole (H)	\varnothing 8.5 ^{+0.5} / ₀	\varnothing 12.5 ^{+0.5} / ₀	\varnothing 18.5 ^{+0.5} / ₀	\varnothing 30.5 ^{+0.5} / ₀
TAP	M8×1	M12×1	M18×1	M30×1.5




	\varnothing 8 mm	\varnothing 12 mm	\varnothing 18 mm	\varnothing 30 mm
\varnothing A	15	21	29	42
B	13	17	24	36

Setting Distance Formula

Detecting distance can be changed by the shape, size or material of the target. For stable sensing, install the unit within the 70% of sensing distance.

Setting distance (Sa)

= Sensing distance (Sn) × 70%

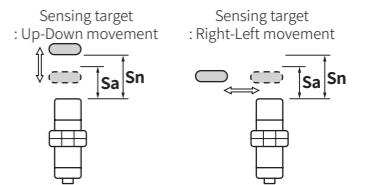


Mutual-interference & Influence by Surrounding Metals

■ Mutual-interference


When plural proximity sensors are mounted in a close row, malfunction of sensor may be caused due to mutual interference.

Therefore, be sure to provide a minimum distance between the two sensors, as below table.

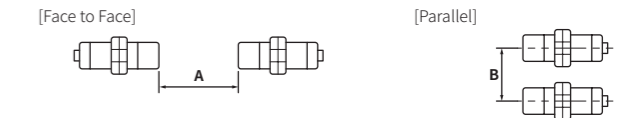

■ Influence by surrounding metals

When sensors are mounted on metallic panel, it must be prevented sensors from being affected by any metallic object except target. Therefore, be sure to provide a minimum distance as below chart.

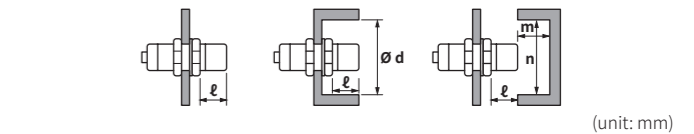

Sensing side	\varnothing 8 mm	\varnothing 12 mm	\varnothing 18 mm	\varnothing 30 mm
A	35	40	65	110
B	30	35	60	100
ℓ	0	0	0	0
\varnothing d	8	12	18	30
m	4.5	8	20	40
n	30	40	60	100

Tightening Torque

Use the provided washer to tighten the nuts.

The allowable tightening torque table is for inserting the washer as below.

Sensing side	\varnothing 8 mm	\varnothing 12 mm	\varnothing 18 mm	\varnothing 30 mm
Strength	3.5 N m	25 N m	70 N m	180 N m
Tightening torque	3.5 N m	25 N m	70 N m	180 N m