



Impact Universal Joint Socket


4B55M

1/2"

- Special design for confined spaces
- DIN 3121



• Standard Length

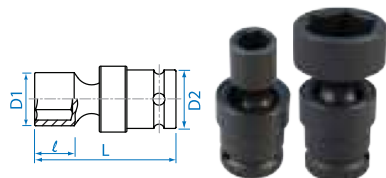

KT NO.	mm	D1 mm	D2 mm	mm	L mm		
4B5510M	10	17.0	27.5	12	64	161	10 / 120
4B5511M	11	19.0	27.5	12	64	166	10 / 120
4B5512M	12	19.0	27.5	12	64	162	10 / 120
4B5513M	13	21.8	27.5	12	64	176	10 / 120
4B5514M	14	22.0	27.5	12	64	174	10 / 120
4B5515M	15	22.0	27.5	12	64	172	10 / 120
4B5516M	16	23.9	27.5	12	64	180	10 / 120
4B5517M	17	25.0	27.5	12	64	173	10 / 120
4B5518M	18	25.8	27.5	12	64	173	10 / 120
4B5519M	19	27.9	27.5	12	64	187	10 / 120
4B5521M	21	30.0	27.5	12	64	190	10 / 120
4B5522M	22	31.7	27.5	12	64	196	10 / 120
4B5524M	24	35.8	27.5	12	64	217	6 / 96

Impact Bit Socket



1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

4055M

- Hexagon head
- DIN 3121


4055S 1/2"

- Hexagon head
- ANSI / ASME B107.2



KT NO.	mm	L mm	Max. torq Nm		
405504M	H4	60	20.8	72	10 / 180
405505M	H5	60	36.0	73	10 / 180
405506M	H6	60	62.4	74	10 / 180
405507M	H7	60	97.0	76	10 / 180
405508M	H8	60	144.0	78	10 / 180
405510M	H10	60	264.0	86	10 / 180
405512M	H12	60	480.0	99	10 / 180
405513M	H13	60	518.0	105	10 / 180
405514M	H14	60	650.0	110	10 / 180
405516M	H16	60	680.0	127	10 / 180
405517M	H17	60	715.0	180	10 / 80
405518M	H18	60	740.0	179	10 / 80
405519M	H19	60	786.0	199	10 / 80

KT NO.	Inch	L mm	Max. torq Nm		
405506S	3/16	60	36.0	66	10 / 180
405508S	1/4	60	93.6	74	10 / 180
405510S	5/16	60	144.0	77	10 / 180
405512S	3/8	60	264.0	80	10 / 180
405514S	7/16	60	420.0	84	10 / 180
405516S	1/2	60	518.0	88	10 / 180

Impact Bit Socket

4056M

1/2"

- Spline head
- DIN 3121



KT NO.	Size	L mm	Max. torq Nm		
405608M	M 8	60	62.4	73	10 / 180
405610M	M10	60	144.0	81	10 / 180
405612M	M12	60	229.0	88	10 / 180

4053

- For torx internal screw
- DIN 3121

4063 1/2"


4053



4063

KT NO.	Size	L mm		
405320	T20	60	58.0	10 / 180
405325	T25	60	73.0	10 / 180
405327	T27	60	73.5	10 / 180
405330	T30	60	74.0	10 / 180
405340	T40	60	85.0	10 / 180
405345	T45	60	90.0	10 / 180
405350	T50	60	95.0	10 / 180
405355	T55	60	100.0	10 / 180
405360	T60	60	105.0	10 / 180
405370	T70	60	105.0	10 / 180
406325	T25	100	97.0	6 / 120
406327	T27	100	97.5	6 / 120
406330	T30	100	98.0	6 / 120
406340	T40	100	110.0	6 / 120
406345	T45	100	130.0	6 / 120
406350	T50	100	150.0	6 / 120
406355	T55	100	160.0	6 / 120
406360	T60	100	170.0	6 / 120

4015M

- Hexagon head
- DIN 3121

4015S 1/2"


KT NO.	mm	L mm	Max. torq Nm		
401505M	H5	80	36.0	84	6 / 120
401506M	H6	80	62.4	86	6 / 120
401507M	H7	80	97.0	89	6 / 120
401508M	H8	80	144.0	96	6 / 120
401509M	H9	80	229.0	114	6 / 120
401510M	H10	80	264.0	136	6 / 120
401512M	H12	80	480.0	145	6 / 120
401513M	H13	80	518.0	155	6 / 120
401514M	H14	80	650.0	164	6 / 120
401517M	H17	80	715.0	248	6 / 96
401519M	H19	80	786.0	246	6 / 96

KT NO.	Inch	L mm	Max. torq Nm		
401508S	1/4	80	93.6	87	6 / 120
401510S	5/16	80	144.0	90	6 / 120
401512S	3/8	80	264.0	125	6 / 120
401516S	1/2	80	518.0	150	6 / 120