



Impact Universal Joint Socket


4B55M

1/2"

- Special design for confined spaces
- DIN 3121



• Standard Length

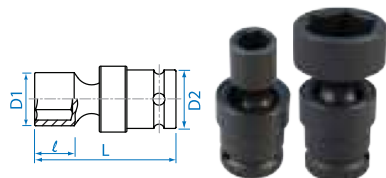

KT NO.	mm	D1 mm	D2 mm	mm	L mm		
4B5510M	10	17.0	27.5	12	64	161	10 / 120
4B5511M	11	19.0	27.5	12	64	166	10 / 120
4B5512M	12	19.0	27.5	12	64	162	10 / 120
4B5513M	13	21.8	27.5	12	64	176	10 / 120
4B5514M	14	22.0	27.5	12	64	174	10 / 120
4B5515M	15	22.0	27.5	12	64	172	10 / 120
4B5516M	16	23.9	27.5	12	64	180	10 / 120
4B5517M	17	25.0	27.5	12	64	173	10 / 120
4B5518M	18	25.8	27.5	12	64	173	10 / 120
4B5519M	19	27.9	27.5	12	64	187	10 / 120
4B5521M	21	30.0	27.5	12	64	190	10 / 120
4B5522M	22	31.7	27.5	12	64	196	10 / 120
4B5524M	24	35.8	27.5	12	64	217	6 / 96

Impact Bit Socket



- Air pressure must not exceed 90PSI (6.3bar)
- Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

4055M

- Hexagon head
- DIN 3121


4055S 1/2"

- Hexagon head
- ANSI / ASME B107.2



KT NO.	mm	L mm	Max. torq Nm		
405504M	H4	60	20.8	72	10 / 180
405505M	H5	60	36.0	73	10 / 180
405506M	H6	60	62.4	74	10 / 180
405507M	H7	60	97.0	76	10 / 180
405508M	H8	60	144.0	78	10 / 180
405510M	H10	60	264.0	86	10 / 180
405512M	H12	60	480.0	99	10 / 180
405513M	H13	60	518.0	105	10 / 180
405514M	H14	60	650.0	110	10 / 180
405516M	H16	60	680.0	127	10 / 180
405517M	H17	60	715.0	180	10 / 80
405518M	H18	60	740.0	179	10 / 80
405519M	H19	60	786.0	199	10 / 80

KT NO.	Inch	L mm	Max. torq Nm		
405506S	3/16	60	36.0	66	10 / 180
405508S	1/4	60	93.6	74	10 / 180
405510S	5/16	60	144.0	77	10 / 180
405512S	3/8	60	264.0	80	10 / 180
405514S	7/16	60	420.0	84	10 / 180
405516S	1/2	60	518.0	88	10 / 180

Impact Bit Socket

4056M

1/2"

- Spline head
- DIN 3121



KT NO.	Size	L mm	Max. torq Nm		
405608M	M 8	60	62.4	73	10 / 180
405610M	M10	60	144.0	81	10 / 180
405612M	M12	60	229.0	88	10 / 180

4053

- For torx internal screw
- DIN 3121

4063 1/2"


4053



4063

KT NO.	Size	L mm		
405320	T20	60	58.0	10 / 180
405325	T25	60	73.0	10 / 180
405327	T27	60	73.5	10 / 180
405330	T30	60	74.0	10 / 180
405340	T40	60	85.0	10 / 180
405345	T45	60	90.0	10 / 180
405350	T50	60	95.0	10 / 180
405355	T55	60	100.0	10 / 180
405360	T60	60	105.0	10 / 180
405370	T70	60	105.0	10 / 180
406325	T25	100	97.0	6 / 120
406327	T27	100	97.5	6 / 120
406330	T30	100	98.0	6 / 120
406340	T40	100	110.0	6 / 120
406345	T45	100	130.0	6 / 120
406350	T50	100	150.0	6 / 120
406355	T55	100	160.0	6 / 120
406360	T60	100	170.0	6 / 120

4015M

- Hexagon head
- DIN 3121

4015S 1/2"


KT NO.	mm	L mm	Max. torq Nm		
401505M	H5	80	36.0	84	6 / 120
401506M	H6	80	62.4	86	6 / 120
401507M	H7	80	97.0	89	6 / 120
401508M	H8	80	144.0	96	6 / 120
401509M	H9	80	229.0	114	6 / 120
401510M	H10	80	264.0	136	6 / 120
401512M	H12	80	480.0	145	6 / 120
401513M	H13	80	518.0	155	6 / 120
401514M	H14	80	650.0	164	6 / 120
401517M	H17	80	715.0	248	6 / 96
401519M	H19	80	786.0	246	6 / 96

KT NO.	Inch	L mm	Max. torq Nm		
401508S	1/4	80	93.6	87	6 / 120
401510S	5/16	80	144.0	90	6 / 120
401512S	3/8	80	264.0	125	6 / 120
401516S	1/2	80	518.0	150	6 / 120