

Technical Data

- Indicator
- Indicating range: ± 0.06 mm/ ± 0.0023 in
- Repeatability of indication: $0.4 \mu\text{m}/0.00002$ in
- Dial indication accuracy: $1 \mu\text{m}/0.00005$ in
- Flatness: $0.3 \mu\text{m}/0.000012$ in
- Parallelism: $0.6 \mu\text{m}/0.000024$ in for models up to 50 mm/2 in measuring range
 $1 \mu\text{m}/0.00004$ in for models over 50 mm/2 in measuring range



**Dial Snap Meters
SERIES 523**

- Suited for the measurement of mass-produced parts.
- Designed for measurement using a stand: produces stable measurement.
- Greatly improved accuracy: indication error and graduation of $1 \mu\text{m}$.
- IP protection level: 54, coolant-splash resistant during grinding process.
- Hard-coated crystal: enhanced oil and scratch resistance.
- Indicator scale is large and easy to read.
- All models come with the zero position adjustment feature.
- Equipped with an elevating workpiece stop as standard.
- Measuring faces: Carbide.




523-121

SPECIFICATIONS

Metric				
Order No.	Range (mm)	Dial graduation (mm)	Measuring force (N)	Mass (g)
523-121	0 - 25	0.001	5 - 10	740
523-122	25 - 50			840
523-123	50 - 75			950
523-124	75 - 100			1080
Inch				
Order No.	Range (in)	Dial graduation (in)	Measuring force (N)	Mass (g)
523-131	0 - 1	0.00005	5 - 10	740
523-132	1 - 2			840
523-133	2 - 3			950
523-134	3 - 4			1080

DIMENSIONS

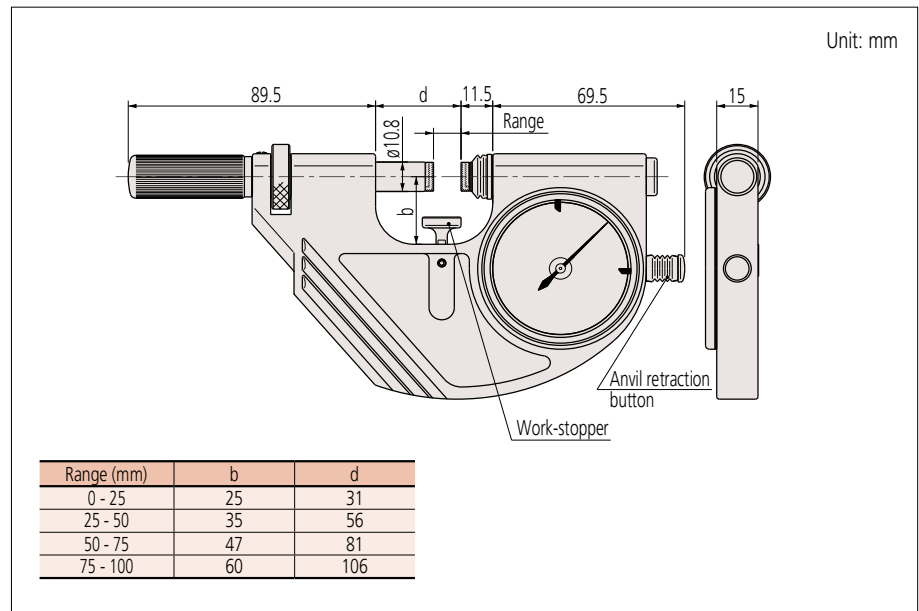

Unit: mm