

Impact Bit Socket

KT No. & D1

6015M

3/4"

- Hexagon head
- DIN 3121




KT NO.	 mm	L mm	Max. torq Nm		
601514M	H14	87	684	325	2 / 48
601517M	H17	87	1136	343	2 / 48
601519M	H19	87	1577	365	2 / 48
601521M	H21	87	2134	490	1 / 24
601522M	H22	87	2436	522	1 / 24
601524M	H24	87	3190	555	1 / 24
601527M	H27	87	4535	604	1 / 24

609616MxxH

609622MxxH 3/4"

- DIN 3121



609616MxxH



609622MxxH

KT NO.	 S mm	 mm	L (mm)	Max. torq Nm		
609616M10H	H10	16	77	264	416	4 / 40
609616M12H	H12	16	77	480	422	4 / 40
609616M14H	H14	16	77	684	430	4 / 40
609616M17H	H17	16	77	880	443	4 / 40
609616M19H	H19	16	77	880	450	4 / 40
609616M22H	H22	16	77	880	473	4 / 40
609622M19H	H19	22	93	1577	670	1 / 24
609622M22H	H22	22	93	2436	692	1 / 24
609622M24H	H24	22	93	2436	706	1 / 24
609622M27H	H27	22	93	2436	730	1 / 24
609622M30H	H30	22	93	2436	744	1 / 24
609622M32H	H32	22	93	2436	783	1 / 24


1740

3/4"

- Hex bit & bit holder
- DIN 3121



1740

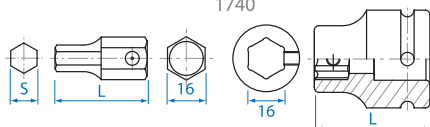


KT NO.	S mm	L mm	Max. torq Nm		
174010H	H10	40	264	46	20 / 400
174012H	H12	40	480	52	20 / 400
174014H	H14	40	684	60	20 / 200
174017H	H17	40	880	73	20 / 200
174019H	H19	40	880	80	20 / 200
174022H	H22	40	880	97	12 / 120
609616M	16	52	-	370	6 / 48

1954

3/4"


609622M 3/4"

- Hex bit & bit holder
- DIN 3121

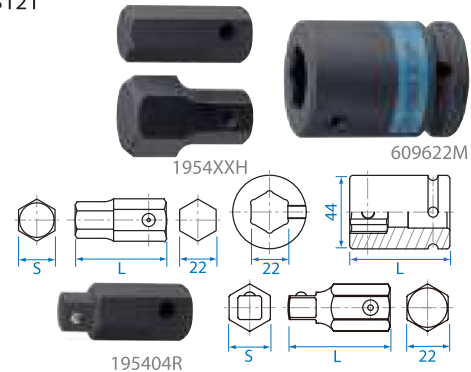

1954XXH

609622M

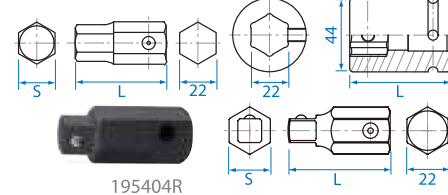

195404R

KT NO.	S mm	L mm	Max. torq Nm		
195419H	H19	54.5	1577	140	12 / 120
195422H	H22	54.5	2436	162	12 / 120
195424H	H24	54.5	2436	176	10 / 100
195427H	H27	54.5	2436	200	10 / 100
195430H	H30	54.5	2436	232	6 / 60
195432H	H32	54.5	2436	243	6 / 60
609622M	22	60.0	-	530	6 / 48
195404R	1/2"M	54.5	-	135	12 / 120


Impact Accessory

6797

6797P

3/4"

- Universal joint
- DIN 3121



6797



6797P


KT NO.	Overall length inch	mm	D mm		
6797	4-1/2	114	44	742	2 / 20
6797P	4-1/2	114	44	742	2 / 20

6798

6798P

3/4"

- Universal joint
- DIN 3121



6798



6798P

KT NO.	Overall length inch	mm	D (mm)	D1 (mm)		
6798	4-1/4	108	44	44	736	2 / 20
6798P	4-1/4	108	44	44	736	2 / 20