




## Rear Wheel Socket

**8534M**



- 4 points
- DIN 3121




| KT NO.  | SQ | D1 mm | D2 mm | ℓ mm | L mm | g   | g | g  |
|---------|----|-------|-------|------|------|-----|---|----|
| 853417M | 17 | 38.0  | 54    | 23.5 | 76   | 628 | 1 | 24 |
| 853419M | 19 | 43.0  | 54    | 23.5 | 76   | 682 | 1 | 24 |
| 853421M | 21 | 47.0  | 54    | 23.5 | 76   | 733 | 1 | 24 |

**8545M**


- DIN 3121
- 17SQ x35MM Isuzu, Mitsubishi, Nissan, Mazda
- 19SQ x41MM Mazda
- 20SQ x38MM Hino, Toyota, Daihatsu
- 20SQ x41MM Hino, Toyota, Daihatsu
- 21SQ x41MM Scania, Isuzu, Hino, Mitsubishi, Nissan



Use for

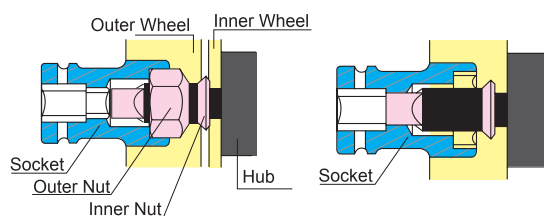

The wheel nut socket fits onto both outer nut and inner nut

| KT NO.    | SQ      | mm | D1 mm | D2 mm | ℓ mm | L mm | g | g  | g |
|-----------|---------|----|-------|-------|------|------|---|----|---|
| 85451735M | 17 x 35 | 54 | 54    | 13    | 83   | 1042 | 1 | 24 |   |
| 85451941M | 19 x 41 | 55 | 54    | 14    | 87   | 985  | 1 | 24 |   |
| 85452038M | 20 x 38 | 58 | 54    | 14    | 83   | 1099 | 1 | 24 |   |
| 85452041M | 20 x 41 | 58 | 54    | 14    | 87   | 1086 | 1 | 24 |   |
| 85452141M | 21 x 41 | 58 | 54    | 14    | 87   | 1071 | 1 | 24 |   |

## Impact Bit Socket

**8015M**


- Hexagon head
- DIN 3121



| KT NO.  | mm  | L mm | g   | g | g  |
|---------|-----|------|-----|---|----|
| 801519M | H19 | 75   | 860 | 1 | 24 |

**1954**

**809622M**



- Hex bit & bit holder
- DIN 3121



1954




809622M

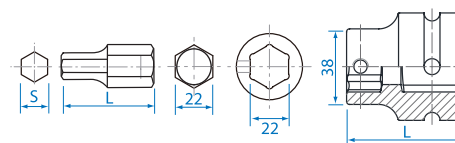

| KT NO.  | S mm | L mm | Max. torq Nm | g   | g  | g   |
|---------|------|------|--------------|-----|----|-----|
| 195419H | H19  | 54.5 | 1577         | 140 | 12 | 120 |
| 195422H | H22  | 54.5 | 2436         | 162 | 12 | 120 |
| 195424H | H24  | 54.5 | 2436         | 176 | 10 | 100 |
| 195427H | H27  | 54.5 | 2436         | 200 | 10 | 100 |
| 195430H | H30  | 54.5 | 2436         | 232 | 6  | 60  |
| 195432H | H32  | 54.5 | 2436         | 243 | 6  | 60  |
| 809622M | 22   | 58.0 | -            | 756 | 1  | 24  |

**809622MxxH**


- Hexagon head
- DIN 3121



| KT NO.     | S mm | mm | L (mm) | Max. torq Nm | g   | g | g  |
|------------|------|----|--------|--------------|-----|---|----|
| 809622M19H | H19  | 22 | 93     | 1577         | 896 | 1 | 10 |
| 809622M22H | H22  | 22 | 93     | 2436         | 918 | 1 | 10 |
| 809622M24H | H24  | 22 | 93     | 2436         | 932 | 1 | 10 |
| 809622M27H | H27  | 22 | 93     | 2436         | 956 | 1 | 10 |
| 809622M30H | H30  | 22 | 93     | 2436         | 988 | 1 | 10 |
| 809622M32H | H32  | 22 | 93     | 2436         | 999 | 1 | 10 |