

Closed – End wire Connectors




Material

Insulation: Nylon

Terminal Body: Copper

Plating: Tin

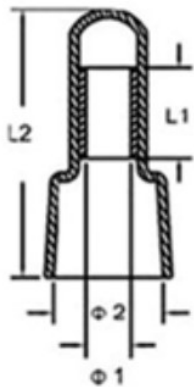

Model	Tube Height (L1)	Total Height (L2)	inside Φ 1	Outside Φ 2	Suitable wires		
					mm ²	AWG	股线
<input type="checkbox"/> CE-1	6.8	17.8	2.5	6.3	1.25	22-16	3.5-1.75
<input type="checkbox"/> CE-2	7.0	20.0	3.0	8.0	2.0	22-14	1.0-3.0
<input type="checkbox"/> CE-5	8.0	25.5	4.0	10.8	5.5	22-10	2.5-6.0
<input type="checkbox"/> CE-8	12.4	27.7	5.3	13.8	8.0	16-14	2.5-6.0

ITEM.NO.	A(mm)	W		D(mm)	mm ²	SUITABLE WIRES
		B(mm)	C(mm)			AWG
CE1 - Φ3	18	9	3.6	2.8	1.25	22-16
CE2 - Φ4	21	9.5	3.9	3	2	16-14
CE3 - Φ5	22.5	10.5	4.8	4	5.5	12-10
CE5 - Φ6	24	12	5.6	4.8	8	8
CE8 - Φ8	25.5	14	7.5	6	13	6
CE10 - Φ10	29.5	15.5	9.3	7.8	16	4

ITEM.NO.	A(mm)	W		D(mm)	mm ²	SUITABLE WIRES
		B(mm)	C(mm)			AMG
CE1 - Φ3	18	9	3.6	2.8	1.25	22-16
CE2 - Φ4	21	9.5	3.9	3	2	16-14
CE3 - Φ5	22.5	10.5	4.8	4	5.5	12-10
CE5 - Φ6	24	12	5.6	4.8	8	8
CE8 - Φ8	25.5	14	7.5	6	13	6
CE 10 - Φ10	29.5	15.5	9.3	7.8	16	4