



ĐÈN LED CHIẾU SÁNG ĐƯỜNG 06




CSD06 80W

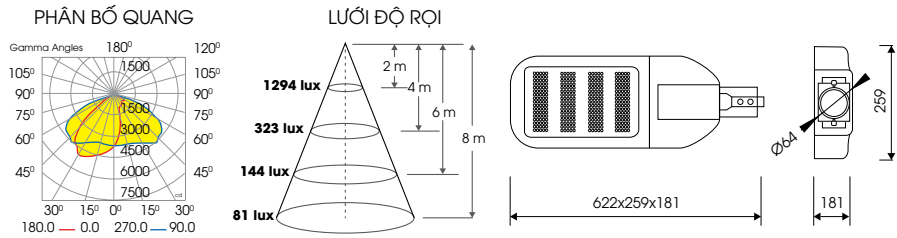


CSD06 100W

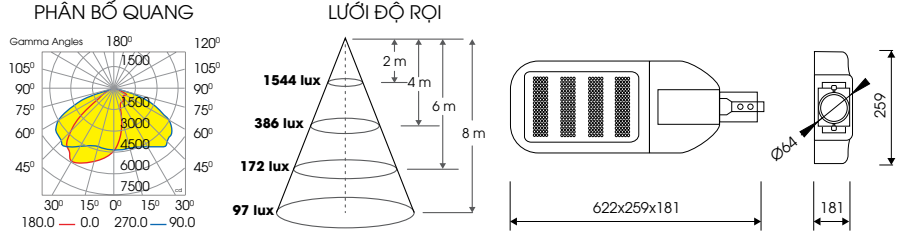

CSD06 120W

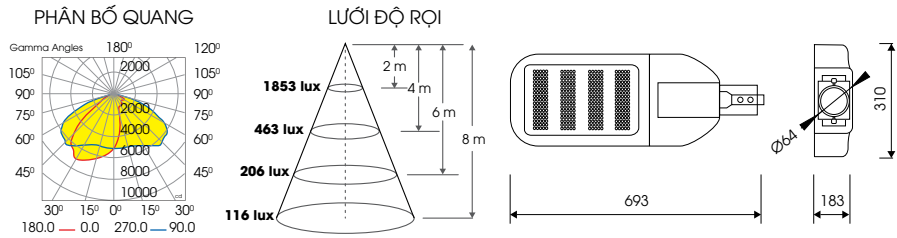

CSD06 150W

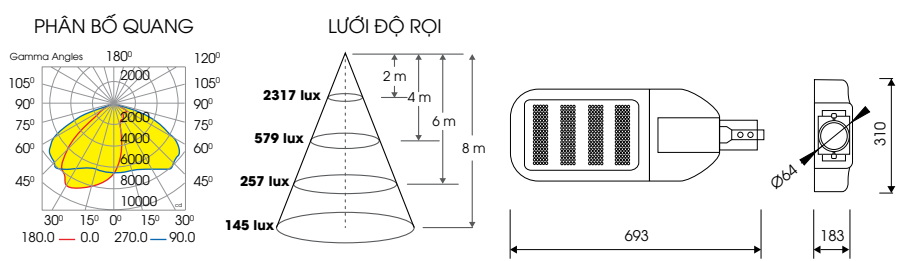

Model	Công suất	Dải điện áp hoạt động	Hệ số công suất	Hiệu suất sáng	Quang thông	Nhiệt độ màu	Khả năng chịu xung sét	Chỉ số hoàn màu	Tuổi thọ	Cấp bảo vệ	Đường kính lỗ cột đèn	Kích thước (DxRxH)
CSD06 80W	W	V		lm/W	lm	K	kV		Giờ		mm	mm
CSD06 80W	80	100÷277	0.95	130	10400	4000/5000	10	≥70	50000	IP66,IK08	Ø64	622x259x181
CSD06 100W	100	100÷277	0.95	130	13000	4000/5000	10	≥70	50000	IP66,IK08	Ø64	622x259x181
CSD06 120W	120	100÷277	0.95	130	15600	4000/5000	10	≥70	50000	IP66,IK08	Ø64	693x310x183
CSD06 150W	150	100÷277	0.95	130	19500	4000/5000	10	≥70	50000	IP66,IK08	Ø64	693x310x183
CSD06 100W.EV	100	100÷277	0.9	95-95	9500-9500	3000/4000/5000/65000	10	80	20000	IP66,IK08	Ø64	328x282x78