
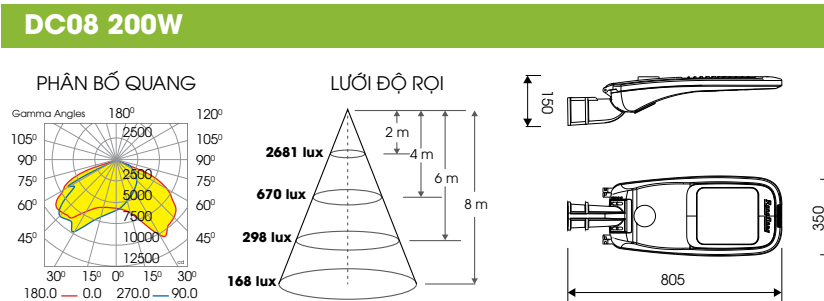
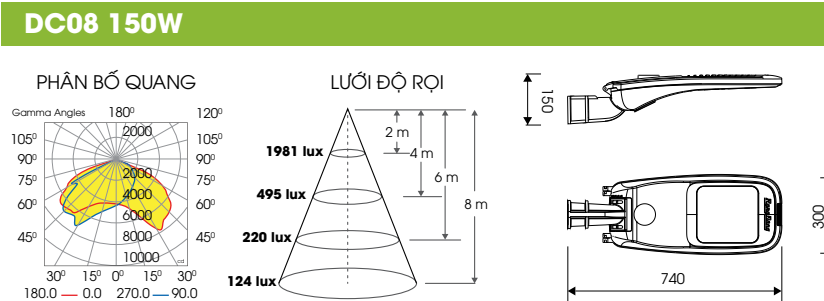
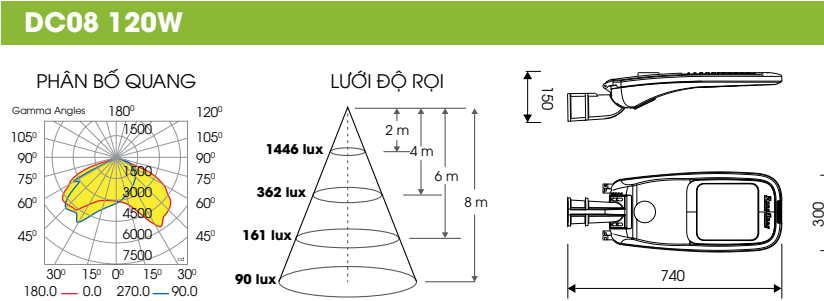
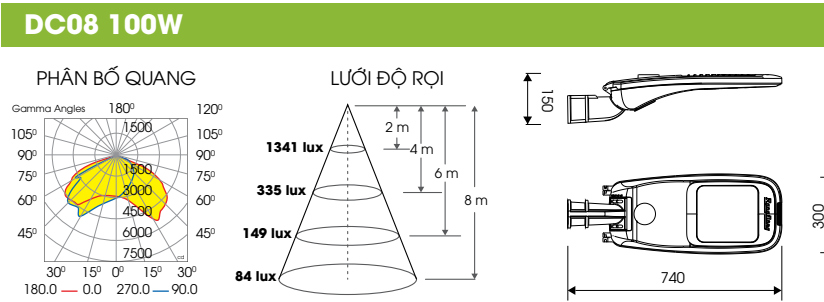


ĐÈN LED CHIẾU SÁNG ĐƯỜNG 08

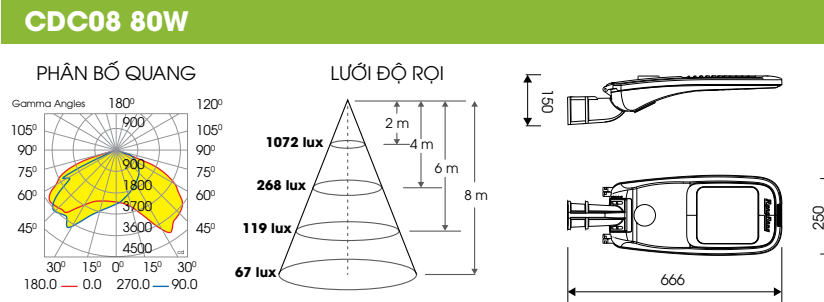

Model	Công suất	Dải điện áp hoạt động	Hệ số công suất	Hiệu suất sáng	Quang thông	Nhiệt độ màu	Khả năng chịu xung sét	Chỉ số hoàn màu	Tuổi thọ (giờ)	Cấp bảo vệ	Đường kính lỗ cột đèn	Kích thước (DxRxC)
	W	V		lm/W	lm	K	kV		giờ		mm	
CSD08 80W	80	100÷277	0.9	130	10400	4000/5000	10	≥70	50000	IP66,IK08	Ø64	666x250x150
CSD08 100W	100	100÷277	0.95	130	13000	4000/5000	10	≥70	50000	IP66,IK08	Ø64	740x300x150
CSD08 120W	120	100÷277	0.95	130	14040	4000/5000	10	≥70	50000	IP66,IK08	Ø64	740x300x150
CSD08 150W	150	100÷277	0.95	130	19500	4000/5000	10	≥70	50000	IP66,IK08	Ø64	740x300x150
CSD08 200W	200	100÷277	0.95	130	26000	4000/5000	10	≥70	50000	IP66,IK08	Ø64	805x350x150