

3.4 Specification data

Rated voltage	Operation voltage VDC(≤)	Release voltage VDC(≥)	Coil resistance Ω ±10%
5	3.75	0.5	28
6	4.5	0.6	44
12	9.0	1.2	160
24	18.0	2.4	640
36	27.0	3.6	1440
48	36.0	4.8	2560
110	82.5	11.0	14500
127	95.3	12.7	17000
220	165.0	22.0	39000

Rated voltage	Operation voltage VDC(≤)	Release voltage VDC(≥)	Coil resistance Ω ±10%
6	4.8	1.2	10.5
12	9.6	2.4	44
24	19.2	4.8	180
36	28.8	7.2	380
48	38.4	9.6	650
110	88.0	22	3670
127	101.6	25.4	4100
220	176.0	44	14500
380	304.0	76	39000

4. Matching socket (optional)

Relay model	JQX-13F(D)/2Z			
Model of matching socket	CZT08A-01	CZT08A-02	CZT08B-01	CZT08B-01E
Overall dimensions of socket (mm)	72×30×31	72×23×31	68×30×28	68×30×28
Type of socket lead	Screw terminal (installation type, rail type)			

5. Overall and mounting dimensions (mm)


Connection diagram (bottom view) (2Z)




Connection diagram (bottom view) 2Z(D)




Connection diagram (bottom view) 2Z(B)

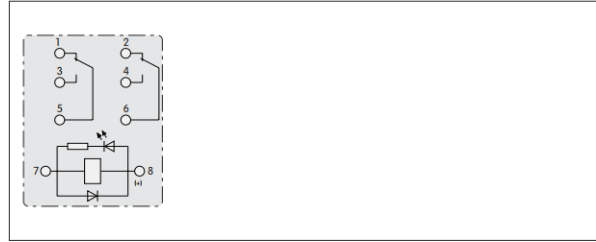


PCB opening drawing (2Z)

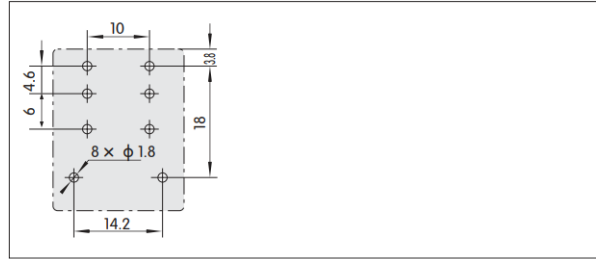


Outline drawing (plug-in type)

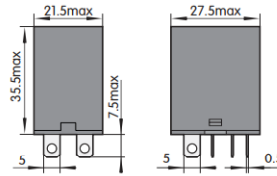

Outline drawing (PCB type)

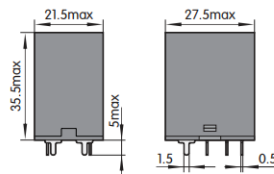

Outline drawing (lateral flange type)

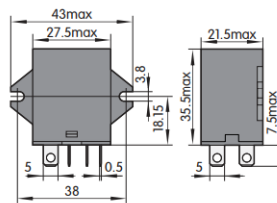

Outline drawing (top flange type)

