



Cordless Power Cutter DCE090 230 mm (9")



Max cutting depth
88 mm

Cordless
Powered by two 18V LXT
Li-Ion batteries in series



18v + 18v → 36v

BL
MOTOR

AFT

(BRAKE)

XPT

Efficient cutting by BL motor & User protection systems



**BL
MOTOR**



XPT



① Overload warning LED lamp

- alerts operator of overload with a red blinking LED.
- reduces unnecessary battery recharging by overload protection.



② LED job light

- enables operation in the dark sites where electricity is not supplied.



③ Battery cover

- protects battery from water in wet cutting.



④ Water supply kit can be connected.


- The hose is designed to run inside the tool housing to prevent from being caught in objects.

(BRAKE) Electric brake

- After the switch trigger is released:
 - Diamond wheel stops in approximately 4.0 seconds
 - Cut-off wheel stops in approximately 2.0 seconds

AFT Active Feedback sensing Technology

shuts down current to the motor to protect user, if the rotation speed suddenly slows down (in the case of kick-back, etc.).

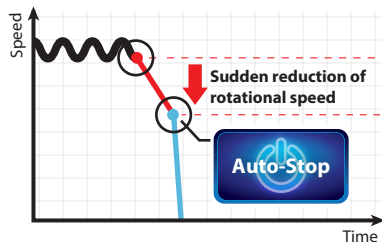

Accessories

Abrasive Cut-off Wheel / Innox

Part No. E-03006
230 x 2.0 x 22.23 WA36R



Diamond Wheel 230mm Segmented

Part No. E-02967
230 x 22.23 Dry & Wet



230mm Diamond wheel ideal for cordless power cutter

- New diamond wheel with even pattern placement of diamond grits
- The grit arrangement provides sharp cutting edge constantly.

Charging Time

18V LITHIUM-ION	DC18RC	DC18RD	DC18SD
BL1815N 1.5Ah	15 min	30 min	
BL1820B 2.0Ah	24 min	45 min	
BL1830B 3.0Ah	22 min	60 min	
BL1840B 4.0Ah	36 min	90 min	
BL1850B 5.0Ah	45 min	110 min	
BL1860B 6.0Ah	55 min	130 min	

Cordless Power Cutter

DCE090 230 mm (9")

- Brake
- Soft Start
- Built-in Job Light

Wheel Diameter	230 mm (9")
Wheel Hole Diameter	22.23 mm (7/8")
Max Wheel Thickness	3.0 mm (1/8")
Max Cutting Capacity	88 mm (3-1/2")
No Load Speed (RPM)	6,600
Vibration Level	Left / Right: 5.9 / 4.0 m/s ²
Sound Pressure Level	103 dB(A)
Sound Power Level	114 dB(A)
Dimensions (L x W x H)	554x241x283 mm (21-3/4"x9-1/2"x11-1/8")
Net weight	5.6 - 6.3 kg
DCE090ZK2:	No battery, charger.
DCE090T2K2:	DC18RD two port fast charger, battery BL1850B set.

Standard Equipment: Diamond wheel 230mm segmented (E-02967), hex. Wrench 4 (783202-0), wrench 13-16 (782023-7), coupling sleeve (123121-2).

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

CÔNG TY TNHH MAKITA VIỆT NAM

Kho 4-5-6, Block 16, 18/12 Đường số 3, KCN VSP, P. Hòa Phú, TP. Thủ Đức, Bình Dương
ĐT: 0274 362 8338 - Fax: 0274 362 8339 - Website: www.makita.com.vn

CHI NHÁNH CTY TNHH MAKITA VN TẠI MIỀN BẮC
Khu 5, Số 1, Đường Số 6, KCN - BT - DV VSP Bắc Ninh, X. Phú Chấn,
TX. Từ Sơn, T. Bắc Ninh.
ĐT: 0222 376 5942 Fax: 0222 376 5941

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HÀ NỘI
65 Trường Chinh, P. Phương Liệt, Q. Thanh Xuân, TP. Hà Nội,
ĐT: 0243 202 2385

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH ĐÀ NẴNG
102 Triều Nữ Vương, P. Hải Châu 2, Q. Hải Châu, TP. Đà Nẵng,
ĐT: 0236 352 5078 / 0236 352 5179 Fax: 0236 352 5479

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH CẦN THƠ
386 Võ Văn Kiệt, Khu Vực 5, P. An Thới, Q. Bình Thủy,
TP. Cần Thơ.
ĐT: 0292 389 4358 Fax: 0292 389 4359

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH BUỒN MA THUỘT
89 Lê Đức Thọ, P. Thống Nhất, TP. Buôn Ma Thuột, T. Đắk Lắk,
ĐT: 0262 355 4556 Fax: 0262 355 4557

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HẢI PHÒNG
Số 01 Lô D401, Dự án Hoàng Huy Riverside, P. Thượng Lý,
Q. Hồng Bàng, TP. Hải Phòng.
ĐT: 0225 883 1529

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH NHA TRANG
Lô 36 - 38 đường BS, Khu đô thị Vinh Diễm Trung, Xã Vinh Ngọc, TP. Nha Trang, T. Khánh Hòa
ĐT: 0258 220 0039

TRUNG TÂM DỊCH VỤ KHÁCH HÀNG
CHI NHÁNH HỒ CHÍ MINH
Số 12 Trịnh Văn Căn, P. Cầu Ông Lãnh, Q. 1, TP. Hồ Chí Minh,
ĐT: 0283 821 5191