

C Type

The Standard HMI C Type is equipped with 3 Serial Communication Ports, which allows easy and fast connection to other devices, meeting diverse requirements.



Product Introduction

Features

- Multiple size options: 5.6" / 7" / 10.1" / 10.4"
- High-performance CPU: Cortex-A8
- Highly integrated design: Built-in 3 serial communication ports (D-Sub x 2), USB, and more.
- Security isolation protection: Power isolation
- Certification: CE / UL

Applications



Machinery and equipment in various sectors such as packaging, textiles, woodworking, rubber, and plastics

Product Specifications

	DOP-105CQ	DOP-107CV	DOP-110CS	DOP-110CG
Display	5.6" TFT	7" TFT	10.1" TFT	10.4" TFT
Resolution (Pixels)	320 x 234	800 x 480	1,024 x 600	800 x 600
Color		16-bit		
CPU		Cortex-A8 800 MHz		
ROM		256 MB		
RAM		256 MB		
COM Port		3 Serial COM Ports		
USB		1 Slave / 1 Host		
Certification		CE / UL		
Operating Temperature		0 ~ 50°C		
Storage Temperature		-20 ~ 60°C		

Dimensions

DOP-107CV

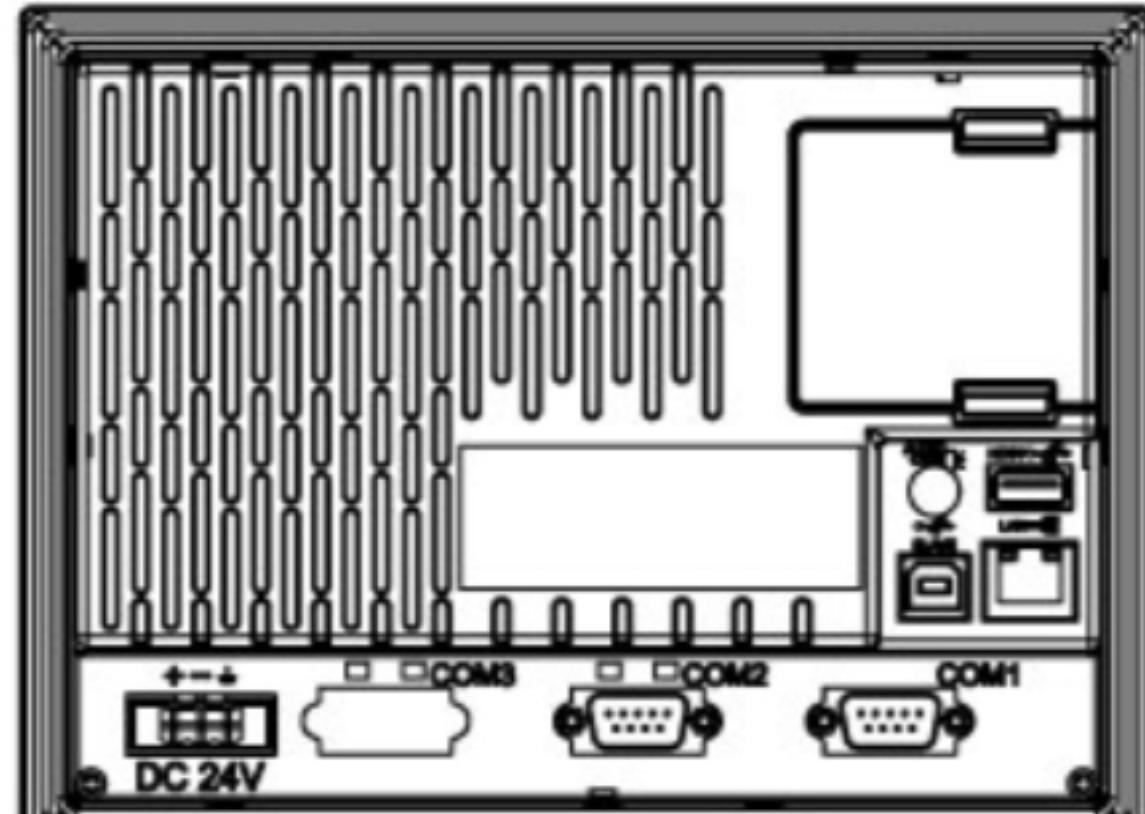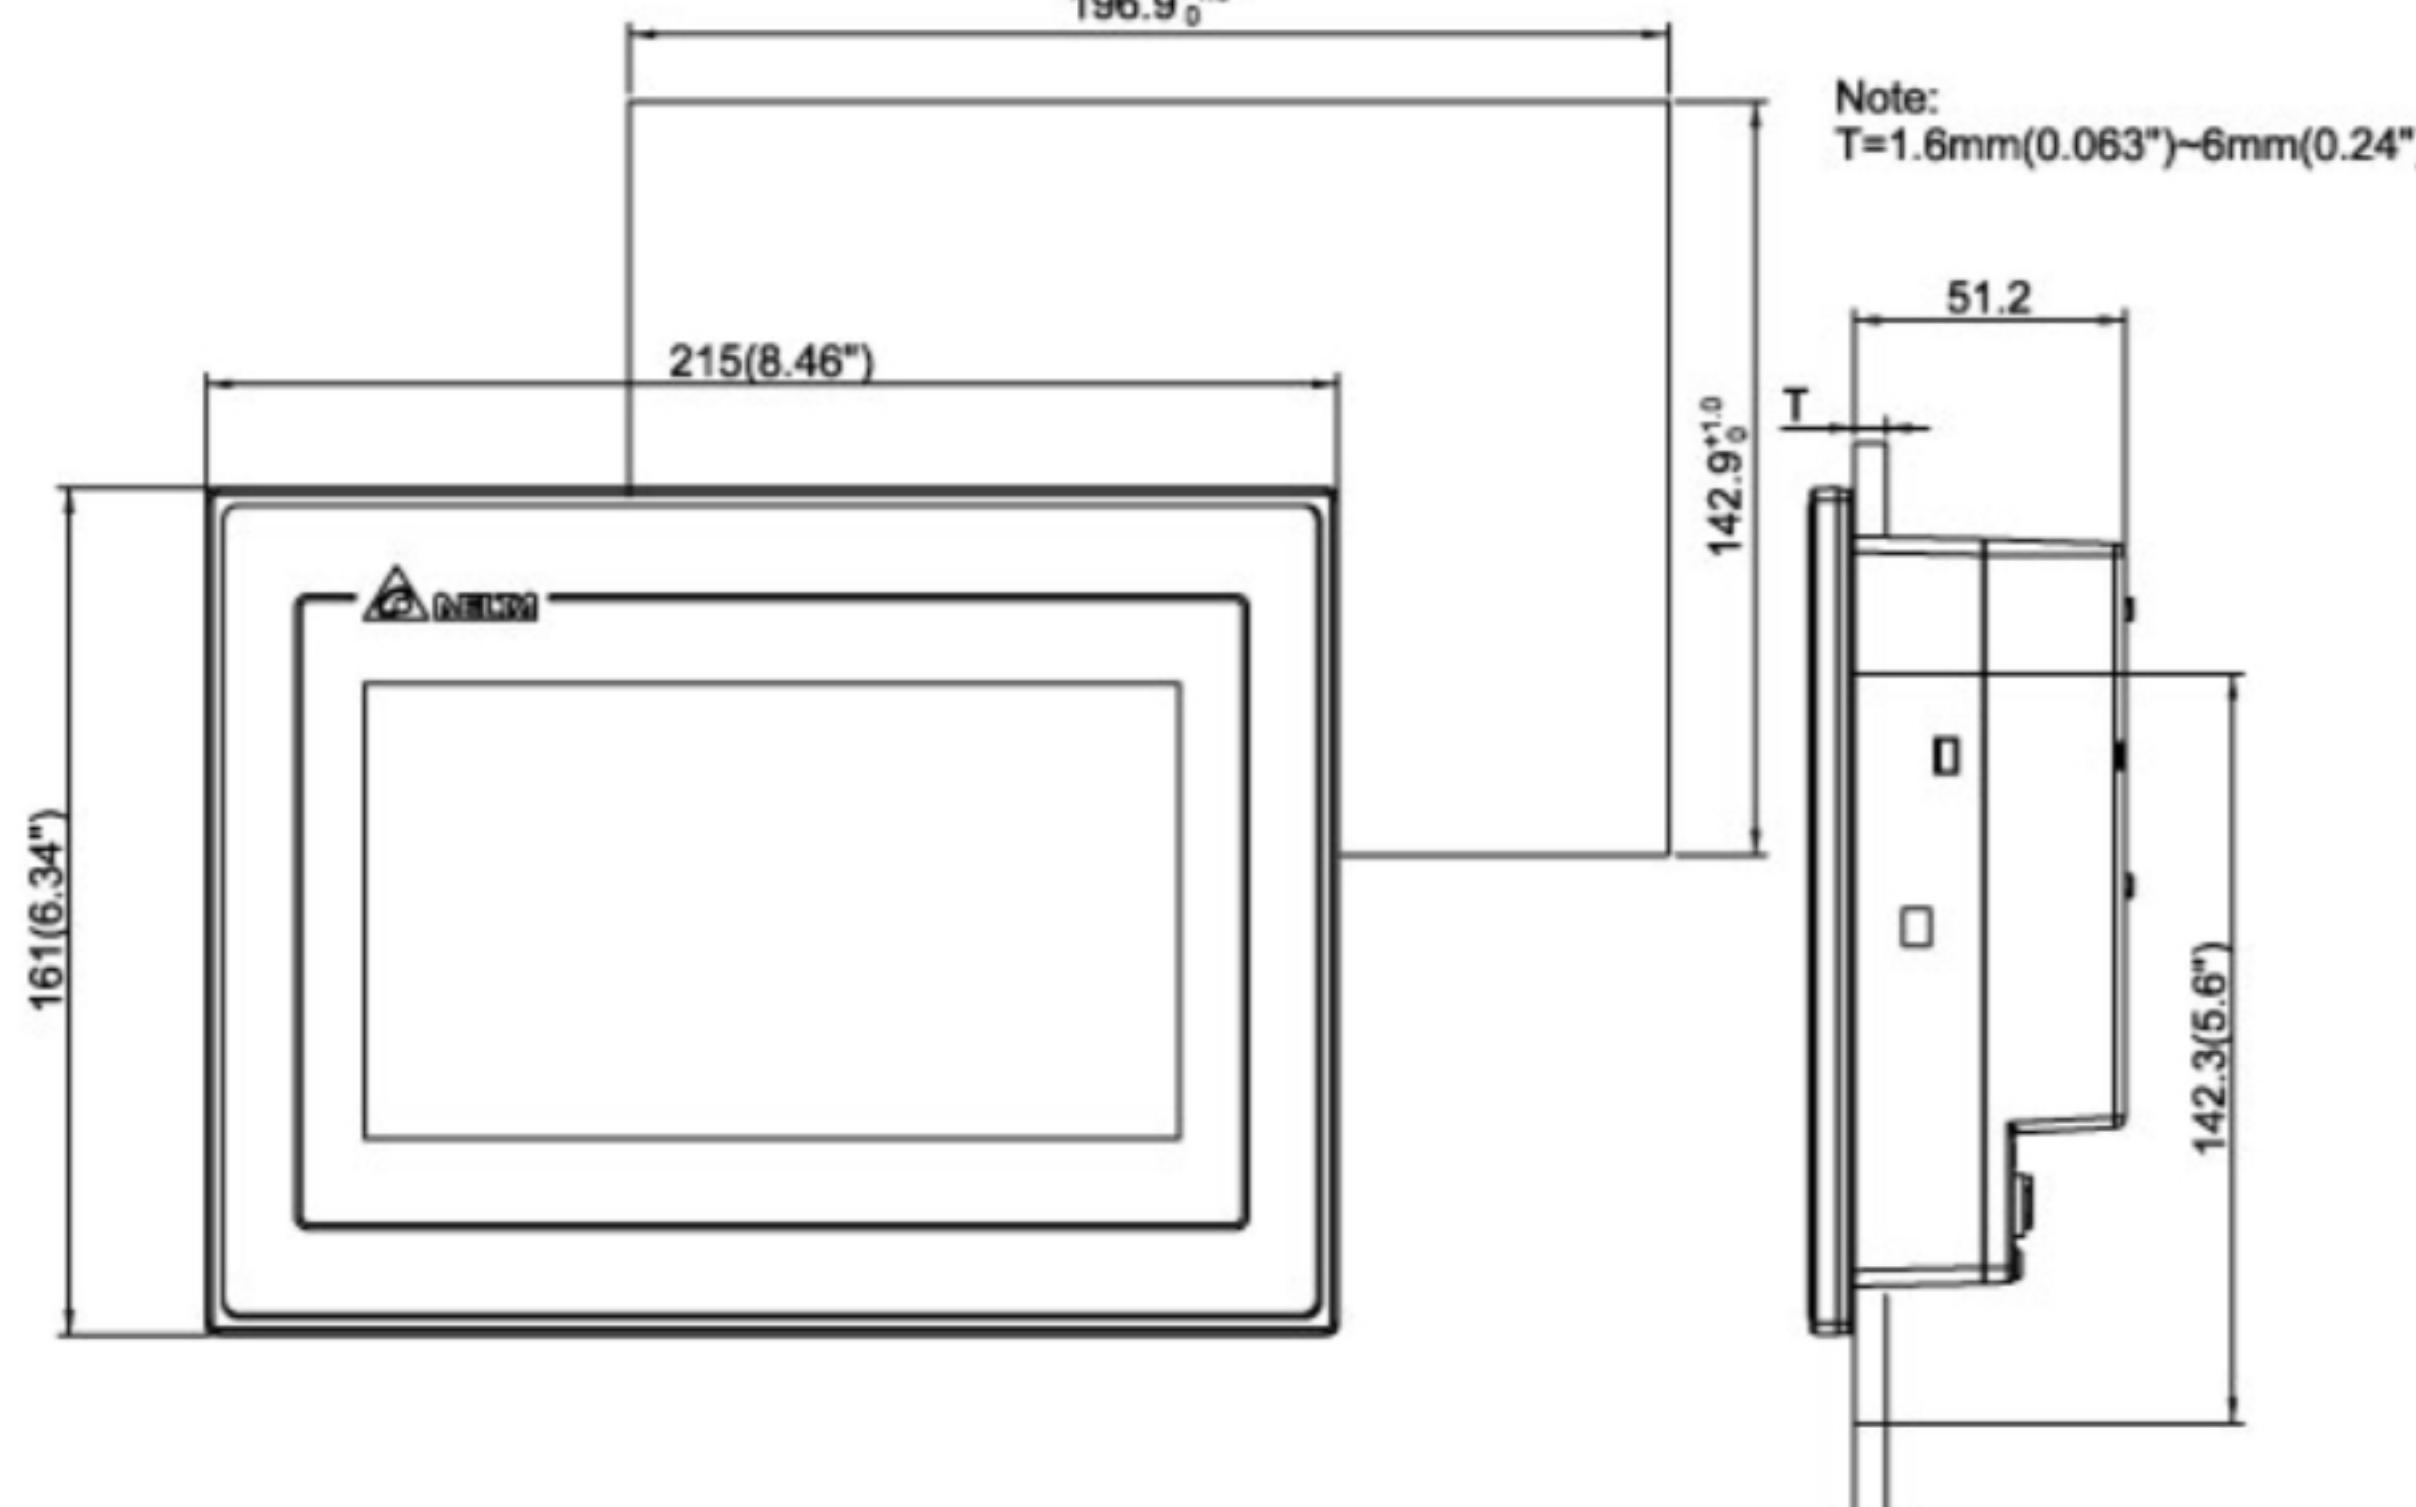

Dimensions (W x H x D, mm)

Mounting Dimensions (W x H, mm)

DOP-105CQ	184 x 144 x 50	172.4 x 132.4
DOP-107CV	215 x 161 x 61.2	196.9 x 142.9
DOP-110CS	272 x 200 x 61	261.3 x 189.3
DOP-110CG	299 x 224 x 46.8	285.2 x 210.2