

HAKKO Original Paint Hose Series

Fittings for Paint Hose Series

Fittings for Solvent Transfer Hose

- Applicable Hose
Solvent Transfer Hose
(E-SV)



**Fixed Type(E-EM)**RoHS2
free

Image	Model Number	Type	Applicable Hose Model Number	Thread	Sheet	Material	Product Weight g/piece
	E-EM-75-G1/4-B	Female Screw (Fixed)	E-SV-7	G1/4	Male Sheet	Brass Nickel Plating	48
	E-EM-75-G3/8-B			G3/8			61
	E-EM-95-G3/8-B		E-SV-9	G3/8			85
	E-EM-75-G1/4-S		E-SV-7	G1/4		Wetted Part : SUS304 Nut : Brass Nickel Plating	47
	E-EM-75-G3/8-S			G3/8			59

■ How to Install the Fittings for Paint Hose Series

1. Pass the tightening nut through the hose.	2. Insert the hose into the nipple. Make sure the hose reaches the root of the nipple. Slide the nut onto the hose.	3. Use a wrench to securely fasten the nut.	4. After the joint is installed at both sides of the hose, please check electric continuity by tester.


The Shape of Sheet Surface on Threaded Portion of Hose Joint

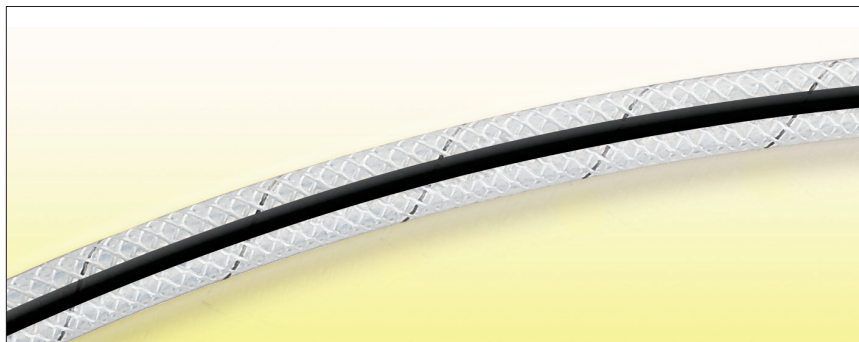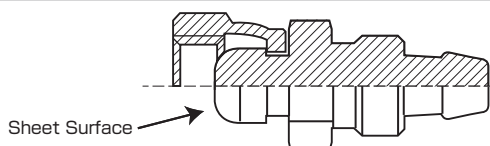


At the other side, please select parallel thread of Female Sheet

Paint-Flex Series Original Fittings

■ Applicable Hose
Paint Flex-Fluorine Hose
[E-PFF]

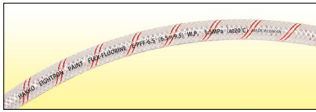


■ Applicable Hose
Paint Flex-Nylon Hose
[E-PFN]

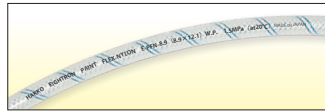

■ Applicable Hose
Solvent Transfer Hose
[E-SV]





■ Applicable Hose
Paint Flex-Fluorine Hose
(Ground Wire Type)
[E-PFFG]

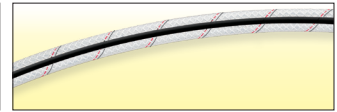

RoHS2
free

Image	Model Number	Type	Applicable Hose Model Number	Thread	Sheet	Material	Product Weight g/piece
	E-FS-6.5-G1/4	Female Screw (Fixed)	E-PFF-6.5	G1/4	Male Sheet	Wetted Part : SUS304	52
	E-FS-6.5-G3/8		E-PFFG-6.5	G3/8		Nut : Brass Nickel Plating	64
	E-FB-6.5-G1/4		E-PFN-6.5	G1/4		Brass Nickel Plating	54
	E-FB-6.5-G3/8		E-SV-6.5	G3/8			66
	E-FB-8.9-G1/4		E-PFN-8.9	G1/4			74
	E-FB-8.9-G3/8			G3/8			82
	E-FSG-6.5-G1/4	Female Screw (Fixed)	E-PFF-6.5	G1/4	Male Sheet	Wetted Part : SUS304	76
	E-FSG-6.5-G3/8		E-PFFG-6.5	G3/8		Nut : Brass Nickel Plating	88
	E-FBG-6.5-G1/4		E-PFN-6.5	G1/4		Brass Nickel Plating	78
	E-FBG-6.5-G3/8		E-SV-6.5	G3/8			90
	E-FBG-8.9-G1/4		E-PFN-8.9	G1/4			100
	E-FBG-8.9-G3/8			G3/8			110

Specification

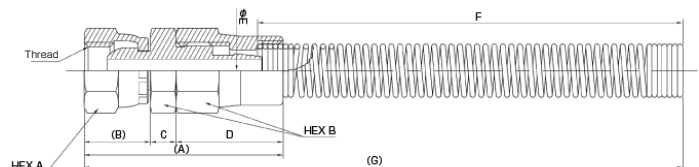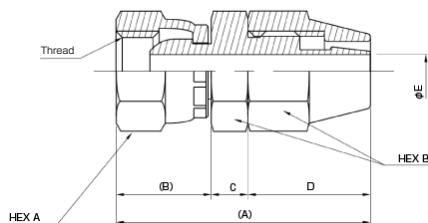

Material Wetted Part : SUS304, Nut : Brass Nickel Plate (RoHS2 Compliant)

Model Number	Dimension							Thread
	A	B	C	D	E	HEX A	HEX B	
E-FS-6.5-G1/4	42	16	6	20	5.5	17	17	G1/4
E-FS-6.5-G3/8	43	17	6	20	5.5	21	17	G3/8

Material Nut: Brass Nickel Plate (RoHS2 Compliant)

Model Number	Dimension							Thread
	A	B	C	D	E	HEX A	HEX B	
E-FB-6.5-G1/4	42	16	6	20	5.5	17	17	G1/4
E-FB-6.5-G3/8	43	17	6	20	5.5	21	17	G3/8
E-FB-8.9-G1/4	48	16	7	25	7.5	17	19	G1/4
E-FB-8.9-G3/8	49	17	7	25	7.5	21	19	G3/8

Material: Wetted Part: SUS304, Nut: Brass Nickel Plate (RoHS2 Compliant), Hose Guide: SUS304

Model Number	Dimension									Thread
	A	B	C	D	E	F	G	HEX A	HEX B	
E-FSG-6.5-G1/4	47	16	6	25	5.5	100 ~ 120	140 ~ 160	17	17	G1/4
E-FSG-6.5-G3/8	48	17	6	25	5.5	100 ~ 120	140 ~ 160	21	17	G3/8

Material: Brass Nickel Plate (RoHS2 Compliant), Hose Guide : SUS304

Model Number	Dimension									Thread
	A	B	C	D	E	F	G	HEX A	HEX B	
E-FBG-6.5-G1/4	47	16	6	25	5.5	100 ~ 120	140 ~ 160	17	17	G1/4
E-FBG-6.5-G3/8	48	17	6	25	5.5	100 ~ 120	140 ~ 160	21	17	G3/8
E-FBG-8.9-G1/4	53	16	7	30	7.5	100 ~ 120	140 ~ 160	17	19	G1/4
E-FBG-8.9-G3/8	54	17	7	30	7.5	100 ~ 120	140 ~ 160	21	19	G3/8

Contact us if you have any inquiries about HAKKO products.

HAKKO
CORPORATION

HAKKO CORPORATION

HEAD OFFICE / SALES DEPARTMENT

Unity Forum 5F, 42-18, 1-Chome, Itabashi, Itabashi-Ku, Tokyo 173-0004, Japan
TEL +81-(0)3-3963-5381 FAX +81-(0)3-3961-4400

OSAKA OFFICE

Akatsuki Building 7F, 13-45, Toyotsu-cho, Suita-shi, Osaka 564-0051, Japan
TEL +81-(0)6-6310-6880

SAITAMA FACTORY · AKITA FACTORY

URL: <https://hakko-eightron.com/>