

F2E-150S/B




- ⚡ Frame: Aluminum die-casting, surface is finished by anti-corrosion treatment with black color.
- ⚡ Impeller: PBT
- ⚡ Protection: Motor internal with automatic recovery thermal protector
- ⚡ Withstand Voltage: AC 1,800, 1 min at 0.5mA, 50/60 Hz
- ⚡ Insulation Grade: Design according to IEC61858 Grade F

F2E-150S/B Certification:CE/CQC Air Ventilation

- Frame: Aluminum die-casting, surface is finished by anti-corrosion treatment with black color.
- Impeller: PBT
- Protection: Motor internal with automatic recovery thermal protector
- Withstand Voltage: AC 1,800, 1 min at 0.5mA, 50/60 Hz
- Insulation Grade: Design according to IEC61858 Grade F
- Frame: Aluminum die-casting, surface is finished by anti-corrosion treatment with black color.
- Impeller: PBT
- Protection: Motor internal with automatic recovery thermal protector
- Withstand Voltage: AC 1,800, 1 min at 0.5mA, 50/60 Hz
- Insulation Grade: Design according to IEC61858 Grade F

Model	Order Code	Bearing	Voltage V	Frequency Hz	Current (A)	Power (W)	Speed (r/min)	Air Flow (m3/h)	Noise (dB)	Weight (g)
F2E-150S-230	2018.011	Sleeve	220/230	50/60	0.27/0.24	36	2700	375/380	58	860
F2E-150B-230	2018.013	ball								
F2E-150S-115	2018.012	Sleeve	110/115	50/60	0.50	36	2700	375/380	58	900
F2E-150B-115	2018.014	ball								

Dimensions

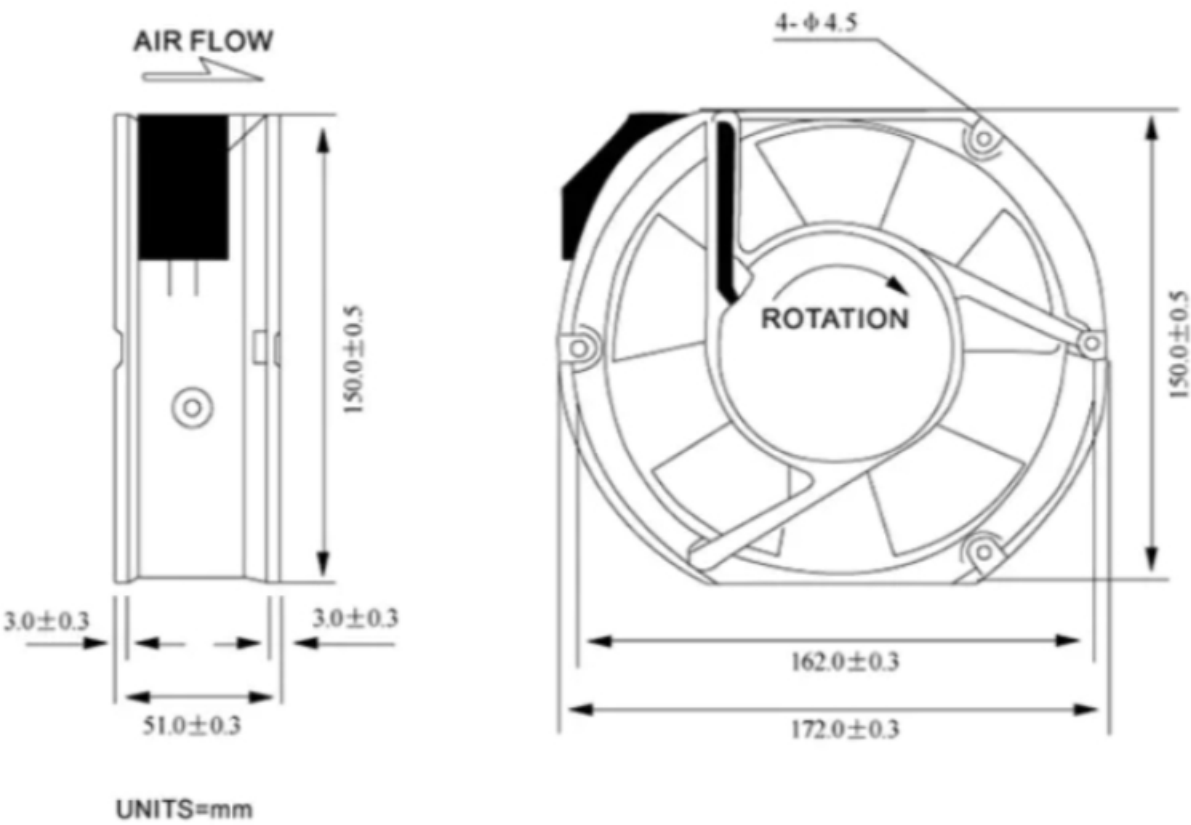

1. Rotation direction of blades: CW seen from the front impellers
2. Power Connection: UL3385-22 Lead wire
3. Unit weight: 0.9kg