


Cabinet Top Ventilator



Certification




Material

ABS/Steel

Retardent Rating

UL94-V2

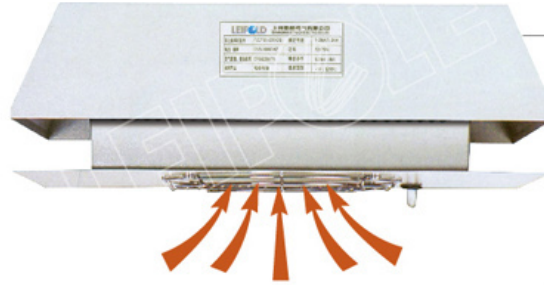

First generation

- F2E190-230-DS
- F2E 220-230-DS
- F2E 225-230-DS



Second generation

- F2E190-230-DP
- F2E 220-230-DP
- F2E 225-230-DP

Introduction of foreign advanced technology, our company research and development on top of the cabinet exhaust fan, this product is a patent product.

Internal

Using the exhaust fan on top is a prerequisite: the ambient temperature is lower than the required temperature within the cabinet.


Features

Powerful centrifugal exhaust fan on top of the main to the discharge of heat load for maximum efficiency. Can avoid using centrifugal fan blower exhaust ordinary magnetic shielding properties of the formation of the cyclone vortex, but also reduce the friction between air and noise. FK series of air inlet ventilation using cascade, to prevent moisture and dust from entering.


Design

Centrifugal exhaust fan on top of unique, beautiful, good function, the structure is more reasonable, do not take up interior space, through its unique design so that it can best apply the requirements of the market today.

Dimensions




Top cabinet opening Fig

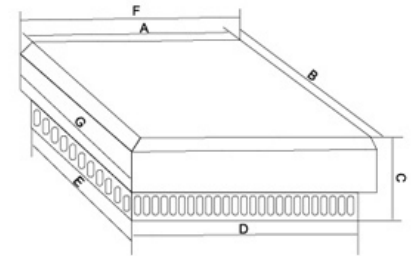

Model	Order number	A/B	C	D/E	F/G	H/I	J	ΦK	Φ1	Φ2	L
F2E190-230-DS	2017.001	310/295	125	375/330	375/315	358/308	100	158	7.8	10	100
F2E 220-230-DS	2017.002	310/295	125	375/330	375/315	358/308	100	158	7.8	10	100
F2E 225-230-DS	2017.003	310/295	125	375/330	375/315	358/308	100	158	7.8	10	100

Model	Order number	A/B	C	D/E	F/G	H/I	J	ΦK	Φ1	Φ2	L
F2E190-230-DP	2017.004	270	130	267	310	226.8	98.4	195	7.8	15	97
F2E 220-230-DP	2017.005	270	130	267	310	226.8	98.4	195	7.8	15	97
F2E 225-230-DP	2017.006	270	130	267	310	226.8	98.4	195	7.8	15	97

Power curve F2E....



Technical data

Model	F2E190-230-DS/P	F2E220-230-DS/P	F2E225-230-DS/P
Rated voltage (V / Hz)	230/50/60		
Air flow, free blowing	570/620m³/h	860/900m³/h	1200/1340m³/h
Air flow With exit filters	1xFK6626.300 456/496m³/h	1xFK6626.300 688/540m³/h	1xFK6626.300 960/1072m³/h
Axial Fan	Electric capacitance		
Rated current (A)	0.26/0.34	0.38/0.40	0.60/0.88
Power (W)	58/75	85/90	135/200
Noise level (dB)	62/64	69/71	73/74
Operating temperature range	-10°C to +55°C		-10°C to +60°C
Remarks	The number of air inlet filter, size according to the specific circumstances.		