

Fan Series

F2E-120S/F2E-120B


| | | |
|---------------|-------------------|------------------|
| Certification | Impeller | Protection class |
| CE | Black plastic PBT | IP33 |

- **Frame** Aluminum die-casting, surfaces is finished by anti-corrosion treatment with primary color or black electrophoresis
- **Impeller** Black plastic PBT UL94V-0
- **Operation Temperature/Humidity**
-30 C ~ +65 C (temperature) 0%~95%(humidity)
- **Withstand Voltage** AC 1,800V, 1 min at 0.5mA, 50/60 Hz
- **Insulation Grade** Design according to IEC61858 Grade F,



120x120x38mm

Dimensions

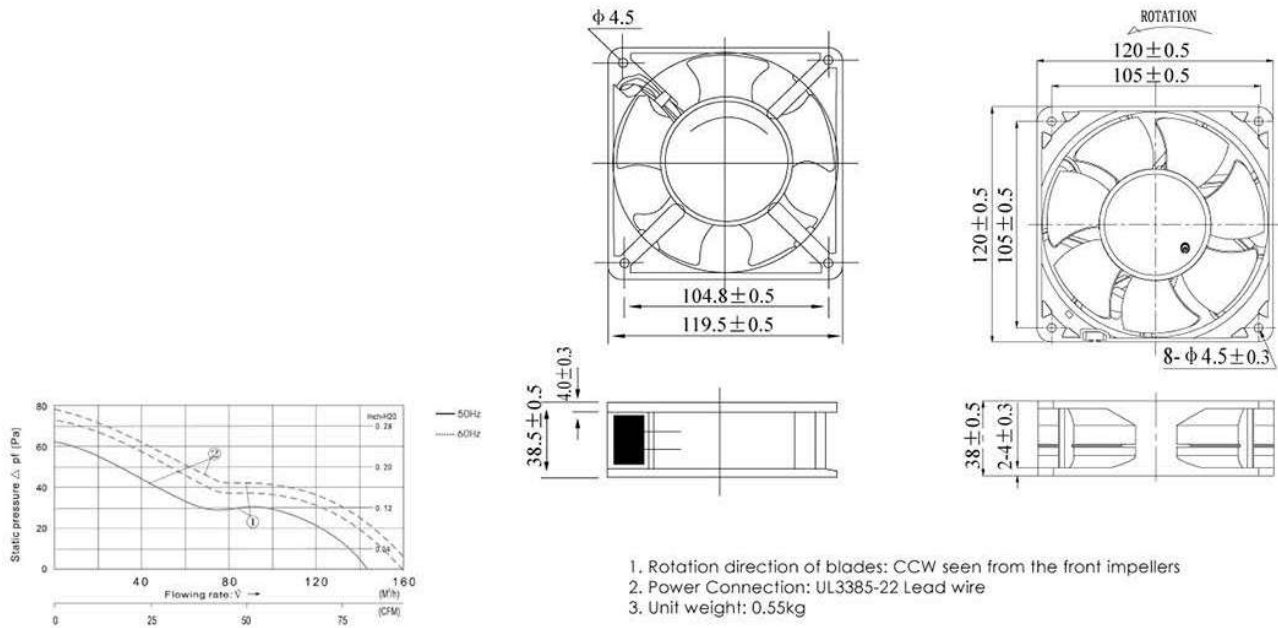

| Model | Order Code | Bearing | Voltage V | Frequency Hz | Current (A) | Power (W) | Speed (r/min) | Air Flow (m³/h) | Noise (dB) | Weight (g) |
|--------------|------------|---------|-----------|--------------|-------------|-----------|---------------|-----------------|------------|------------|
| F2E-120S-230 | 2018.007 | Sleeve | 220/230 | 50/60 | 0.12/0.10 | 19/14 | 2800 | 145/160 | 50/52 | 550 |
| F2E-120B-230 | 2018.009 | ball | | | | | | | | |
| F2E-120S-115 | 2018.008 | Sleeve | 110/115 | 50/60 | 0.24/0.20 | 18/15 | 2800 | 145/160 | 50/52 | 550 |
| F2E-120B-115 | 2018.010 | ball | | | | | | | | |
| F2E-120S-24 | 2018.030 | Sleeve | 24 | 50/60 | 0.40 | 5.7 | 2800 | 178 | 45 | 240 |