



형명분류 / Name classification

HC	2	5	L	—	22	A	L	R	F
HIVERO Control switch	Illuminated push button switch		정격 전압 Rated voltage		A : AC F : Free voltage	LED type	LED 색상 Color of LED	난연 Flame resistance	

형상 Shape	홀치수 Size	정격 전압 Rated voltage	조광방식 Illumination	접점구성 Contacts	형식 Type	
평형 Flat	Ø25	AC/DC 24V	LED	1a1b	HC25L-24FL	
		AC/DC 100-130V	LED	1a1b	HC25L-11FL	
		AC 200-240V	LED	1a1b	HC25L-22AL	
		AC 380V				
		AC 440V	LED	1a1b	HC25L-34AL	
		DC 220V	LED	1a1b	HC25L-22DL	

Color code	
R	적색/Red
G	녹색/Green
Y	황색/Yellow
Bu	청색/Blue
W	백색/White
O	오렌지색/Orange


몸체재질 Body material	
무표시 : 일반	
No mark : General	



자동복귀방식
Automatic reset

형상 및 외형치수 / Shape and Dimensions

HC25L

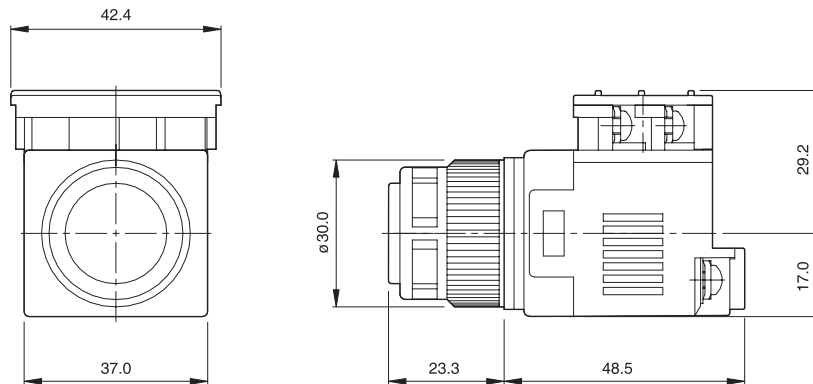

터미널 나사 - M3.5(조임토크 : Max. 0.8N.m)
Terminal screw - M3.5 (Tightening torque : Max. 0.8N.m)


서지보호회로 적용
Applied surge protection circuit

조광형 누름 버튼 스위치 Illuminated Push Button Switch



형명분류 / Name classification

HC	3	0	L	—	22	A	L	R	F
HIVERO Control switch		Illuminated push button switch	정격 전압 Rated voltage		A : AC F : Free voltage	LED type	LED 색상 Color of LED		난연 Flame resistance


 자동복귀방식 Automatic reset	형상 Shape	홀치수 Size	정격 전압 Rated voltage	조광방식 Illumination	접점구성 Contacts	형식 Type
	평형 Flat	∅30	AC/DC 24V	LED	1a1b	HC30L-24FL
			AC/DC 100-130V	LED	1a1b	HC30L-11FL
			AC 200-240V	LED	1a1b	HC30L-22AL
			AC 380V		1a1b	HC30L-34AL
			AC 440V	LED	1a1b	HC30L-34AL
		DC 220V	LED	1a1b	HC30L-22DL	

Color code	
R	적색/Red
G	녹색/Green
Y	황색/Yellow
Bu	청색/Blue
W	백색/White
O	오렌지색/Orange

몸체재질 Body material	
무표시 : 일반	
No mark : General	

형상 및 외형치수 / Shape and Dimensions

HC30L

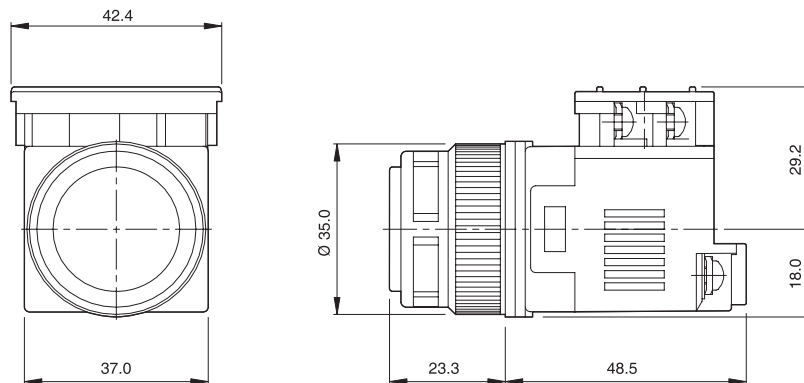

터미널 나사 - M3.5(조임토크 : Max. 0.8N.m)
Terminal screw - M3.5 (Tightening torque : Max. 0.8N.m)

서지보호회로 적용
Applied surge protection circuit