

One-touch Fittings

RoHS

The New “KQ2”

KQ, KQ2, and KJ
consolidated into the “KQ2”

- Enhanced variation
- Lightweight
- Compact



New KQ2 Series



New Oval type release button added!

Applicable tubing O.D.

Metric	ø3.2, ø4, ø6
Inch	ø1/8", ø5/32", ø3/16"



Body type: total of **51** models

Seal method: **3** types

Thread material/Surface treatment (Treated or Non-treated): **2** types*

*1 Brass, Brass + Electroless nickel plating

Applicable tubing	Connection thread	Seal method/Release button shape					
		Sealant		Gasket seal		Face seal	
Oval Type	Round Type	Oval Type	Round Type	Oval Type	Round Type	Oval Type	Round Type
Metric size	M			P.5	P.101		
	R			P.5	P.101		
	G					P.65	P.173
	Uni					P.57	P.165
Inch size	UNF					P.201	
	NPT			P.29	P.133	P.133	
	M			P.49		P.157	P.73
	R			P.49	P.157	P.81	P.185
	Uni			P.95		P.209	P.195

KQ2 Series

 SMC

CAT.ES50-37D

One-touch Fittings KQ2 Series

◎ Improved tube insertion/removal



◎ Compact and lightweight



*1 Tube removal strength is ensured to be equivalent to previous model. *1 Previous KQ2 series model: Male elbow, applicable tubing O.D. ø6, connection thread R1/8

◎ Selectable seal method^{*1}

*1 Connection thread: R, NPT




◎ Selectable surface treatment

- Brass (No plating)
- Brass + Electroless nickel plating

◎ Face seal adopted for threading.

Original thread construction which allows for the use of piping taper female threads (Rc, NPT)


Improved installability (Reduction in amount of tool-tightening required after hand-tightening)

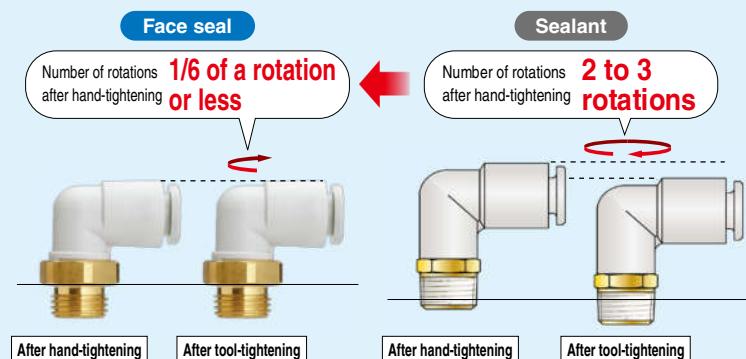

■ Allows for neat and compact piping without protruding threads
<Application example>
Mounted to a blow gun (VMG11W-02-01)



A uniform height when using multiple fittings, contributes to space saving

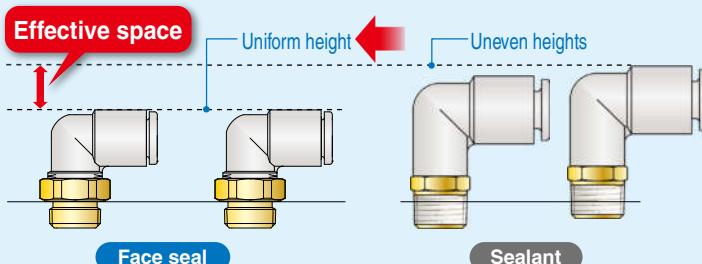

Prevention of sealant residue/protrusion

The current sealant type leaves residue and protrudes out from the threading when installing, making it necessary to clear away the residue using an air blower or similar. However, no residue is created when using a face seal.

Re-piping is possible.

Face seal

Repeated re-piping of up to 6 to 10 times is possible due to use of elastic sealant on seating.

Sealant

Sealant tape is necessary because sealant becomes separated with repeated installation.

Metric size							Inch size							
ø2	ø3.2	ø4	ø6	ø8	ø10	ø12	ø16	ø1/8"	ø5/32"	ø3/16"	ø1/4"	ø5/16"	ø3/8"	ø1/2"
Oval Type	From P.5													
Round Type	From P.10!													

Refer to the next page for details on the applicable tubing sizes of each shape.

Oval Type/Round Type Variations

Hexagon Socket Head Male Connector KQ2S 	45° Male Elbow KQ2K 	Bulkhead Union KQ2E 	Universal Female Elbow KQ2VF
Universal Male Elbow KQ2V 	Extended Male Elbow KQ2W 	Bulkhead Connector KQ2E 	Branch Universal Female Elbow KQ2ZF
Male Connector KQ2H 	Female Connector KQ2F 	Straight Union KQ2H 	Different Diameter Straight KQ2H
Cross KQ2TW 	Male Elbow KQ2L 	Union Elbow KQ2L 	Plug-in Elbow KQ2L
Reducer Elbow KQ2L 	Different Diameter Cross KQ2TX 	Male Branch Tee KQ2T 	Union Tee KQ2T
Different Diameter Tee KQ2T 	Different Diameter Tee KQ2T 	Different Diameter Cross KQ2TY 	Hexagon Socket Head Universal Male Elbow KQ2VS
Branch Male Elbow KQ2LU 	Female Elbow KQ2LF 	Double Universal Male Elbow KQ2VD 	Triple Universal Male Elbow KQ2VT
Branch Universal Male Elbow KQ2Z 	Double Branch Universal Male Elbow KQ2ZD 	Male Run Tee KQ2Y 	Triple Branch Universal Male Elbow KQ2ZT
Branch Union Elbow KQ2LU 	Extended Plug-in Elbow KQ2W 	Male Delta Union KQ2D 	Delta Union KQ2D
Double Branch "Y" KQ2UD 	Different Diameter Double Union "Y" KQ2UD 	Different Diameter Plug-in "Y" KQ2X 	Double Plug-in "Y" KQ2XD
Union "Y" KQ2U 	Different Diameter Union "Y" KQ2U 	Plug-in "Y" KQ2U 	Branch "Y" KQ2U
Plug-in Reducer KQ2R 	Bulkhead Male Elbow KQ2LE 	Tube Cap KQ2C 	

* The supported release button type (oval type/round type) is shown next to each product.



Oval Type Release Button

Sealant/Gasket Seal

Applicable tubing	Connection thread						
	M	R	Rc	UNF	NPT		
Metric	●	●	●			P.5	How to Order P.6 Variations P.7 Dimensions P.9 Made to Order/Clean Series/ Spare Parts P.27
Inch	●	●		●	●	P.29	How to Order P.30 Variations P.31 Dimensions P.33 Made to Order/Clean Series/ Spare Parts P.48
Inch	●	●	●			P.49	How to Order P.50 Variations P.51 Dimensions P.52 Made to Order/Clean Series/ Spare Parts P.55

Face Seal

Applicable tubing	Connection thread						
	G	R	Rc	NPT	R		
Metric	●					P.57	How to Order P.58 Variations P.59 Dimensions P.60 Spare Parts P.63
Metric	●	●				P.65	How to Order P.66 Variations P.67 Dimensions P.68
Inch	●	●	●			P.73	How to Order P.74 Variations P.75 Dimensions P.76
Inch	●	●		●	●	P.81	How to Order P.82 Variations P.83 Dimensions P.84

Gasket Seal (Uni Thread)

Applicable tubing	Connection thread					
	Rc	G	NPT	NPTF		
Metric	●	●	●	●	P.87	How to Order P.88 Variations P.89 Dimensions P.90 Made to Order/Clean Series/ Spare Parts P.93
Inch	●	●	●	●	P.95	How to Order P.96 Variations P.97 Dimensions P.98 Made to Order/Clean Series/ Spare Parts P.100

Round Type Release Button

Sealant/Gasket Seal

Applicable tubing		Connection thread					P.101	How to Order..... P.102 Variations..... P.103 Dimensions..... P.105 Made to Order/Clean Series/ Spare Parts..... P.131
Metric	Inch	M	R	Rc	UNF	NPT		
ø2 ø3.2 ø4 ø6 ø8 ø10 ø12 ø16	ø1/8" ø5/32" ø3/16" ø1/4" ø5/16" ø3/8" ø1/2"	●	●	●			P.133	How to Order..... P.134 Variations..... P.135 Dimensions..... P.137 Made to Order/Clean Series/ Spare Parts..... P.156
ø2 ø3.2 ø4 ø6 ø8 ø10 ø12 ø16	ø1/8" ø5/32" ø3/16" ø1/4" ø5/16" ø3/8" ø1/2"	●	●	●			P.157	How to Order..... P.158 Variations..... P.159 Dimensions..... P.160 Made to Order/Clean Series/ Spare Parts..... P.163

Face Seal

Applicable tubing		Connection thread					P.165	How to Order..... P.166 Variations..... P.167 Dimensions..... P.168 Spare Parts..... P.172
Metric	Inch	G	R	Rc	NPT	R		
ø2 ø3.2 ø4 ø6 ø8 ø10 ø12 ø16	ø1/8" ø5/32" ø3/16" ø1/4" ø5/16" ø3/8" ø1/2"	●					P.173	How to Order..... P.174 Variations..... P.175 Dimensions..... P.176
ø2 ø3.2 ø4 ø6 ø8 ø10 ø12 ø16	ø1/8" ø5/32" ø3/16" ø1/4" ø5/16" ø3/8" ø1/2"		●				P.185	How to Order..... P.186 Variations..... P.187 Dimensions..... P.188
ø2 ø3.2 ø4 ø6 ø8 ø10 ø12 ø16	ø1/8" ø5/32" ø3/16" ø1/4" ø5/16" ø3/8" ø1/2"			●			P.195	How to Order..... P.196 Variations..... P.197 Dimensions..... P.198

Gasket Seal (Uni Thread)


Applicable tubing		Connection thread				P.201	How to Order..... P.202 Variations..... P.203 Dimensions..... P.204 Made to Order/Clean Series/ Spare Parts..... P.207	
Metric	Inch	Rc	G	NPT	NPTF			
ø2 ø3.2 ø4 ø6 ø8 ø10 ø12 ø16	ø1/8" ø5/32" ø3/16" ø1/4" ø5/16" ø3/8" ø1/2"	●	●	●	●		P.209	How to Order..... P.210 Variations..... P.211 Dimensions..... P.212 Made to Order/Clean Series/ Spare Parts..... P.214
ø2 ø3.2 ø4 ø6 ø8 ø10 ø12 ø16	ø1/8" ø5/32" ø3/16" ø1/4" ø5/16" ø3/8" ø1/2"	●	●	●	●			

- Prior to Use..... P.215
 Precautions..... P.216
 Safety Instructions..... Back cover

Oval Type Metric Size One-touch Fittings

Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

KQ2 Series

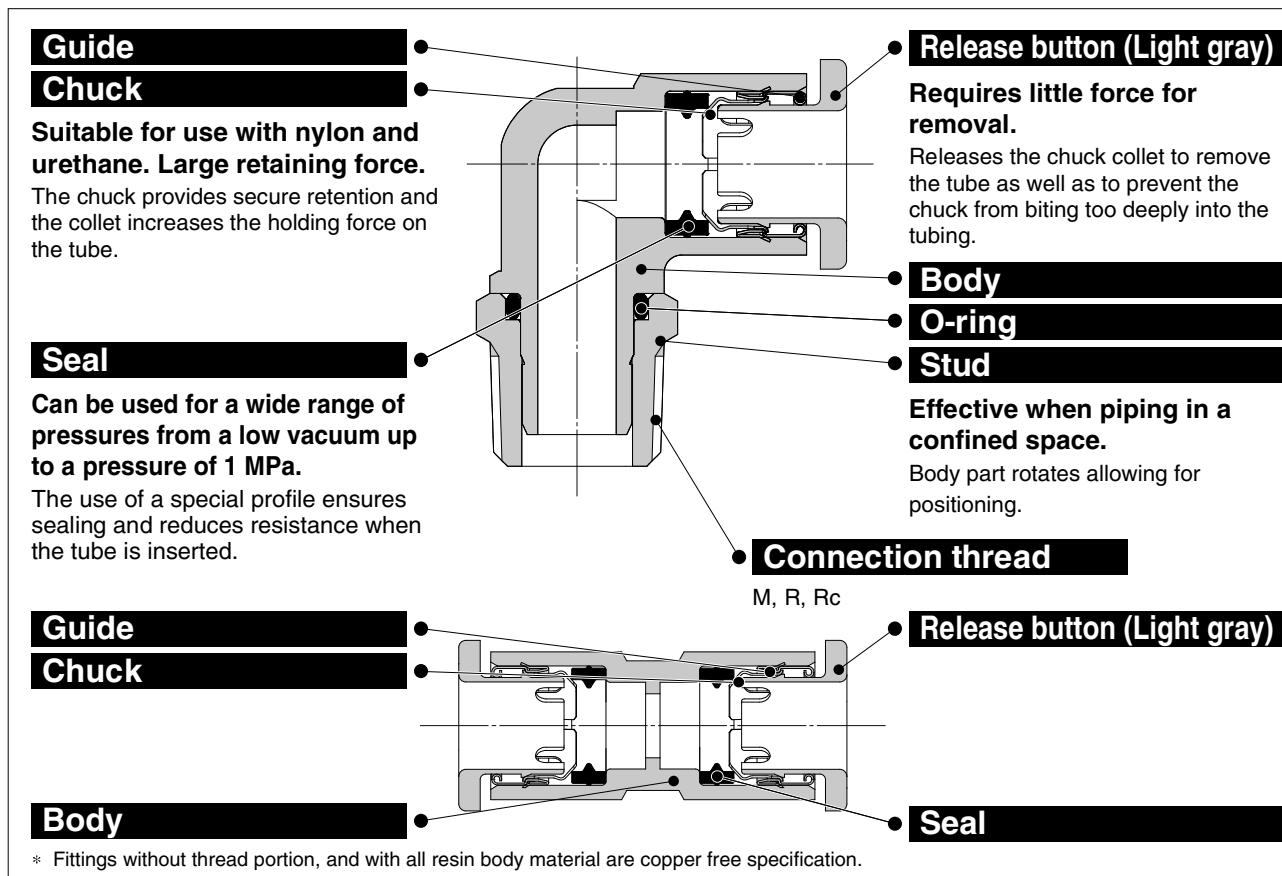

One-touch IN/OUT connection.
Possible to use in vacuum to -100 kPa.



Made to Order
(Refer to page 27 for details.)

Applicable Tubing

Tubing material	FEP, PFA, Nylon, Soft nylon, Polyurethane
Tubing O.D.	ø3.2, ø4, ø6

Specifications

Fluid	Air, Water ^{*1 *2}
Operating pressure range ^{*3}	-100 kPa to 1 MPa
Proof pressure (at 23°C)	3 MPa
Ambient and fluid temperature	-5 to 60°C, Water: 0 to 40°C (No freezing)
Thread	JIS B0203 (Taper thread for piping) JIS B0205 (Metric coarse thread)
Nut section	JIS B0205 (Metric fine thread)
Seal on the threads	With sealant

*1 The surge pressure must be under the maximum operating pressure.

*2 Deionized water is not recommended for use as it may affect the material used in the fittings. In addition, it is known to degrade the water quality.

*3 Do not use the fittings with a leak tester or for vacuum retention because they are not guaranteed for zero leakage.

Principal Parts Material

Body	C3604, PBT, PP, Stainless steel 303
Stud	C3604 (Thread portion), Stainless steel 303 (Thread portion)
Chuck	Stainless steel 304
Guide	Stainless steel 304
Release button	POM
Seal, O-ring	NBR
Gasket	Stainless steel 304, NBR

Metric Size One-touch Fittings KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

How to Order

Threaded Type

KQ2 H 06 - 01 A S 1

One-touch fittings

Model

Symbol	Model
H	Male connector
S	Hexagon socket head male connector
F	Female connector
L	Male elbow
K	45° male elbow
V	Universal male elbow
VS	Hexagon socket head universal male elbow
VF	Universal female elbow
LF	Female elbow
VD	Double universal male elbow
VT	Triple universal male elbow
W	Extended male elbow
T	Male branch tee
Y	Male run tee
D	Male delta union
E	Bulkhead union
	Bulkhead connector
LE	Bulkhead male elbow
N	Adapter

Oval type release button

Male thread seal method

Symbol	Seal method
Nil	None
S	With thread sealant

Thread material/Surface treatment

Symbol	Thread material/Surface treatment
A	Brass
N	Brass + Electroless nickel plating
G	Stainless steel 303 (Connection thread: Only male thread and M3)

Port size/Applicable tubing O.D.

Symbol	Size
Tubing connection 00 ^{*1}	Same dia. tubing
M3	M3 x 0.5
M5	M5 x 0.8
Thread connection M6	M6 x 1.0
01	R1/8, Rc1/8
02	R1/4, Rc1/4
03	R3/8, Rc3/8

*1 Only for "Bulkhead union" and "Bulkhead male elbow".

Applicable tubing O.D.

Symbol	Size
23	ø3.2
04	ø4
06	ø6

Spare Parts

Use the part number below to order the gasket for M3, M5, and M6 threads.

Gasket for M3 thread: M-3G2
Gasket for M5 thread: M-5G2
Gasket for M6 thread: M-6G

Tube - Tube Type

KQ2 H 06 - 00 A 1

One-touch fittings

Model

Symbol	Model
H	Straight union
	Different diameter straight
L	Union elbow
	Plug-in elbow
	Reducer elbow
W	Extended plug-in elbow
T	Union tee
	Different diameter tee
TW	Cross
TX	Different diameter cross
TY	Different diameter cross
D	Delta union
R	Plug-in reducer

Oval type release button

Port size/Applicable tubing O.D.

Symbol	Size
Tubing (Rod) connection 00	Same diameter tubing
99	Same diameter rod
Different dia. tubing Reducer 23	ø3.2
04	ø4
06	ø6
08	ø8

Applicable tubing O.D.

Symbol	Size
23	ø3.2
04	ø4
06	ø6

Accessories

Symbol	Name
KQ2N	Nipple
	Reducer nipple
KQ2C	Tube cap
KQ2P	Plug

Metric Size One-touch Fittings

Oval Type Variations

Hexagon socket head male connector

KQ2S P.10



Internal hexagon socket allows tightening with a hexagon wrench in confined spaces.




Universal male elbow

KQ2V P.13



Hexagon head of the body allows tightening with a box wrench in confined spaces.




45° male elbow

KQ2K P.13



Use to pipe a female thread at a 45° angle. Its direction is in-between that of the male connector and male elbow.




Extended male elbow

KQ2W P.17



Basically, it is used together with a male elbow. Its extended height allows for multi-leveled piping and prevents interference among fittings.




Bulkhead union

KQ2E P.24



Use to connect tubing through a panel, etc.




Bulkhead connector

KQ2E P.24



Use to connect a male thread and tubing through a panel, etc.



Nipple

KQ2N P.26



Use to connect One-touch fittings.




Reducer nipple

KQ2N P.26



Use to connect One-touch fittings of different sizes.



Universal female elbow

KQ2VF P.14



Use to branch a male or female thread in the same direction and at a 90° angle. Multiple connections possible.

Cross

KQ2TW P.20



Reducer elbow

KQ2L P.12



Use to change the tube direction of One-touch fittings by 90° and connect tubing of reduced size.

Male connector

KQ2H P.9



Use to pipe a female thread in the same direction. Most general model.

Cross

KQ2TW P.20



Use to four-branch a line.

Female connector

KQ2F P.10



Use to pipe a male thread of a pressure gauge, etc.

Male elbow

KQ2L P.11



Use to pipe a female thread at right angles. Most general model.

Different diameter cross

KQ2TX P.20



Use to four-branch a line and connect tubing of reduced size at both 90° angles.

Straight union

KQ2H P.9



Use to connect tubing in the same direction.

Union elbow

KQ2L P.11



Use to connect tubing at right angles.

Male branch tee

KQ2T P.18



Use to branch a female thread at both 90° angles.

Different diameter straight

KQ2H P.9



Use to connect tubing of different sizes.

Plug-in elbow

KQ2L P.12



Use to change the tube direction of One-touch fittings by 90°.

Union tee

KQ2T P.19



Use to branch tubing at both 90° angles.

Metric Size One-touch Fittings KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

		Oval Type	
		Metric Size M, R, Rc	
		Inch Size UNF, NPT	
		Sealant/Gasket Seal	
		Inch Size G	
		Metric Size G	
		Inch Size R	
		Metric Size R, Rc	
		Inch Size NPT	
		Face Seal	
Different diameter tee KQ2T	P.19	Use to connect tubing of reduced size for branching at both 90° angles.	
Different diameter tee KQ2T	P.19	Use to connect tubing of reduced size for branching at a 90° angle from two pipes running in the same direction.	
Different diameter cross KQ2TY	P.20	Use to connect tubing of reduced size for branching in three directions.	
Hexagon socket head universal male elbow KQ2VS	P.14	Hexagon socket on the top allows tightening with a hexagon wrench in confined spaces.	
Female elbow KQ2LF	P.16	Use to pipe a male thread at right angles.	
Double universal male elbow KQ2VD	P.15	Use to two-branch a female thread at right angles. Two individual parts rotate 360°.	
Triple universal male elbow KQ2VT	P.15	Use to three-branch a female thread at right angles. Three individual parts rotate 360°.	
Male run tee KQ2Y	P.21	Use to branch a female thread in the same direction and at a 90° angle.	
Extended plug-in elbow KQ2W	P.16	Use to change the tube direction of One-touch fittings by 90°. Multi-leveled piping is also possible with the plug-in elbow.	
Male delta union KQ2D	P.22	Use to branch a female thread at two right angles.	
Delta union KQ2D	P.23	Use to branch tubing at three right angles.	
Plug-in reducer KQ2R	P.23	Use to change size of One-touch fittings.	
Bulkhead male elbow KQ2LE	P.24	Use to connect tubing through a panel, etc. and to change the tube direction by 90°.	
Adapter KQ2N	P.25	Use to connect One-touch fittings and R female threads.	
Tube cap KQ2C	P.25	Use to plug unused tubing.	
Color cap KQ2C	P.26	Mount onto the release button and use different colors for piping according to applications.	
Plug KQ2P	P.25	Use to plug unused One-touch fittings.	

The following models do not support oval type release buttons. Refer to the round type (from page 101).

Branch universal female elbow KQ2ZF	P.115	Branch male elbow KQ2LU	P.110	Branch universal male elbow KQ2Z	P.115	Double branch universal male elbow KQ2ZD	P.116	Triple branch universal male elbow KQ2ZT	P.116
									
Branch union elbow KQ2LU	P.109	Double branch "Y" KQ2UD	P.126	Different diameter double union "Y" KQ2UD	P.126	Different diameter plug-in "Y" KQ2X	P.127	Double plug-in "Y" KQ2XD	P.127
									
Union "Y" KQ2U	P.125	Different diameter union "Y" KQ2U	P.125	Plug-in "Y" KQ2U	P.125	Branch "Y" KQ2U	P.124		
									

⚠ Box wrenches and socket wrenches may interfere with oval type release buttons. Refer to page 217 for details.

KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc



Dimensions

Male Connector: KQ2H (Gasket seal)



Applicable tubing O.D. [mm]	Connection thread M	Model	H (Width across flats)	ϕD	Release button dimensions		L	A	M	Effective area [mm²]		Min. port size	Weight [g]
					X	Y				Nylon	Urethane		
$\phi 3.2$	M3 x 0.5	KQ2H23-M3G1	7	6.9	6.7	9.5	17	14.4	13.3	0.9	0.9	1.2	2.4
	M5 x 0.8	KQ2H23-M5□1	7	6.9	6.7	9.5	17.3	14.3	13.3	3	2.5	2.5	2.7
$\phi 4$	M3 x 0.5	KQ2H04-M3G1	8	7.9	7.7	10	17.1	14.7	13.3	0.9	0.9	1.2	2.9
	M5 x 0.8	KQ2H04-M5□1	8	7.9	7.7	10	17.7	14.7	13.3	4	4	2.5	3.3
$\phi 6$	M5 x 0.8	KQ2H06-M5□1	10	9.9	9.7	12	17.7	14.7	13.3	4	4	2.5	4.1
	M6 x 1.0	KQ2H06-M6□1	10	9.9	9.7	12	18.8	14.8	13.3	5.6	5.6	3	4.4

□: A (Brass), N (Brass + Electroless nickel plating)

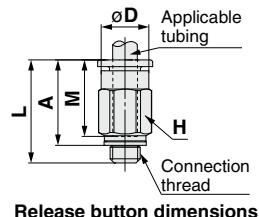



Male Connector: KQ2H (Sealant)



Applicable tubing O.D. [mm]	Connection thread R	Model	H (Width across flats)	ϕD	Release button dimensions		L	A ^{*1}	M	Effective area [mm²]		Min. port size	Weight [g]
					X	Y				Nylon	Urethane		
$\phi 3.2$	1/8	KQ2H23-01□S1	10	—	6.7	9.5	14	10.9	13.3	3.4	2.9	2.5	6
	1/4	KQ2H23-02□S1	14	—	6.7	9.5	16.7	12	13.3	3.4	2.9	2.5	15.3
$\phi 4$	1/8	KQ2H04-01□S1	10	—	7.7	10	14.3	11.2	13.3	4.8	3.4	3	5.6
	1/4	KQ2H04-02□S1	14	—	7.7	10	16.7	12	13.3	4.8	3.4	3	14.6
$\phi 6$	1/8	KQ2H06-01□S1	10	9.9	9.7	12	18.4	15.3	13.3	13.1	10.4	4.5	5.8
	1/4	KQ2H06-02□S1	14	—	9.7	12	16.7	12	13.3	13.1	10.4	4.5	12.5
	3/8	KQ2H06-03□S1	17	—	9.7	12	18.1	13	13.3	13.1	10.4	4.5	24.5

□: A (Brass), N (Brass + Electroless nickel plating)



*1 Reference dimensions after installation of R thread

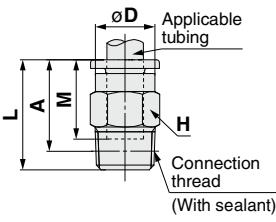

Straight Union: KQ2H





Applicable tubing O.D. [mm]	Model	ϕD	Release button dimensions		L	M	Effective area [mm²]		Min. port size	Weight [g]
			X	Y			Nylon	Urethane		
$\phi 3.2$	KQ2H23-00A1	7.1	6.7	9.5	27.6	13.3	3.4	2.9	2.5	1.4
$\phi 4$	KQ2H04-00A1	8.2	7.7	10	27.6	13.3	5.6	4	3	1.6
$\phi 6$	KQ2H06-00A1	10.4	9.7	12	27.6	13.3	13.1	10.4	4.5	2.1

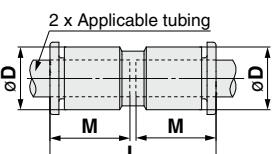

Different Diameter Straight: KQ2H



Applicable tubing O.D. [mm] ① ②	Model	ϕD_1	Release button dimensions ①		ϕD_2	Release button dimensions ②		L	M ₁	M ₂	Effective area [mm²]		Min. port size	Weight [g]
			ϕX (X)	Y		ϕX (X)	Y				Nylon	Urethane		
$\phi 2$ $\phi 3.2$	KQ2H02-23A1	5.8	5.5	—	7.1	6.7	9.5	26.2	11.9	13.3	—	0.9	1.4	1.1
$\phi 2$ $\phi 4$	KQ2H02-04A1	5.8	5.5	—	8.2	7.7	10	26.2	11.9	13.3	—	0.9	1.4	1.2
$\phi 3.2$ $\phi 4$	KQ2H23-04A1	7.1	6.7	9.5	8.2	7.7	10	27.6	13.3	13.3	3.4	2.9	2.5	1.5
$\phi 3.2$ $\phi 6$	KQ2H23-06A1	7.1	6.7	9.5	10.4	9.7	12	27.6	13.3	13.3	3.4	2.9	2.5	1.8
$\phi 4$ $\phi 6$	KQ2H04-06A1	8.2	7.7	10	10.4	9.7	12	27.6	13.3	13.3	5.6	5.6	3	2
$\phi 6$ $\phi 8$	KQ2H06-08A1	10.4	9.7	12	13.2	13	—	28.5	13.3	14.2	13.1	10.4	4.5	2.9

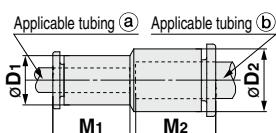

Applicable tubing O.D.:
 $\phi 3.2$, $\phi 4$, $\phi 6$

Metric Size One-touch Fittings KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc



Dimensions

Female Connector: KQ2F



Applicable tubing O.D. [mm]	Connection thread M, Rc	Model	H (Width across flats)	ϕD	Release button dimensions		L1	L2	M	Effective area [mm²]		Min. port size	Weight [g]
					X	Y				Nylon	Urethane		
$\phi 3.2$	M3 x 0.5	KQ2F23-M3□1	7	6.9	6.7	9.5	17.3	5.7	13.3	3	2.5	2.5	3.1
	M5 x 0.8	KQ2F23-M5□1	7	6.9	6.7	9.5	19.7	5.7	13.3	3	2.5	2.5	3.3
$\phi 4$	M3 x 0.5	KQ2F04-M3□1	8	7.9	7.7	10	16.5	5.7	13.3	4	4	2.5	4.1
	M5 x 0.8	KQ2F04-M5□1	8	7.9	7.7	10	19.6	5.7	13.3	4	4	3	4.5
	1/8	KQ2F04-01□1	14	7.9	7.7	10	24.1	8.5	13.3	5.6	4	3	12
$\phi 6$	1/4	KQ2F04-02□1	17	7.9	7.7	10	29	12.9	13.3	5.6	4	3	21.5
	M5 x 0.8	KQ2F06-M5□1	10	9.9	9.7	12	17.6	5.7	13.3	10	10	4.1	5.5
	1/8	KQ2F06-01□1	14	9.9	9.7	12	23.6	8.5	13.3	13.1	10.4	4.5	12.2
	1/4	KQ2F06-02□1	17	9.9	9.7	12	28.5	12.9	13.3	13.1	10.4	4.5	21.6
	3/8	KQ2F06-03□1	19	9.9	9.7	12	29.9	13.4	13.3	13.1	10.4	4.5	22.7

□: A (Brass), N (Brass + Electroless nickel plating)

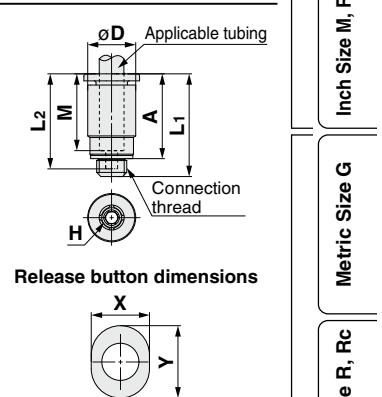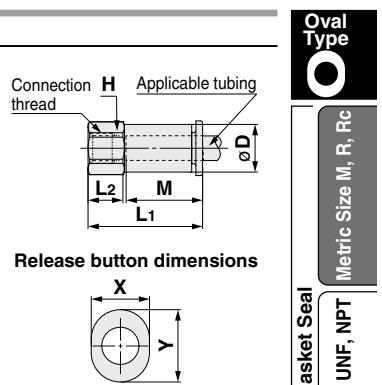


Hexagon Socket Head Male Connector: KQ2S (Gasket seal)



Applicable tubing O.D. [mm]	Connection thread M	Model	H (Width across flats)	ϕD	Release button dimensions		L1	L2	A	M	Effective area [mm²]		Min. port size	Weight [g]
					X	Y					Nylon	Urethane		
$\phi 3.2$	M3 x 0.5	KQ2S23-M3G1	1.5	7	6.7	9.5	17.1	16.1	14.5	13.3	1.4	1.4	1.5	2.2
	M5 x 0.8	KQ2S23-M5G1	2	7	6.7	9.5	17.5	16.3	14.5	13.3	2.5	2.5	2	2.6
$\phi 4$	M3 x 0.5	KQ2S04-M3G1	1.5	8	7.7	10	17.1	16.1	14.5	13.3	1.4	1.4	1.5	2.3
	M5 x 0.8	KQ2S04-M5G1	2.5	8	7.7	10	18.6	17.8	15.6	13.3	4	4	2.5	3
$\phi 6$	M6 x 1.0	KQ2S04-M6G1	3	8	7.7	10	18.5	17.8	14.5	13.3	4	4	3.1	4.1
	M5 x 0.8	KQ2S06-M5G1	2.5	10	9.7	12	19.5	17.8	16.5	13.3	4	4	2.5	3.5
	M6 x 1.0	KQ2S06-M6G1	3	10	9.7	12	19.1	18.1	15.1	13.3	4	4	3.1	5.1

□: A (Brass), N (Brass + Electroless nickel plating)

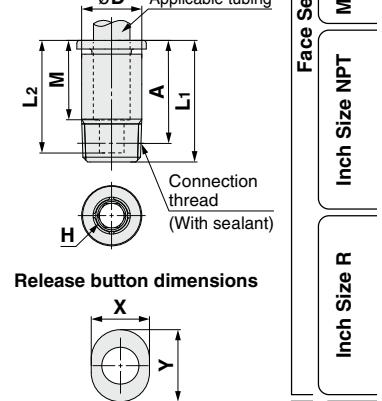


Hexagon Socket Head Male Connector: KQ2S (Sealant)



Applicable tubing O.D. [mm]	Connection thread R	Model	H (Width across flats)	ϕD	Release button dimensions		L1	L2	A *1	M	Effective area [mm²]		Min. port size	Weight [g]
					X	Y					Nylon	Urethane		
$\phi 4$	1/8	KQ2S04-01□S1	3	9.8	7.7	10	19.7	18.8	16.6	13.3	4.1	3.6	3.1	8.1
	1/8	KQ2S06-01□S1	4	10	9.7	12	20	18.8	16.9	13.3	10	9.9	4.1	6.5
$\phi 6$	1/4	KQ2S06-02□S1	4	13.8	9.7	12	19.8	18.8	15.1	13.3	10.7	10	4.1	13.4

□: A (Brass), N (Brass + Electroless nickel plating)

*1 Reference dimensions after installation of R thread

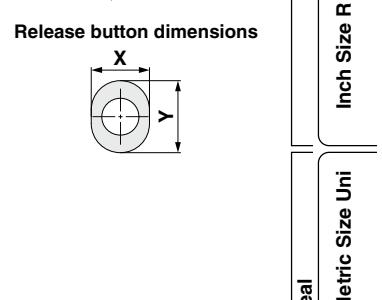

KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc



Dimensions

Male Elbow: KQ2L (Gasket seal)



Applicable tubing O.D. [mm]	Connection thread M	Model	H (Width across flats)	Release button dimensions		øD ₂	L ₁	L ₂	A	M	Effective area [mm ²]		Min. port size	Weight [g]	With a rib	
				X	Y						Nylon	Urethane				
ø3.2	M3 x 0.5	KQ2L23-M3G1	7	7.1	6.7	9.5	7	15.3	13.8	14.8	13.3	0.8	0.8	1.2	2.7	●
	M5 x 0.8	KQ2L23-M5□1	7	7.1	6.7	9.5	7	15.3	14.3	14.9	13.3	2.6	2.2	2.5	3.1	●
ø4	M3 x 0.5	KQ2L04-M3G1	7	8.2	7.7	10	7	15.4	14.3	15.8	13.3	0.8	0.8	1.2	2.7	●
	M5 x 0.8	KQ2L04-M5□1	7	8.2	7.7	10	7	15.4	14.8	15.9	13.3	3.5	3.5	2.5	3.1	●
ø6	M3 x 0.5	KQ2L06-M3G1	7	10.4	9.7	12	7	14.5	16.5	18.7	13.3	3.5	3.5	2.5	3.2	●
	M6 x 1.0	KQ2L06-M6□1	8	10.4	9.7	12	7	14.5	17.5	18.7	13.3	3.5	3.5	2.5	4.3	●

□: A (Brass), N (Brass + Electroless nickel plating)

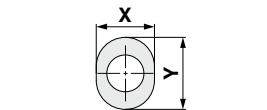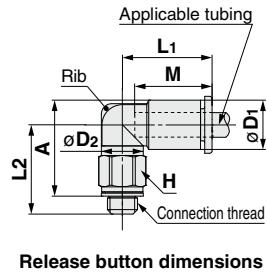



Male Elbow: KQ2L (Sealant)



Applicable tubing O.D. [mm]	Connection thread R	Model	H (Width across flats)	øD ₁	Release button dimensions		øD ₂	L ₁	L ₂	A ^{*1}	M	Effective area [mm ²]		Min. port size	Weight [g]	With a rib
					X	Y						Nylon	Urethane			
ø3.2	1/8	KQ2L23-01□S1	10	7.1	6.7	9.5	10	14.5	16.7	17.2	13.3	3	2.5	2.5	4.6	—
	1/4	KQ2L23-02□S1	14	7.1	6.7	9.5	10	14.5	21.2	20.1	13.3	3	2.5	2.5	14.1	—
ø4	1/8	KQ2L04-01□S1	10	8.2	7.7	10	10	14.8	16.2	17.2	13.3	4.6	3.3	3	4.8	●
	1/4	KQ2L04-02□S1	14	8.2	7.7	10	10	14.8	21.7	21.1	13.3	4.6	3.3	3	14.3	●
ø6	1/8	KQ2L06-01□S1	10	10.4	9.7	12	10	15.5	17.3	19.4	13.3	11.4	9	4.5	5.2	—
	1/4	KQ2L06-02□S1	14	10.4	9.7	12	10	15.5	22.8	23.3	13.3	11.4	9	4.5	14.7	—
	3/8	KQ2L06-03□S1	17	10.4	9.7	12	10	15.5	24.1	24.2	13.3	11.4	9	4.5	26.5	—

□: A (Brass), N (Brass + Electroless nickel plating)



*1 Reference dimensions after installation of R thread

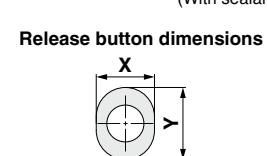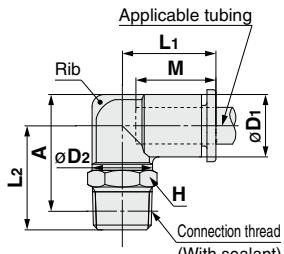

Union Elbow: KQ2L



Applicable tubing O.D. [mm]	Model	øD	Release button dimensions		L	Q	M	Mounting hole		Effective area [mm ²]	Min. port size	Weight [g]
			X	Y				øO	øN			
ø3.2	KQ2L23-00A1	7.1	6.7	9.5	14.9	5.4	13.3	6	3.2	7.1	3	2.5
ø4	KQ2L04-00A1	8.2	7.7	10	15.3	5.7	13.3	6	3.2	8.2	4.2	2.2
ø6	KQ2L06-00A1	10.4	9.7	12	16.3	6.8	13.3	6	3.2	10.4	11.4	9

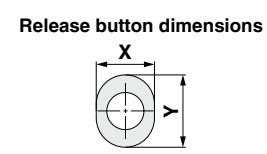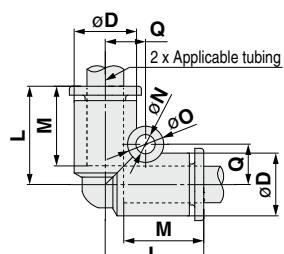

Metric Size One-touch Fittings **KQ2 Series**


Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

Dimensions

Plug-in Elbow: KQ2L




Applicable tubing O.D. [mm]	Applicable fitting size ϕd	Model	ϕD_1	Release button dimensions		ϕD_2	L_1	L_2	A	M	Effective area [mm ²] Nylon/Urethane	Min. port size	Weight [g]	
				X	Y									
ø3.2	ø3.2	KQ2L23-99A1	7.1	6.7	9.5	6.4	14.4	20.9	11.1	13.3	3	2.5	2.2	0.9
ø4	ø4	KQ2L04-99A1	8.2	7.7	10	7.2	14.5	21.1	11.9	13.3	4.2	4.2	2.5	1.2
ø6	ø6	KQ2L06-99A1	10.4	9.7	12	8	15.3	22.3	14.2	13.3	9	9	4	1.8

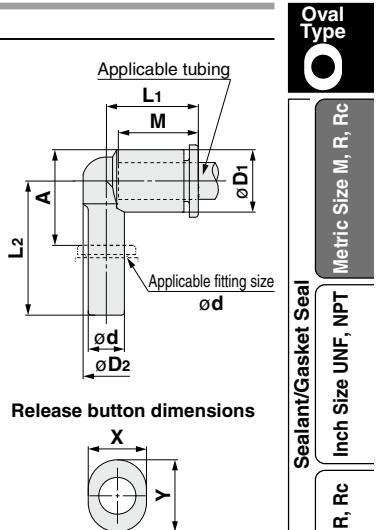

Reducer Elbow: KQ2L



Applicable tubing O.D. [mm]	Applicable fitting size ϕd	Model	ϕD_1	Release button dimensions		ϕD_2	L_1	L_2	A	M	Effective area [mm ²] Nylon/Urethane	Min. port size	Weight [g]	
				X	Y									
ø3.2	ø4	KQ2L23-04A1	7.1	6.7	9.5	6.4	14.5	23.9	14.1	13.3	3	2.5	2.5	1.1
	ø6	KQ2L23-06A1	7.1	6.7	9.5	6.4	14.5	24.1	14.3	13.3	3	2.5	2.5	1.3
ø4	ø6	KQ2L04-06A1	8.2	7.7	10	7.2	14.8	24.6	15.4	13.3	4.2	4.2	3	1.5
	ø8	KQ2L04-08A1	8.2	7.7	10	7.2	14.8	29.5	19.4	13.3	4.2	4.2	3	1.8
ø6	ø8	KQ2L06-08A1	10.4	9.7	12	9	15.5	24.2	15.2	13.3	11.4	9	4.5	2.1
	ø10	KQ2L06-10A1	10.4	9.7	12	9	15.5	31.6	21.2	13.3	11.4	9	4.5	2.7

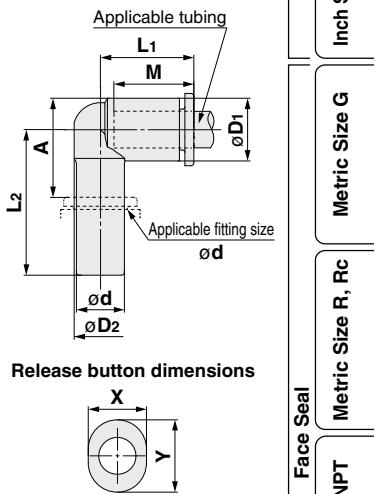

KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc


Dimensions

45° Male Elbow: KQ2K (Gasket seal)




Applicable tubing O.D. [mm]	Connection thread M	Model	H (Width across flats)	ϕD_1	Release button dimensions		ϕD_2	L1	L2	A	M	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]	
					X	Y									
$\phi 4$	M5 x 0.8	KQ2K04-M5□1	7	8.2	7.7	10	8	14.4	13.1	22.8	13.3	3.4	3.4	2.5	3
	M6 x 1.0	KQ2K04-M6□1	8	8.2	7.7	10	8	14.4	14.1	22.8	13.3	3.4	3.4	2.5	4.1
$\phi 6$	M5 x 0.8	KQ2K06-M5□1	7	10.4	9.7	12	8	14.4	17	27.4	13.3	3.4	3.4	2.5	3.5
	M6 x 1.0	KQ2K06-M6□1	8	10.4	9.7	12	8	14.4	18	27.4	13.3	3.4	3.4	2.5	4.5

□: A (Brass), N (Brass + Electroless nickel plating)



Release button dimensions




45° Male Elbow: KQ2K (Sealant)




Applicable tubing O.D. [mm]	Connection thread R	Model	H (Width across flats)	ϕD_1	Release button dimensions		ϕD_2	L1	L2	A ^{*1}	M	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]	
					X	Y									
$\phi 4$	1/8	KQ2K04-01□S1	10	8.2	7.7	10	10	14.4	12.7	22.3	13.3	4.8	3.4	3	4.6
	1/4	KQ2K04-02□S1	14	8.2	7.7	10	10	14.4	17.2	25.2	13.3	4.8	3.4	3	14.1
$\phi 6$	1/8	KQ2K06-01□S1	10	10.4	9.7	12	10	14.7	14.8	25.3	13.3	8.7	6.9	4.5	5
	1/4	KQ2K06-02□S1	14	10.4	9.7	12	10	14.7	19.3	28.2	13.3	8.7	6.9	4.5	14.5
	3/8	KQ2K06-03□S1	17	10.4	9.7	12	10	14.7	20.6	29.1	13.3	8.7	6.9	4.5	26.2

□: A (Brass), N (Brass + Electroless nickel plating)

*1 Reference dimensions after installation of R thread

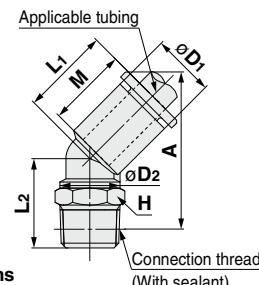

Release button dimensions




Universal Male Elbow: KQ2V (Gasket seal)



Applicable tubing O.D. [mm]	Connection thread M	Model	H (Width across flats)	ϕD_1	Release button dimensions		ϕD_2	L1	L2	L3	A	M	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]	
					X	Y										
$\phi 4$	M5 x 0.8	KQ2V04-M5□1	8	8.2	7.7	10	9.8	17.5	10.9	18.4	14.9	13.3	2.9	2.9	2.5	5.4
	M5 x 0.8	KQ2V06-M5□1	8	10.4	9.7	12	9.8	18.3	10.9	18.4	14.9	13.3	3.8	3.8	2.5	5.7

□: A (Brass), N (Brass + Electroless nickel plating)

Release button dimensions

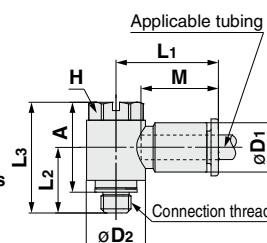



Universal Male Elbow: KQ2V (Sealant)



Applicable tubing O.D. [mm]	Connection thread R	Model	H (Width across flats)	ϕD_1	Release button dimensions		ϕD_2	L1	L2	L3	A ^{*1}	M	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]	
					X	Y										
$\phi 4$	1/8	KQ2V04-01□S1	8	8.2	7.7	10	13.4	19.3	13.7	25.6	22.5	13.3	2.9	2.9	3	13.2
	1/8	KQ2V06-01□S1	8	10.4	9.7	12	13.4	20.5	13.7	25.6	22.5	13.3	7.5	5.9	4.5	13.5
$\phi 6$	1/4	KQ2V06-02□S1	10	10.4	9.7	12	15.3	19.9	17.9	30.5	25.8	13.3	7.5	5.9	4.5	24.9

□: A (Brass), N (Brass + Electroless nickel plating)

*1 Reference dimensions after installation of R thread

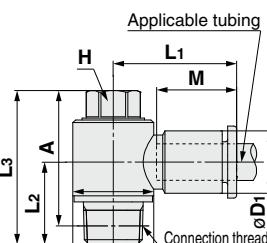

Release button dimensions

Metric Size One-touch Fittings KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc


Dimensions

Hexagon Socket Head Universal Male Elbow: KQ2VS (Gasket seal)



Applicable tubing O.D. [mm]	Connection thread M	Model	H (Width across flats)	ϕD_1	Release button dimensions X Y	ϕD_2	L1	L2	L3	A	M	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]	
ø4	M5 x 0.8	KQ2VS04-M5□1	4	8.2	7.7 10	9.8	17.5	10.4	18.2	15.2	13.3	2.9	2.9	2.5	5.3
ø6	M5 x 0.8	KQ2VS06-M5□1	4	10.4	9.7 12	9.8	18.3	10.4	18.2	15.2	13.3	3.8	3.8	2.5	5.6

□: A (Brass), N (Brass + Electroless nickel plating)

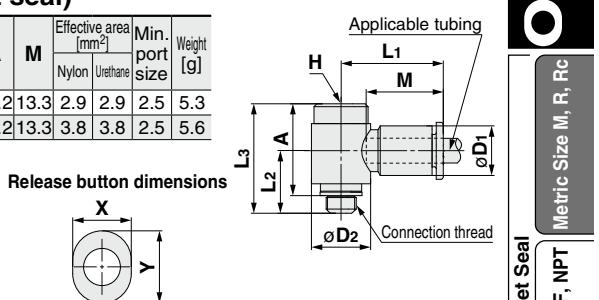

Oval Type

Metric Size M, R, Rc

Sealant/Gasket Seal

Inch Size M, R, Rc

Inch Size G

Hexagon Socket Head Universal Male Elbow: KQ2VS (Sealant)





Applicable tubing O.D. [mm]	Connection thread R	Model	H (Width across flats)	ϕD_1	Release button dimensions X Y	ϕD_2	L1	L2	L3	A *1	M	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]	
ø4	1/8	KQ2VS04-01□S1	6	8.2	7.7 10	13.4	19.3	13.7	25.8	22.7	13.3	2.9	2.9	3	13.2
ø6	1/8	KQ2VS06-01□S1	6	10.4	9.7 12	13.4	20.5	13.7	25.8	22.7	13.3	7.5	5.9	4.5	13.5
ø6	1/4	KQ2VS06-02□S1	6	10.4	9.7 12	15.3	19.9	17.9	26.5	21.8	13.3	7.5	5.9	4.5	20.8

□: A (Brass), N (Brass + Electroless nickel plating)

*1 Reference dimensions after installation of R thread

Release button dimensions

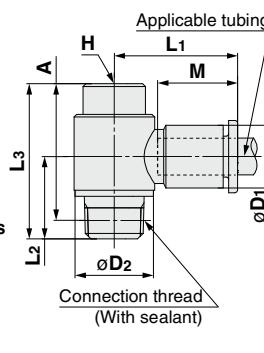

Metric Size G



Universal Female Elbow: KQ2VF (Gasket seal)



Applicable tubing O.D. [mm]	Connection thread M	Model	H (Width across flats)	ϕD_1	Release button dimensions X Y	ϕD_2	L1	L2	L3	A	M	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]	
ø4	M5 x 0.8	KQ2VF04-M5□1	8	8.2	7.7 10	9.8	17.5	10.2	19.2	16.2	13.3	2.9	2.9	2.5	5.5
ø6	M5 x 0.8	KQ2VF06-M5□1	8	10.4	9.7 12	9.8	18.3	10.2	19.2	16.2	13.3	3.8	3.8	2.5	5.8

□: A (Brass), N (Brass + Electroless nickel plating)

Release button dimensions

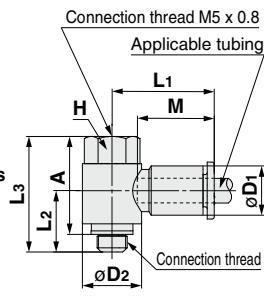

Metric Size G

Universal Female Elbow: KQ2VF (Sealant)





Applicable tubing O.D. [mm]	Connection thread Rc, R	Model	H (Width across flats)	ϕD_1	Release button dimensions X Y	ϕD_2	L1	L2	L3	A *1	M	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]	
ø4	1/8	KQ2VF04-01□S1	14	8.2	7.7 10	13.4	19.3	14.4	28.5	25.4	13.3	2.9	2.9	3	17.3
ø6	1/8	KQ2VF06-01□S1	14	10.4	9.7 12	13.4	20.5	14.4	28.5	25.4	13.3	7.5	5.9	4.5	17.6
ø6	1/4	KQ2VF06-02□S1	17	10.4	9.7 12	17.6	21.2	19.4	37.9	33.2	13.3	7.5	5.9	4.5	37

□: A (Brass), N (Brass + Electroless nickel plating)

*1 Reference dimensions after installation of R thread

Release button dimensions

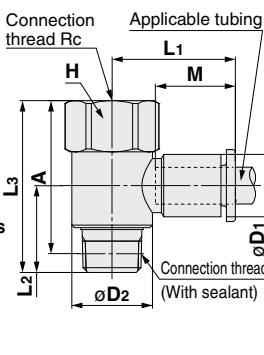

Gasket Seal

Inch Size Uni

Inch Size R

Inch Size NPT

Face Seal

KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

Dimensions


Triple Universal Male Elbow: KQ2VT (Sealant)




Applicable tubing O.D. [mm]	Connection thread R	Model	H (Width across flats)	Release button dimensions				A *1	M	P	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]				
				øD1	X	øD2	L1										
ø4	1/8	KQ2VT04-01□S1	14	8.2	7.7	10	13.4	19.3	16.3	52.5	49.4	13.3	13.4	2.9	2.9	3	25.3
	1/4	KQ2VT04-02□S1	14	8.2	7.7	10	13.4	19.3	20.7	56.9	52.2	13.3	13.4	2.9	2.9	3	32.9
	3/8	KQ2VT04-03□S1	17	8.2	7.7	10	13.4	19.3	22.1	58.3	53.2	13.3	13.4	2.9	2.9	3	44.8
ø6	1/8	KQ2VT06-01□S1	14	10.4	9.7	12	13.4	20.5	16.3	52.5	49.4	13.3	13.4	7.5	5.9	4.5	26.2
	1/4	KQ2VT06-02□S1	14	10.4	9.7	12	13.4	20.5	20.7	56.9	52.2	13.3	13.4	7.5	5.9	4.5	33.9
	3/8	KQ2VT06-03□S1	17	10.4	9.7	12	13.4	20.5	22.1	58.3	53.2	13.3	13.4	7.5	5.9	4.5	45.8

□: A (Brass), N (Brass + Electroless nickel plating)

*1 Reference dimensions after installation of R thread

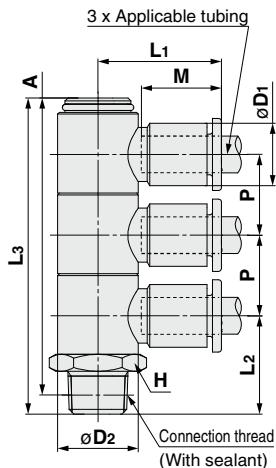

Release button dimensions




Double Universal Male Elbow: KQ2VD (Sealant)




Applicable tubing O.D. [mm]	Connection thread R	Model	H (Width across flats)	Release button dimensions				A *1	M	P	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]				
				øD1	X	øD2	L1										
ø4	1/8	KQ2VD04-01□S1	14	8.2	7.7	10	13.4	19.3	16.3	39	35.9	13.3	13.4	2.9	2.9	3	19.7
	1/4	KQ2VD04-02□S1	14	8.2	7.7	10	13.4	19.3	20.7	43.4	38.7	13.3	13.4	2.9	2.9	3	27.4
	3/8	KQ2VD04-03□S1	17	8.2	7.7	10	13.4	19.3	22.1	44.8	39.7	13.3	13.4	2.9	2.9	3	39.3
ø6	1/8	KQ2VD06-01□S1	14	10.4	9.7	12	13.4	20.5	16.3	39	35.9	13.3	13.4	7.5	5.9	4.5	20.3
	1/4	KQ2VD06-02□S1	14	10.4	9.7	12	13.4	20.5	20.7	43.4	38.7	13.3	13.4	7.5	5.9	4.5	28
	3/8	KQ2VD06-03□S1	17	10.4	9.7	12	13.4	20.5	22.1	44.8	39.7	13.3	13.4	7.5	5.9	4.5	39.9

□: A (Brass), N (Brass + Electroless nickel plating)

*1 Reference dimensions after installation of R thread

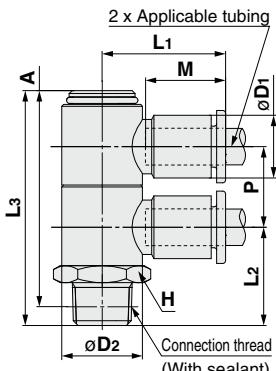

Release button dimensions



Metric Size One-touch Fittings KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc


Dimensions

Female Elbow: KQ2LF




Applicable tubing O.D. [mm]	Connection thread M, Rc	Model	H (Width across flats)	Release button dimensions		oD ₂	L ₁	L ₂	M	Effective area [mm ²]		Min. port size	Weight [g]	With a rib	
				X	Y					Nylon	Urethane				
ø4	M5 x 0.8	KQ2LF04-M5□1	8	8.2	7.7	10	7	15.4	15.3	13.3	3.5	3.5	2.5	4.7	●
	M6 x 1.0	KQ2LF04-M6□1	8	8.2	7.7	10	7	15.4	16.1	13.3	3.5	3.5	2.5	4.6	●
	1/8	KQ2LF04-01□1	14	8.2	7.7	10	10	14.8	22.4	13.3	4.2	4.2	3	17.6	—
	1/4	KQ2LF04-02□1	17	8.2	7.7	10	10	14.8	26.9	13.3	4.2	4.2	3	29.6	—
ø6	M5 x 0.8	KQ2LF06-M5□1	8	10.4	9.7	12	7	14.5	17	13.3	3.5	3.5	2.5	4.8	●
	M6 x 1.0	KQ2LF06-M6□1	8	10.4	9.7	12	7	14.5	17.8	13.3	3.5	3.5	2.5	4.7	●
	1/8	KQ2LF06-01□1	14	10.4	9.7	12	10	15.5	23.5	13.3	11.4	9	4.5	18	—
	1/4	KQ2LF06-02□1	17	10.4	9.7	12	10	15.5	28	13.3	11.4	9	4.5	30.1	—
	3/8	KQ2LF06-03□1	19	10.4	9.7	12	10	15.5	28.5	13.3	11.4	9	4.5	34	—

□: A (Brass), N (Brass + Electroless nickel plating)

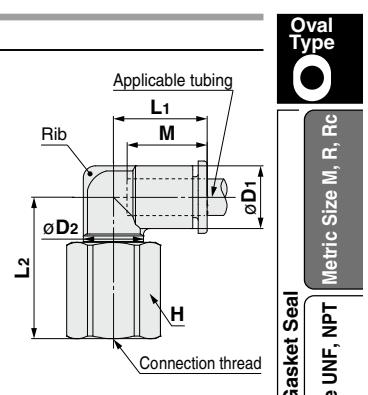

Release button dimensions



Oval Type

Metric Size M, R, Rc

Sealant/Gasket Seal

Inch Size M, R, Rc

Metric Size G

Face Seal

Inch Size NPT

Inch Size R

Inch Size Uni


Gasket Seal

Inch Size Uni


Extended Plug-in Elbow: KQ2W



Applicable tubing O.D. [mm]	Applicable fitting size ød	Model	øD ₁	Release button dimensions		øD ₂	L ₁	L ₂	A	M	Effective area [mm ²]		Min. port size	Weight [g]
				X	Y						Nylon	Urethane		
ø3.2	ø3.2	KQ2W23-99A1	7.1	6.7	9.5	6.4	14.4	30.5	20.8	13.3	3	2.5	2.5	1
ø4	ø4	KQ2W04-99A1	8.2	7.7	10	7.2	14.5	31.8	22.6	13.3	4.2	4.2	3	1.3
ø6	ø6	KQ2W06-99A1	10.4	9.7	12	8	15.3	35.2	27.1	13.3	9	9	4	2

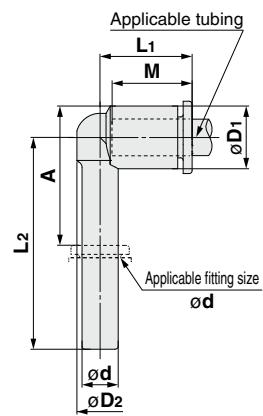

Release button dimensions



Inch Size G

Metric Size R, Rc

Inch Size Uni

Metric Size M, R, Rc

Gasket Seal

Inch Size Uni

KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc


Dimensions

Extended Male Elbow: KQ2W (Gasket seal)




Applicable tubing O.D. [mm]	Connection thread M	Model	H (Width across flats)	Release button dimensions	ϕD_1	ϕD_2	L1	L2	A	M	Effective area [mm²]	Min. port size	Weight [g]	With a rib
$\phi 3.2$	M3 x 0.5	KQ2W23-M3G1	7	7.1 6.7 9.5	7	15.3	22.5	23.4	13.3	0.8	0.8	1.2	4.8	●
	M5 x 0.8	KQ2W23-M5□1	7	7.1 6.7 9.5	7	15.3	25.2	25.7	13.3	2.8	2.4	2.5	5.8	●
$\phi 4$	M3 x 0.5	KQ2W04-M3G1	7	8.2 7.7 10	7	15.4	23	24.5	13.3	0.8	0.8	1.2	4.9	●
	M5 x 0.8	KQ2W04-M5□1	7	8.2 7.7 10	7	15.4	25.7	26.8	13.3	3	3	2.5	5.8	●
$\phi 6$	M5 x 0.8	KQ2W06-M5□1	7	10.4 9.7 12	7	14.5	27.4	29.6	13.3	3	3	2.5	5.9	●

□: A (Brass), N (Brass + Electroless nickel plating)

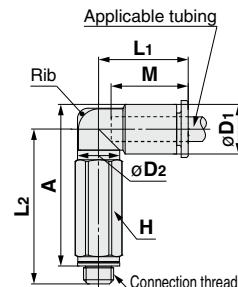

Release button dimensions




Extended Male Elbow: KQ2W (Sealant)




Applicable tubing O.D. [mm]	Connection thread R	Model	H (Width across flats)	Release button dimensions	ϕD_1	ϕD_2	L1	L2	A ^{*1}	M	Effective area [mm²]	Min. port size	Weight [g]	With a rib
$\phi 3.2$	1/8	KQ2W23-01□S1	10	7.1 6.7 9.5	10	14.5	30.3	30.8	13.3	2.8	2.4	2.5	10.8	—
	1/4	KQ2W23-02□S1	14	7.1 6.7 9.5	10	14.5	32.8	31.7	13.3	2.8	2.4	2.5	27.3	—
$\phi 4$	1/8	KQ2W04-01□S1	10	8.2 7.7 10	10	14.8	29.9	30.9	13.3	4	4	3	11	●
	1/4	KQ2W04-02□S1	14	8.2 7.7 10	10	14.8	33.3	32.7	13.3	4	4	3	27.5	●
$\phi 6$	1/8	KQ2W06-01□S1	10	10.4 9.7 12	10	15.5	31	33.1	13.3	10.9	8.6	4.5	11.4	—
	1/4	KQ2W06-02□S1	14	10.4 9.7 12	10	15.5	34.4	34.9	13.3	10.9	8.6	4.5	28	—
	3/8	KQ2W06-03□S1	17	10.4 9.7 12	10	15.5	35.7	35.8	13.3	10.9	8.6	4.5	47.4	—

□: A (Brass), N (Brass + Electroless nickel plating)

*1 Reference dimensions after installation of R thread

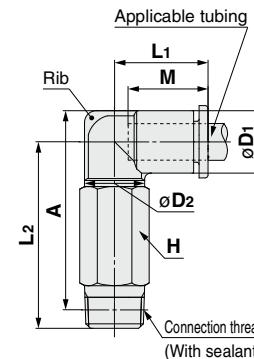

Release button dimensions



Metric Size One-touch Fittings **KQ2 Series**

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc


Dimensions

Male Branch Tee: KQ2T (Gasket seal)




Applicable tubing O.D. [mm]	Connection thread	Model	H (Width across flats)	Release button dimensions		oD2	L1	L2	A	M	Effective area [mm²]	Min. port size	Weight [g]		
				oD1	X										
$\varnothing 3.2$	M3 x 0.5	KQ2T23-M3G1	7	7.1	6.7	9.5	7	15.3	13.8	14.7	13.3	0.9	0.9	1.2	3.1
	M5 x 0.8	KQ2T23-M5□1	7	7.1	6.7	9.5	7	15.3	14.3	14.8	13.3	3.2	2.7	2.5	3.5
$\varnothing 4$	M3 x 0.5	KQ2T04-M3G1	7	8.2	7.7	10	7	15.4	14.3	15.8	13.3	0.9	0.9	1.2	3.4
	M5 x 0.8	KQ2T04-M5□1	7	8.2	7.7	10	7	15.4	14.8	15.9	13.3	4.5	4.5	2.5	3.9
$\varnothing 6$	M6 x 1.0	KQ2T06-M6□1	8	8.2	7.7	10	7	15.4	15.8	15.9	13.3	4.5	4.5	2.5	4.9
	M6 x 1.0	KQ2T06-M6□1	8	10.4	9.7	12	7	14.5	16.5	18.7	13.3	4.5	4.5	2.5	4.4

□: A (Brass), N (Brass + Electroless nickel plating)

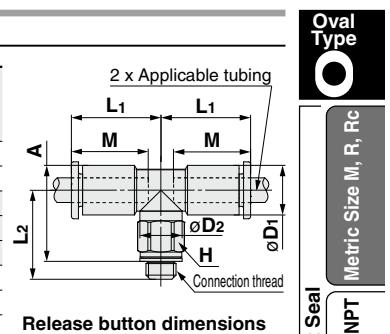

Release button dimensions



Metric Size M, R, Rc
Inch Size UNF, NPT

Sealant/Gasket Seal
Inch Size G

Inch Size M, R, Rc
Metric Size G

Metric Size R, Rc
Inch Size R

Inch Size NPT
Face Seal

Metric Size R, Rc
Inch Size R

Inch Size Uni
Gasket Seal

Male Branch Tee: KQ2T (Sealant)




Applicable tubing O.D. [mm]	Connection thread	Model	H (Width across flats)	Release button dimensions		oD2	L1	L2	A*1	M	Effective area [mm²]	Min. port size	Weight [g]		
				oD1	X										
$\varnothing 3.2$	1/8	KQ2T23-01□S1	10	7.1	6.7	9.5	10	14.5	16.6	17.1	13.3	3.4	2.9	2.5	5.2
	1/4	KQ2T23-02□S1	14	7.1	6.7	9.5	10	14.5	21.1	20	13.3	3.4	2.9	2.5	14.7
$\varnothing 4$	1/8	KQ2T04-01□S1	10	8.2	7.7	10	10	14.8	16.2	17.2	13.3	6	4.1	3	5.5
	1/4	KQ2T04-02□S1	14	8.2	7.7	10	10	14.8	21.7	21.1	13.3	6	4.1	3	15
$\varnothing 6$	1/8	KQ2T06-01□S1	10	10.4	9.7	12	10	15.5	17.3	19.4	13.3	13.9	11	4.5	6.1
	1/4	KQ2T06-02□S1	14	10.4	9.7	12	10	15.5	22.8	23.3	13.3	13.9	11	4.5	15.6
	3/8	KQ2T06-03□S1	17	10.4	9.7	12	10	15.5	24.1	24.2	13.3	13.9	11	4.5	27.4

□: A (Brass), N (Brass + Electroless nickel plating)

*1 Reference dimensions after installation of R thread

Release button dimensions



Inch Size G

Metric Size G

Inch Size R

Metric Size Uni

KQ2 Series


Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

Dimensions


Union Tee: KQ2T



Applicable tubing O.D. [mm]	Model	ϕD	Release button dimensions		L_1	L_2	M	Q	Mounting hole ϕO	Mounting hole ϕN	Effective area [mm²]	Min. port size	Weight [g]	
			X	Y										
$\phi 3.2$	KQ2T23-00A1	7.1	6.7	9.5	14.9	18.5	13.3	5.4	6	3.2	7.1	3.4	2.9	2.3
$\phi 4$	KQ2T04-00A1	8.2	7.7	10	15.3	19.4	13.3	5.7	6	3.2	8.2	6.4	4.4	3
$\phi 6$	KQ2T06-00A1	10.4	9.7	12	16.3	21.5	13.3	6.8	6	3.2	10.4	13.4	10.6	4.5

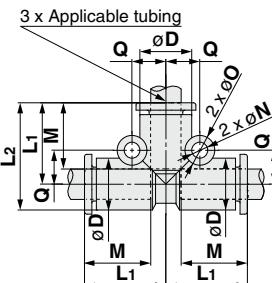


Release button dimensions




Different Diameter Tee: KQ2T



Applicable tubing O.D. [mm] (a) (b)	Model	ϕD_1	Release button dimensions (a)		ϕD_2	Release button dimensions (b)		L_1	L_2	L_3	M_1	M_2	Q_1	Q_2	Mounting hole ϕO	Mounting hole ϕN	Effective area [mm²]	Min. port size	Weight [g]	
			ϕX (X)	Y		ϕX (X)	Y													
$\phi 3.2$ $\phi 4$	KQ2T23-04A1	8.2	6.7	9.5	7.1	7.7	10	14.9	15.3	18.5	13.3	13.3	5.4	5.8	6	3.2	8.2	3.8	3.5	2.6
$\phi 4$ $\phi 6$	KQ2T04-06A1	10.4	7.7	10	8.2	9.7	12	15.3	16.3	19.4	13.3	13.3	5.7	6.8	6	3.2	10.4	7.1	6.6	3
$\phi 6$ $\phi 8$	KQ2T06-08A1	13.2	9.7	12	10.4	13	—	17.2	17.3	22.4	14.2	13.3	7.3	8.4	8	4.2	13.2	16.4	16.4	5.3

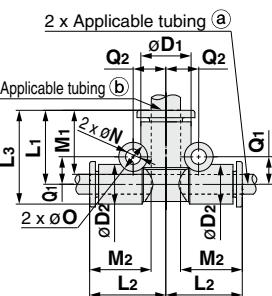

Release button dimensions




Applicable tubing O.D.:
 $\phi 3.2$, $\phi 4$, $\phi 6$


Different Diameter Tee: KQ2T



Applicable tubing O.D. [mm] (a) (b)	Model	ϕD_1	Release button dimensions (a)		ϕD_2	Release button dimensions (b)		L_1	L_2	L_3	M_1	M_2	Q_1	Q_2	Mounting hole ϕO	Mounting hole ϕN	Effective area [mm²]	Min. port size	Weight [g]	
			ϕX (X)	Y		ϕX (X)	Y													
$\phi 6$ $\phi 4$	KQ2T06-04A1	8.2	9.7	12	10.4	7.7	10	16.3	15.3	21.5	13.3	13.3	6.8	5.7	6	3.2	10.4	6.4	4.4	3
$\phi 8$ $\phi 6$	KQ2T08-06A1	10.4	13	—	13.2	9.7	12	17.3	17.2	23.9	13.3	14.2	8.4	7.3	8	4.2	13.2	13.4	10.6	4.5

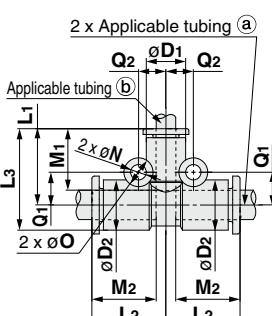

Release button dimensions



Applicable tubing O.D.:
 $\phi 4$, $\phi 6$

Metric Size One-touch Fittings KQ2 Series


Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

Dimensions

Cross: KQ2TW



Applicable tubing O.D. [mm]	Model	ϕD	Release button dimensions		L	Q	M	Mounting hole			Effective area [mm²]		Min. port size	Weight [g]
			X	Y				ϕO	ϕN	Thickness	Nylon	Urethane		
$\phi 4$	KQ2TW04-00A1	8.2	7.7	10	15.3	5.7	13.3	6	3.2	8.2	6.4	4.4	3	3.5
$\phi 6$	KQ2TW06-00A1	10.4	9.7	12	16.3	6.8	13.3	6	3.2	10.4	13.4	10.6	4.5	4.9

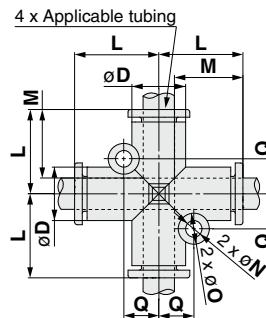

Release button dimensions



Oval Type


Oval Type
Metric Size M, R, Rc

Sealant/Gasket Seal
Inch Size UNF, NPT


Different Diameter Cross: KQ2TX



Applicable tubing O.D. [mm]	Model	ϕD_1	Release button dimensions (a)		ϕD_2	Release button dimensions (b)		L ₁	L ₂	Q	M ₁	M ₂	Mounting hole			Effective area [mm²]	Min. port size	Weight [g]	
			X	Y		ϕX	Y						ϕO	ϕN	Thickness	Nylon	Urethane		
$\phi 6$ $\phi 8$	KQ2TX06-08A1	10.4	9.7	12	13.2	13	—	17.2	17.3	8.4	13.3	14.2	8	4.2	13.2	13.4	10.6	4.5	7.1

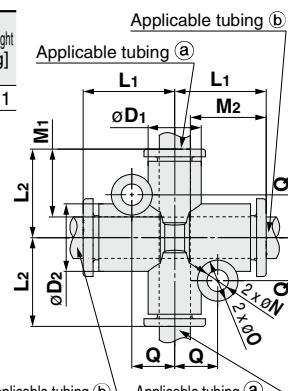

Release button dimensions




Applicable tubing (a)
Inch Size M, R, Rc
Metric Size G
Inch Size NPT
Face Seal


Different Diameter Cross: KQ2TY



Applicable tubing O.D. [mm]	Model	ϕD_1	Release button dimensions (a)		ϕD_2	Release button dimensions (b)		L ₁	L ₂	Q	M ₁	M ₂	Mounting hole			Effective area [mm²]	Min. port size	Weight [g]	
			X	Y		ϕX	Y						ϕO	ϕN	Thickness	Nylon	Urethane		
$\phi 6$ $\phi 8$	KQ2TY06-08A1	10.4	9.7	12	13.2	13	—	17.3	17.2	8.4	13.3	14.2	8	4.2	13.2	13.4	10.6	4.5	6.5

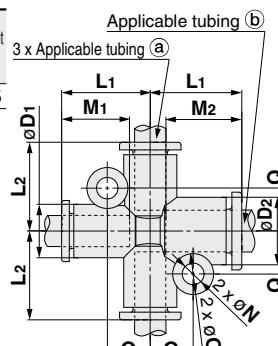

Release button dimensions



Applicable tubing (a)
Inch Size R
Metric Size Uni
Inch Size Unit
Gasket Seal
Inch Size NPT
Face Seal

Applicable tubing O.D.: $\phi 6$

KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc


Dimensions

Male Run Tee: KQ2Y (Gasket seal)



Applicable tubing O.D. [mm]	Connection thread	Model	H (Width across flats)	Release button dimensions		øD2	L1	L2	L3	A	M	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]		
				øD1	X											
ø3.2	M3 x 0.5	KQ2Y23-M3G1	7	7.1	6.7	9.5	7	15.3	13.8	15.3	26.5	13.3	0.9	0.9	1.2	3.1
	M5 x 0.8	KQ2Y23-M5G1	7	7.1	6.7	9.5	7	15.3	14.3	15.3	26.6	13.3	3.2	2.7	2.5	3.5
ø4	M3 x 0.5	KQ2Y04-M3G1	7	8.2	7.7	10	7	15.4	14.3	15.4	27.1	13.3	0.9	0.9	1.2	3.4
	M5 x 0.8	KQ2Y04-M5G1	7	8.2	7.7	10	7	15.4	14.8	15.4	27.2	13.3	4.5	4.5	2.5	3.9
	M6 x 1.0	KQ2Y04-M6G1	8	8.2	7.7	10	7	15.4	15.8	15.4	27.2	13.3	4.5	4.5	2.5	4.9
ø6	M5 x 0.8	KQ2Y06-M5G1	7	10.4	9.7	12	7	16.3	16.5	16.3	29.8	13.3	4.5	4.5	2.5	4.6
	M6 x 1.0	KQ2Y06-M6G1	8	10.4	9.7	12	7	16.3	17.5	16.3	29.8	13.3	4.5	4.5	2.5	5.7

□: A (Brass), N (Brass + Electroless nickel plating)

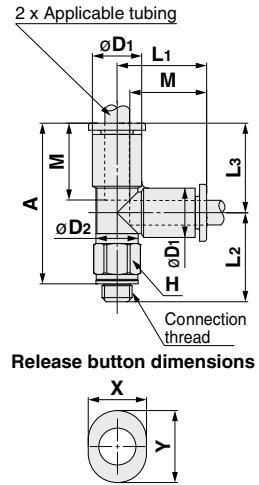



Male Run Tee: KQ2Y (Sealant)



Applicable tubing O.D. [mm]	Connection thread	Model	H (Width across flats)	Release button dimensions		øD2	L1	L2	L3	A *1	M	Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]		
				øD1	X											
ø3.2	1/8	KQ2Y23-01S1	10	7.1	6.7	9.5	10	14.9	16.6	14.9	28.5	13.3	3.4	2.9	2.5	5.3
	1/4	KQ2Y23-02S1	14	7.1	6.7	9.5	10	14.9	21.1	14.9	31.4	13.3	3.4	2.9	2.5	14.7
ø4	1/8	KQ2Y04-01S1	10	8.2	7.7	10	10	15.3	16.2	15.3	28.4	13.3	6.4	4.4	3	5.6
	1/4	KQ2Y04-02S1	14	8.2	7.7	10	10	15.3	21.7	15.3	32.3	13.3	6.4	4.4	3	15
	1/8	KQ2Y06-01S1	10	10.4	9.7	12	10	16.3	17.3	16.3	30.5	13.3	13.4	10.6	4.5	6.2
ø6	1/4	KQ2Y06-02S1	14	10.4	9.7	12	10	16.3	22.8	16.3	34.4	13.3	13.4	10.6	4.5	15.8
	3/8	KQ2Y06-03S1	17	10.4	9.7	12	10	16.3	24.1	16.3	35.3	13.3	13.4	10.6	4.5	27.5

□: A (Brass), N (Brass + Electroless nickel plating)

*1 Reference dimensions after installation of R thread

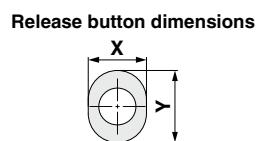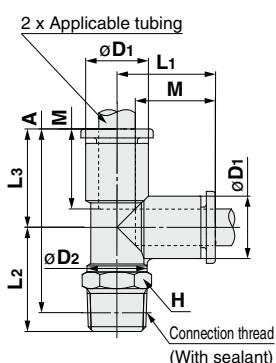

Metric Size One-touch Fittings KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc


Dimensions

Male Delta Union: KQ2D (Gasket seal)



Applicable tubing O.D. [mm]	Connection thread M	Model	H (Width across flats)	ϕD	Release button dimensions			L1	L2	A	M	Q	Mounting hole ϕO	Mounting hole ϕN	Effective area [mm²]	Min. port size	Weight [g]	
					X	Y	L1											
$\phi 4$	M5 x 0.8	KQ2D04-M5□1	10	8.2	7.7	10	15.8	20.7	21.8	13.3	5.7	6	3.2	8.2	2.2	2.2	1.8	6.6
	M6 x 1.0	KQ2D04-M6□1	10	8.2	7.7	10	15.8	21.7	21.8	13.3	5.7	6	3.2	8.2	4.3	4.3	3	6.4
$\phi 6$	M5 x 0.8	KQ2D06-M5□1	12	10.4	9.7	12	16.8	21.7	23.9	13.3	6.7	6	3.2	10.4	4.3	4.3	1.8	9.8
	M6 x 1.0	KQ2D06-M6□1	12	10.4	9.7	12	16.8	22.7	23.9	13.3	6.7	6	3.2	10.4	4.3	4.3	3	9.7

□: A (Brass), N (Brass + Electroless nickel plating)

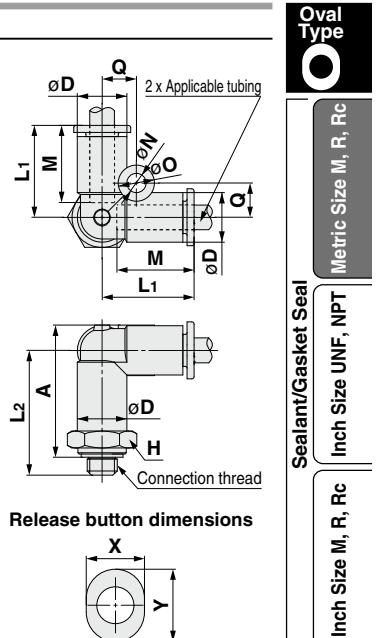


Male Delta Union: KQ2D (Sealant)



Applicable tubing O.D. [mm]	Connection thread R	Model	H (Width across flats)	ϕD	Release button dimensions			L1	L2	A ^{*1}	M	Q	Mounting hole ϕO	Mounting hole ϕN	Effective area [mm²]	Min. port size	Weight [g]	
					X	Y	L1											
$\phi 4$	1/8	KQ2D04-01□S1	10	8.2	7.7	10	15.8	23.3	24.3	13.3	5.7	6	3.2	8.2	6	6	3.6	9.2
	1/4	KQ2D04-02□S1	14	8.2	7.7	10	15.8	27.1	27.1	13.3	5.7	6	3.2	8.2	6	6	3.6	19
$\phi 6$	1/8	KQ2D06-01□S1	12	10.4	9.7	12	16.8	24.3	26.4	13.3	6.7	6	3.2	10.4	13.9	11	5.4	10.2
	1/4	KQ2D06-02□S1	14	10.4	9.7	12	16.8	28.7	29.2	13.3	6.7	6	3.2	10.4	13.9	11	5.4	19.1
	3/8	KQ2D06-03□S1	17	10.4	9.7	12	16.8	30.1	30.2	13.3	6.7	6	3.2	10.4	13.9	11	5.4	31

□: A (Brass), N (Brass + Electroless nickel plating)

*1 Reference dimensions after installation of R thread

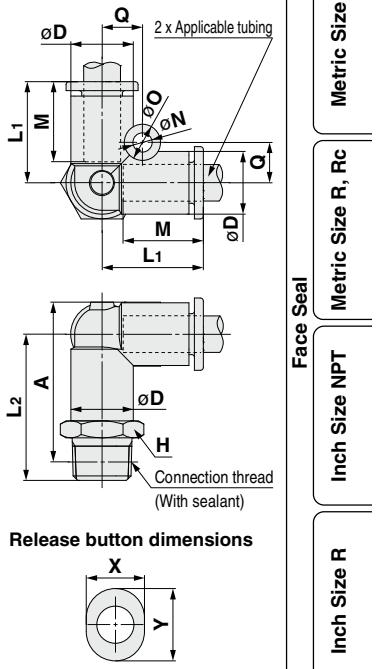

KQ2 Series



Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

Dimensions


Delta Union: KQ2D



Applicable tubing O.D. [mm]	Model	ϕD	Release button dimensions			L	M	Q	Mounting hole			Effective area [mm²] Nylon Urethane	Min. port size	Weight [g]
			X	Y	ϕO	ϕN	Thickness							
$\phi 4$	KQ2D04-00A1	8.2	7.7	10	15.8	13.3	5.7	6	3.2	8.2	6	4.1	3	2.7
$\phi 6$	KQ2D06-00A1	10.4	9.7	12	16.8	13.3	6.7	6	3.2	10.4	13.9	11	4.5	3.8

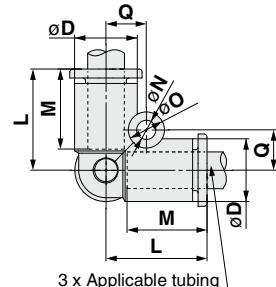



Release button dimensions



Plug-in Reducer: KQ2R



Applicable tubing O.D. [mm]	Applicable fitting size ϕd	Model	ϕD	Release button dimensions			L	A	M	Effective area [mm²] Nylon Urethane			Min. port size	Weight [g]
				X	Y	ϕO	ϕN	Thickness						
$\phi 3.2$	$\phi 4$	KQ2R23-04A1	7.1	6.7	9.5	28.6	15.3	13.3	3.4	2.9	2.5	0.8	2.5	0.8
	$\phi 6$	KQ2R23-06A1	7.1	6.7	9.5	29.1	15.8	13.3	3.4	2.9	2.5	1		
$\phi 4$	$\phi 6$	KQ2R04-06A1	8.2	7.7	10	28.6	15.3	13.3	5.6	4	3	1.1	3	1.1
	$\phi 8$	KQ2R04-08A1	8.2	7.7	10	29.6	15.4	13.3	5.6	4	3	1.3		
$\phi 6$	$\phi 10$	KQ2R04-10A1	10.4	7.7	10	31.7	16.1	13.3	5.6	4	3	2.2	3	2.2
	$\phi 4$	KQ2R06-04A1	10.4	9.7	12	33.6	20.3	13.3	4	4	2.5	1.4		
$\phi 6$	$\phi 8$	KQ2R06-08A1	10.4	9.7	12	31.6	17.4	13.3	13.1	10.4	4.5	1.7	4.5	1.7
	$\phi 10$	KQ2R06-10A1	10.4	9.7	12	33.9	18.3	13.3	13.1	10.4	4.5	2.1		
	$\phi 12$	KQ2R06-12A1	12	9.7	12	35.7	18.7	13.3	13.1	10.4	4.5	3.2		

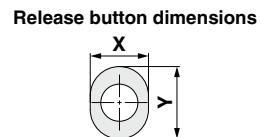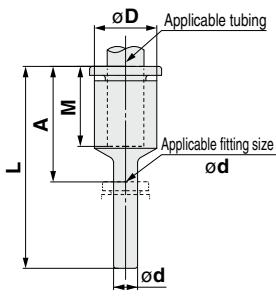

Metric Size One-touch Fittings KQ2 Series

Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc


Dimensions

Bulkhead Union: KQ2E (Interchangeable with KQ)




Applicable tubing O.D. [mm]	Model	T (M)	H (Width across flats)	Release button dimensions		L	Mounting hole	M	Effective area [mm²]		Min. port size	Weight [g]
				X	Y				Nylon	Urethane		
ø3.2	KQ2E23-00□1	M12 x 1	14	6.7	9.5	27.3	13	13.3	3.4	2.9	2.5	24.1
ø4	KQ2E04-00□1	M12 x 1	14	7.7	10	27.3	13	13.3	5.6	4	3	22.9
ø6	KQ2E06-00□1	M14 x 1	17	9.7	12	27.3	15	13.3	13.1	10.4	4.5	28

□: A (Brass), N (Brass + Electroless nickel plating)

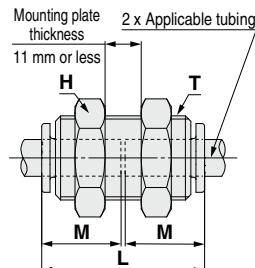

Release button dimensions



Oval Type

Metric Size M, R, Rc
Inch Size UNF, NPT
Inch Size G

Face Seal

Metric Size R, Rc
Inch Size NPT


Gasket Seal
Inch Size Uni
Metric Size Uni
Inch Size R

Bulkhead Connector: KQ2E



Applicable tubing O.D. [mm]	Connection thread Rc	Model	T (M)	H1 (Width across flats)	H2 (Width across flats)	L1	L2	Release button dimensions		Mounting hole	M	Effective area [mm²]		Min. port size	Weight [g]
								X	Y			Nylon	Urethane		
ø3.2	1/4	KQ2E23-02□1	M12 x 1	17	14	28.7	14.3	6.7	9.5	13	13.3	3.4	2.9	2.5	31.2
ø4	1/8	KQ2E04-01□1	M12 x 1	14	14	24.4	10	7.7	10	13	13.3	5.6	4	3	21.2
	1/4	KQ2E04-02□1	M12 x 1	17	14	29	14.6	7.7	10	13	13.3	5.6	4	3	30.9
	1/8	KQ2E06-01□1	M14 x 1	17	17	23.6	9.2	9.7	12	15	13.3	13.1	10.4	4.5	28.9
ø6	1/4	KQ2E06-02□1	M14 x 1	17	17	28.4	14	9.7	12	15	13.3	13.1	10.4	4.5	32.4
	3/8	KQ2E06-03□1	M14 x 1	19	17	30.7	16.3	9.7	12	15	13.3	13.1	10.4	4.5	35.9

□: A (Brass), N (Brass + Electroless nickel plating)

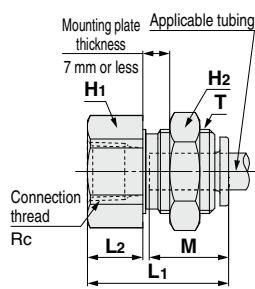

Release button dimensions



Face Seal

Metric Size R, Rc
Inch Size NPT


Gasket Seal
Inch Size Uni
Metric Size Uni
Inch Size R

Bulkhead Male Elbow: KQ2LE



Applicable tubing O.D. [mm]	Model	T (M)	H1 (Width across flats)	H2 (Width across flats)	B	E	øD	Release button dimensions		Mounting hole	M	Effective area [mm²]		Min. port size	Weight [g]	With a rib
								X	Y			Nylon	Urethane			
ø4	KQ2LE04-00□1	M12 x 1	14	14	14.8	28.5	8.2	7.7	10	13	13.3	4.2	4.2	3	21.2	●
ø6	KQ2LE06-00□1	M14 x 1	17	17	15.5	29.6	10.4	9.7	12	15	13.3	11.4	9	4.5	29.4	—

□: A (Brass), N (Brass + Electroless nickel plating)

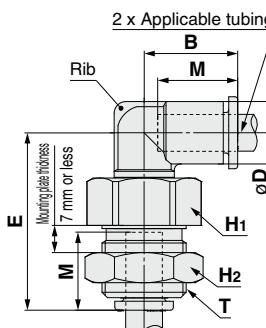

Release button dimensions



Face Seal

Metric Size R, Rc
Inch Size NPT

Gasket Seal
Inch Size Uni
Metric Size Uni
Inch Size R

KQ2 Series


Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

Dimensions

Plug: KQ2P



Applicable fitting size $\varnothing d$	Model	$\varnothing D$	L	A	Weight [g]
$\varnothing 2$	KJP-02	3	17	5.1	0.1
$\varnothing 3.2$	KQ2P-23	5	31.5	18.2	1
$\varnothing 4$	KQ2P-04	6	32	18.7	1
$\varnothing 6$	KQ2P-06	8	35	21.7	1
$\varnothing 8$	KQ2P-08	10	39	24.8	2
$\varnothing 10$	KQ2P-10	12	43	27.4	3.5
$\varnothing 12$	KQ2P-12	14	45.5	28.5	5
$\varnothing 16$	KQ2P-16	20.9	47	26.4	8

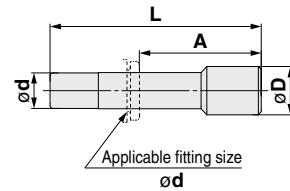


Adapter: KQ2N (Gasket seal)



Applicable fitting size $\varnothing d$	Connection thread M	Model	H (Width across flats)	L	A	M	Min. port size	Weight [g]
$\varnothing 4$	M5 x 0.8	KQ2N04-M5□	7	29.7	26.7	13.4	2.5	2.4
$\varnothing 6$	M5 x 0.8	KQ2N06-M5□	7	29.7	26.7	13.4	2.5	2.6

□: A (Brass), N (Brass + Electroless nickel plating)

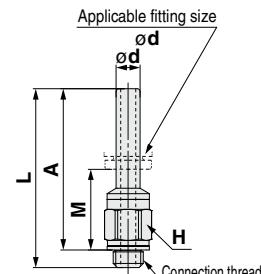


Adapter: KQ2N (Sealant)



Applicable fitting size $\varnothing d$	Connection thread R	Model	H (Width across flats)	L	A ^{*1}	M	Min. port size	Weight [g]
$\varnothing 4$	1/8	KQ2N04-01□S	10	28.3	25.2	11.9	2.5	4
$\varnothing 6$	1/8	KQ2N06-01□S	10	28.3	25.2	11.9	4	4.1
$\varnothing 6$	1/4	KQ2N06-02□S	14	32.8	28.1	14.8	4	13.6
$\varnothing 8$	1/4	KQ2N08-02□S	14	35.9	31.2	17	6	15.7
$\varnothing 8$	3/8	KQ2N08-03□S	17	36	30.9	16.7	6	22.7
$\varnothing 10$	3/8	KQ2N10-03□S	17	40.6	35.5	19.9	7.5	19.1

□: A (Brass), N (Brass + Electroless nickel plating)


*1 Reference dimensions after installation of R thread

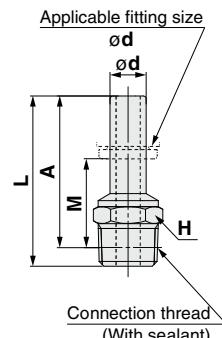


Tube Cap: KQ2C



Applicable tubing O.D. [mm]	Model	$\varnothing D$	Release button dimensions		L	M	Weight [g]
			X	Y			
$\varnothing 4$	KQ2C04-00A1	8.2	7.7	10	14.5	13.3	0.8
$\varnothing 6$	KQ2C06-00A1	10.4	9.7	12	14.6	13.3	1.1

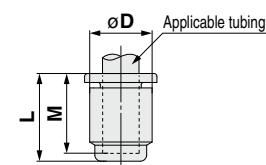

Release button dimensions



Metric Size One-touch Fittings **KQ2 Series**


Oval Type Applicable Tubing: Metric Size, Connection Thread: M, R, Rc

Dimensions

Nipple: KQ2N



Applicable fitting $\varnothing D$	Model	L	M	$\varnothing d$	Min. port size	Weight [g]
$\varnothing 4$	KQ2N04-99	37	13.3	2.5	2.5	1
$\varnothing 6$	KQ2N06-99	39	13.3	4	4	2
$\varnothing 8$	KQ2N08-99	43	14.2	6	6	2
$\varnothing 10$	KQ2N10-99	49	15.6	7.5	7.5	4
$\varnothing 12$	KQ2N12-99	52	17	9	9	3.3
$\varnothing 16$	KQ2N16-99	57	20.6	13	13	4.8

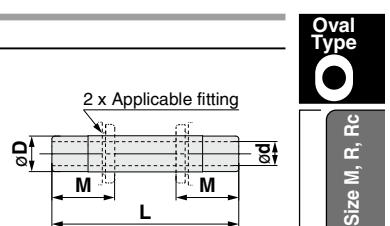

Oval Type

Metric Size M, R, Rc

Sealant/Gasket Seal

Inch Size UNF, NPT

Inch Size M, R, Rc

Metric Size G

Face Seal

Inch Size NPT

Inch Size R


Metric Size Uni

Gasket Seal

Reducer Nipple: KQ2N



Applicable fitting (a) (b)	Model	L	M1	M2	$\varnothing d$ Min. port size	Weight [g]
$\varnothing 4 \quad \varnothing 6$	KQ2N04-06	38	13.3	13.3	2.5	2
$\varnothing 6 \quad \varnothing 8$	KQ2N06-08	42	14.2	13.3	4	2
$\varnothing 8 \quad \varnothing 10$	KQ2N08-10	47	15.6	14.2	6	2
$\varnothing 10 \quad \varnothing 12$	KQ2N10-12	51	17	15.6	7.5	3.1
$\varnothing 12 \quad \varnothing 16$	KQ2N12-16	55	20.6	17	9	4.9

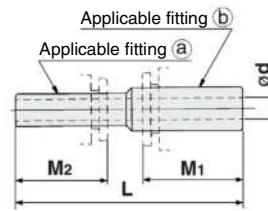

Inch Size M, R, Rc

Inch Size UNF, NPT

Metric Size G

Metric Size R

Inch Size Uni


Gasket Seal

Metric Size Uni

Inch Size R


Metric Size G

Color Cap: KQ2C

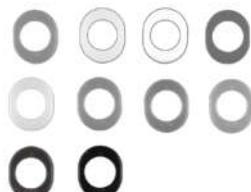

Applicable tubing O.D. [mm]	Model	X	Y	L	Weight [g]
$\varnothing 3.2$	KQ2C-23□B	7.3	10	2.6	0.1
$\varnothing 4$	KQ2C-04□B	8.3	10.5	2.6	0.1
$\varnothing 6$	KQ2C-06□B	10.3	12.5	2.6	0.1

□: B (Black), R (Red), YR (Orange), BR (Brown), Y (Yellow), G (Green), CB (Sky blue), GR (Gray), W (White), BU (Blue)

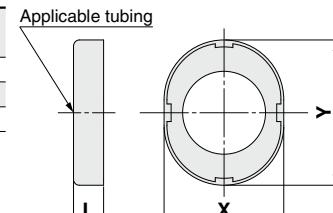

Metric Size G

Inch Size Uni

Gasket Seal

Metric Size Uni

Inch Size R

KQ2 Series

Made to Order/Clean Series/Spare Parts

Please contact SMC for detailed dimensions, specifications, and lead times.

1 Made to Order

Symbol	Specifications
X12	Lubricant: White vaseline Release button color: White
X35 ^{*1}	Body color: Black Release button color: Light gray
X41	With fixed orifice ^{*2}

*1 The following models are not available as made-to-order: Hexagon socket head male connector/KQ2S, Bulkhead union/KQ2E, Bulkhead connector/KQ2E, Nipple/KQ2N, Reducer nipple/KQ2N, Male connector/KQ2H, Female connector/KQ2F, Color cap/KQ2C, Plug/KQ2P

*2 Please contact SMC for availability.

The following made-to-order products will be provided based on previous models (KQ2 series). Please contact SMC separately.

Symbol	Specifications
X17	Grease-free Rubber material: NBR (With fluorine coating) Release button color: Light blue
X29	Grease-free Rubber material: NBR (With fluorine coating) Release button color: Light blue Copper-free (With electroless nickel plating)
X34	Rubber material: FKM
X39	Grease-free Rubber material: NBR (With fluorine coating) Release button color: Light blue Clean (Copper-free, air blow, double packaging, resin body: white)
X94	Grease-free Rubber material: FKM (With fluorine coating) Release button color: Light blue

2 Clean Series

Please consult with SMC separately for applicable models.

Symbol	Specifications
10-	Brass parts: With electroless nickel plating Lubricant: Fluorine grease Air blow in a clean room Double packaging Resin body, Release button color: White

Example) 10-KQ2H06-02NS1 (With thread)

10-KQ2H06-00A1 (Without thread)

3 Spare Parts

Description	Part no.	Applicable thread
Gasket	M-3G2	M3
	M-5G2	M5
	M-6G	M6

Brass

Description	Part no.	Applicable model
Pipe nut	KQ04-P01A	KQ2E23-00A1, KQ2E04-00A1, KQ2E23-02A1
		KQ2E04-01A1, KQ2E04-02A1, KQ2LE04-00A1
	KQ06-P01A	KQ2E06-00A1, KQ2E06-01A1, KQ2E06-02A1
		KQ2E06-03A1, KQ2LE06-00A1

Brass + Electroless nickel plating

Description	Part no.	Applicable model
Pipe nut	KQ04-P01N	KQ2E23-00N1, KQ2E04-00N1, KQ2E23-02N1
		KQ2E04-01N1, KQ2E04-02N1, KQ2LE04-00N1
	KQ06-P01N	KQ2E06-00N1, KQ2E06-01N1, KQ2E06-02N1
		KQ2E06-03N1, KQ2LE06-00N1