

LED FILAMENT BULB





LED DT C35/2.5W




LED DTA60/4W/7W


LIGHT DISTRIBUTION DATA

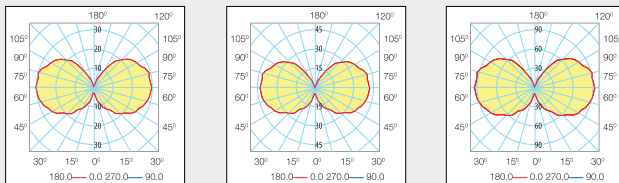


DT N/2.5W



DT A60/4W



DT A60/7W



SPECIFICATIONS

Model	Voltage (V)	Frequency (Hz)	Power (W)	Power Factor	Lumen (lm)	Luminous Efficiency (lm/W)	CCT (K)	CRI (Ra)	Life time (h)	Base cap	Dimension (ΦxH) (mm)
DT C35/2.5W	170÷250	50/60	2.5	0.5	280	100	6500/3000	80	20000	E14	35x122
DT A60/4W	170÷250	50/60	4	0.5	400	100	6500/3000	80	15000	E26/E27/B22	60x108
DT A60/7W	170÷250	50/60	7	0.5	880	125	6500/3000	80	15000	E26/E27/B22	60x108