




## Insulated Male Disconnects

**Material**  
 Insulation: PVC  
 Terminal Body: Brass  
 Plating: Tin

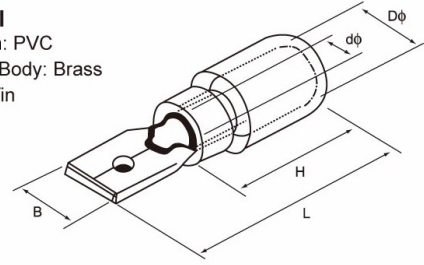

导线截面:  $0.5 \sim 1.5\text{mm}^2$  (美国线规22-16) 最大电流 ·  $I_{\text{max}}=10\text{A}$  材质: 黄铜

型号 ITEM NO	NAMETAB 接插规格	材料 厚度 Thickness of material	尺寸 DIMENSION				
			B	dφ	Dφ	L	H
			mm	mm	mm	mm	mm
MDD 1.25-110(5)	0.5×2.8	0.5	2.8	1.70	4.3	17.7	10.0
MDD 1.25-110(8)	0.8×2.8	0.8	2.8	1.70	4.3	17.7	
MDD 1.25-187(5)	0.5×4.75	0.5	4.75	1.70	4.3	18.5	
MDD 1.25-187(8)	0.8×4.75	0.8	4.75	1.70	4.3	18.5	
MDD 1.25-250	0.8×6.3	0.4	6.3	1.70	4.3	21.0	

导线截面:  $1.5 \sim 2.5\text{mm}^2$  (美国线规16-14) 最大电流 ·  $I_{\text{max}}=15\text{A}$

型号 ITEM NO	NAMETAB 接插规格	材料 厚度 Thickness of material	尺寸 DIMENSION				
			B	dφ	Dφ	L	H
			mm	mm	mm	mm	mm
MDD 2-110(5)	0.5×2.8	0.5	2.8	2.3	4.3	17.7	10.0
MDD 2-110(8)	0.8×2.8	0.8	2.8	2.3	4.3	17.7	
MDD 2-187(5)	0.5×4.75	0.5	4.75	2.3	4.3	18.5	
MDD 2-187(8)	0.8×4.75	0.8	4.75	2.3	4.3	18.5	
MDD 2-250	0.8×6.35	0.4	6.35	2.3	4.3	21.0	

导线截面：4 ~ 6mm<sup>2</sup>(美国线规12-10) 最大电流 · I<sub>max</sub>=24A

型 号 ITEM NO	NAMETAB 接插规格	材料 厚度 Thickness of material	尺 寸 DIMENSION				
			B	dφ	Dφ	L	H
	mm	mm	mm	mm	mm	mm	
MDD 5.5-187	0.5×4.75	0.5	4.75	3.4	5.7	23.0	14.0
MDD 5.5-250	0.8×6.3	0.4	6.3	3.4	5.7	25.0	