

## Serial Communication Modules

### RJ71C24

Max. 230.4 kbps, RS-232 (1 channel), RS-422/485 (1 channel)


### RJ71C24-R2

Max. 230.4 kbps, RS-232 (2 channels)


### RJ71C24-R4

Max. 230.4 kbps, RS-422/485 (2 channels)

## MODBUS®

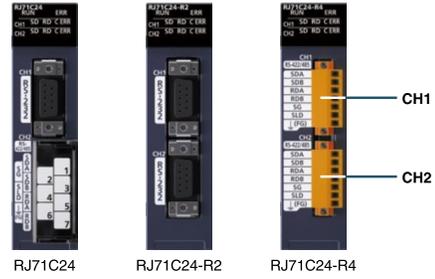

The serial communication module enables serial devices with up to 230.4 kbps transmission speeds to be connected per channel. Communications protocols such as MODBUS® are supported via the pre-defined protocol feature.

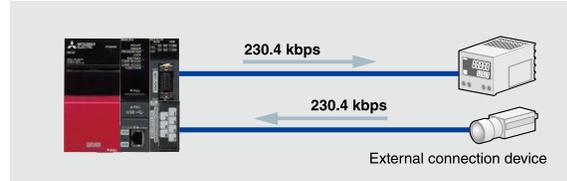

Item	RJ71C24	RJ71C24-R2	RJ71C24-R4
Transmission speed (bps)	1.2k/2.4k/4.8k/9.6k/14.4k/19.2k/28.8k/38.4k/57.6k/115.2k/230.4k		
MODBUS® communication function	Slave function*1		
Interface			
CH1	RS-232	RS-232	RS-422/485
CH2	RS-422/485	RS-232	RS-422/485
Overall transmission distance			
RS-232 (m)	15	15	-
RS-422/485 (m)	1,200	-	1,200
Function			
Firmware update*2		●	

\*1. Master function is supported with predefined protocol support function.

\*2. For more information, please refer to the relevant product manual.