Applicable models

Please check the model No. of your drivers before determining which bit(s) to choose.

Shape	Model No.	Page	Applicable models: Air Screwdriver	Applicable models: Electric Screwdriver
H 5 mm	B36	71P	VESSEL GT-S5TFR·S5TFB·S5TFG·S4TFR·S4TFS·S4TFG Uryu US-40·3.5A·4·4PB/ US-LT○○A/AL series Yokota YD-3·4·400SC	VESSEL VE-4000·4000P·4500·4500P
H 5 mm	B34	71P	VESSEL GT-S4TFR·S4TFS·S4TFG·S5TFR·S5TFB·5TFG Uryu US-40·3.5A·4·4PB (Except B44 Socket Bit Overall Length 70mm) US-LT○○A/AL series Yokota YD-3·4·400SC	VESSEL VE-4000·4000P·4500·4500P Hios PG-7000, BLG-5000BC1/-15/-20/-HT BLG-5000/-15/-20/HT, BL-5000/-15/-20·5020·7000/-20 CL-4000·6000·6500·7000 SS-4000·6500·7000, α-4500·5000·6500 CD-4000·5000·6000·7000 VB-1510/-18·1820·3012·2008·3020 VZ-1510·1812·1820·3012·3007 Delvo DLV ○○○○-EJN/-DJN/-DJE DLV 7(8)120-SPC·7(8)130-SPC·7(8)140-SPC· 7(8)241-SPC·7(8)231-SPC DLV 30LL(P)-SPC·30SL(P)-SPC·30HL(P)-SPC Hitachi Koki WT 3G/3GP·4G/4GP·5G/5GP Kanon 3K-120L·180L·180LF·120P·180P·180PF 9K-130P·140P·130PF·131L·131LF·131P·131PF 5KD-200·300 Panasonic FE-A310S·A310MH·A310L·A111L·A111MH·A111M·A710AXN·A710MHN
H 5 mm	N	71P		
H 5 mm	B44	71P		
H 6.35 mm	B43	72P	Uryu UX-U·UW·ALPHA·UL·UEP·UAT·UA·UDP all driver type US-350W·450WB·5·50·5PB·○○W/PW·LT○○B/BL/PB NPK ND-○○○X. NPW-○○○X Fuji Kuki FLT series D-1·D-2 FPT series D-1. FL series D-1, FPW series D-1 FW series D-1·D-2·D-6·D-7·D-8, FD series D-4·D-5 Yutani D-6SPBL·5WPEB·6WSPEB·6WSHPEB·600SHEB· 604B·8WPE·6SSBEL·6WSHSB DH-6PL·4.5PEB·6PLE·4.5SB·6SELB HPW-4D·6D·6αD·8αD·4SD·6SD·6αSD Yokota TKa60A·70A·80A YEX-120A·150A·501A·100SA·120SA·150SA· 300SA·500SA YLa60A·70A·80A YLT50A·60A·70A·60AL·70AL Y-405A·41A·46A YX-80A·180A·280A·380A·500A·280A·380A· 500A·180SA·280SA·380SA·500SA·280CA·500CA YBX-50A YD-400SCA·500SCA·5PHCA·3A·4A·4.5SZ·5A· 4.5LAZ·6WAZK·600SZ·40PZ·4.5PZK·600PZ· 650PZ·65PTZ·65PZ·670A·670AF·670AR·670A·RF Atlas-Copco LUM·LUF·LUD·TWIST·COMBI series	Yokota YBX-50A Tonichi AUR5N-U (Except U1000CN)·UR·DU ●Following Tool models are applicable only for the single end bits. Hios PG-7000 BLG-4000BC1·5000BC1/-15/-20/-HT BLG-4000·5000/-15/-20/HT BL-3000·5000/-15/-20·5020·7000/-20 CL-4000·6000·6500·7000·9000 SS-4000·6500·7000 α-4500·5000·6500 CD-4000·5000·6000·7000 VB-1510/-18·1820·3012·4504·2008·3020 VBH-1820·3012 VZ-1510·1812·1820·3012·3007·4504·4506 VZH-1820·3012 Delvo DLV ○○○○-EKN/-DKN/-DKE DLV 8150-SPC·7(8)251-SPC DLV 45LL(P)-SPC·45SL(P)-SPC·70LL(P)-SPC Uryu UDBP-AF·TA·A Kanon 9K-150P
H 6.35 mm	B35	73P ~76P		
H 6.35 mm	J	74, 75P		
H 6.35 mm	IP	75P		
H 6.35 mm	X5000	76P		
H 6.35 mm	B45	77P		
H 6.35 mm	MB45	77P		
H 6.35 mm	MB45S	78P		
H 6.35 mm	MB45D	78P		
H 6.35 mm	HB	86P		
H 6.35 mm	HBM	87P		
H 6.35 mm	DBHM	87P		
H 6.35 mm	MMBC	88P		
H 6.35 mm	B39	76P	VESSEL GT- H4RC·H5RC·S6CD·PLRC Yutani D-6WHCL Uryu US-3.5ACB·4CA·5CA· LT30B-○○C·LT40B-○○C Yokota YD-600L YX-280CA·500CA	Kanon (Old model) CN 60LTDK~N 10LTDK(N6~N100LTDK) CN 60STDK~N 10STDK(N6~N100STDK) CN 100~CN 500DPSK(N10~N50DPSK) CN 100~CN 500DPSK-L(N10~N50DPSK(II)) CN 15/CN 30LTDK-H(N1.5/N3LTDK-H) DTDK-CN 500EXL(DTDK-N5EXL)

Manual type Torque Screwdriver

H 5 mm

No. B34 Bit

●For assembly work focusing on workability.
●Hexagonal shape with the width across flats of 5㎜ is also suited for electric drivers.

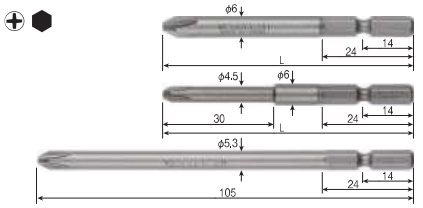

Size Tip×Overall Length (㎜)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕1× 70	H	10	100	422031
100	H	10	100	422032
150	H	10	100	422033
⊕1×4 × 70	H	10	100	422048
⊕1×4×30×70	H	10	100	446335
⊕1×5.3× 105	H	10	100	422034
★ 120	X	10	100	422040
120	H	10	100	422035
⊕2× 70	H	10	100	422041
100	H	10	100	422042
120	H	10	100	422045
150	H	10	100	422043
200	H	10	100	422044
⊕2×3×30×75	H	10	100	446340
⊕2×4.5× 70	H	10	100	422049
⊕2×5.3× 105	H	10	100	422046
120	H	10	100	422047
H 2 × 70	H	10	100	422071
H 2.5× 70	H	10	100	422072
H 3 × 70	H	10	100	422073
H 4 × 70	H	10	100	422074
H 5 × 70	H	10	100	422075

No. N TORX Bit

●For TORX screws popular in the automotive industry.



Size Tip×Overall Length (㎜)	㎜	d1	L1	d2	(㎜)	Inner Ctn.	EDP No.
T5 × 75	1.37	1.67	6.5	4.0		10	635498
100	1.37	1.67	6.5	4.0		10	635499
T6 × 75	1.65	1.95	6.5	4.0		10	635500
100	1.65	1.95	6.5	4.0		10	635501
T8 × 75	2.3	2.60	7.0	4.5		10	635505
100	2.3	2.60	7.0	4.5		10	635506
T10× 75	2.72	3.02	7.5	4.5		10	635510
100	2.72	3.02	7.5	4.5		10	635511
T15× 75	3.26	3.56	7.5	4.5		10	635515
100	3.26	3.56	7.5	4.5		10	635516
T20× 75	3.84	4.14	7.5	5.0		10	635520
100	3.84	4.14	7.5	5.0		10	635521
T25× 75	4.4	4.70	8.0	5.0		10	635525
100	4.4	4.70	8.0	5.0		10	635526
T27× 75	4.96	5.26	8.0	5.5		10	635530
100	4.96	5.26	8.0	5.5		10	635531

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).
VESSEL has a manufacturing license in Japan and selling same to the world.

No. N TORX Bit (Tamper-Proof)

●For TORX screws popular in the automotive industry.
●With a round hole for tamper-proof.



Size Tip×Overall Length (㎜)	㎜	d1	L1	d2	(㎜)	Inner Ctn.	EDP No.
T10H× 75	2.72	3.02	7.5	4.5		10	635551
100	2.72	3.02	7.5	4.5		10	635552
T15H× 75	3.26	3.56	7.5	4.5		10	635553
100	3.26	3.56	7.5	4.5		10	635554
T20H× 75	3.84	4.14	7.5	5.0		10	635555
100	3.84	4.14	7.5	5.0		10	635556
T25H× 75	4.4	4.70	8.0	5.0		10	635557
100	4.4	4.70	8.0	5.0		10	635558

TORX is a registered trademark of Acument TM Intellectual Properties, LLC (USA).
VESSEL has a manufacturing license in Japan and selling same to the world.

No. B44 Socket Bit

●Socket bit for Hex screws.

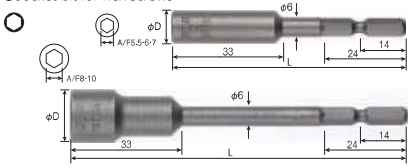

Size Tip×Overall Length (㎜)	φD	Drilling holes depth	(㎜)	Inner Ctn.	Outer Ctn.	EDP No.
A/F 5.5× 70	9	25		10	250	422371
100	9	25		10	250	422381
6× 70	10	25		10	200	422372
100	10	25		10	200	422382
7× 70	11	25		10	200	422373
100	11	25		10	150	422383
8× 70	13	25		10	200	422374
100	13	25		10	150	422384
10×100	16	25		10	100	422385

H 5 mm

No. B36 Double End Bit

●If one end breaks, the other end can be used.
●For assembly work focusing on workability.

Size Tip×Overall Length (㎜)	Heat treatment classification	Inner Ctn.	Outer Ctn.	EDP No.
⊕1× 70	H	10	100	423031
100	H	10	100	423032
⊕2× 70	H	10	100	423041
100	H	10	100	423042
150	H	10	100	423043
200	H	10	100	423044