




LED MICA OVAL PCFOO Series

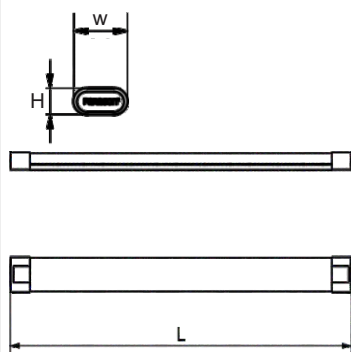

Note:

- Published lumen is total luminous flux of luminaire
- PF ≥ 0.5
- Lifespan: 25,000 hours
- CRI ≥ 80

≥ 0.5	80Ra	IP20	25,000 Hours	AC220 240V	50-60Hz
Power factor	CRI	Protection grade	Lifespan	Voltage	Frequency

Outstanding features

- LED chip Bridgelux/Seoul
- High color rendering
- 3000K(Warm white) / 4200K(Neutral white) / 6500K(Cool daylight)
- High quality diffuser cover
- Flicker-free
- Low glare
- Easy installation and maintenance
- Minimise blue light emission

SPECIFICATION AND PRICE

Model	PCFOO20L	PCFOO30L	PCFOO50L	PCFOO75L
LED chip	Bridgelux/Seoul			
Efficacy (Lm/W)	120	120	120	120
Lumen (Lm)	2400	3600	6000	9000
Color temperature (K)	3000/4200/6500			
Wattage (W)	20W $\pm$ 2	30W $\pm$ 3	50W $\pm$ 5	75W $\pm$ 7
Operating temperature	-20~40°C			
Dimensions (mm) (LxWxH)	600x60x30	600x79x29	1200x60x30	1200x79x29
Unit price (USD)	\$10.87	\$15.22	\$17.30	\$21.65

Suggested installation areas



Apartment



Supermarket



Retail Store



Office