




SURFACE OR SUSPENDED LUMINAIRE PHLN Series



Note:

- Published lumen is total luminous flux of luminaire
- Customizable dimensions
- Lifespan: 25,000 hours
- CRI ≥ 80


≥0.9 Power factor	80Ra CRI	IP20 Protection grade	25,000 Hours Lifespan	AC220 240V Voltage	50-60Hz Frequency
----------------------	-------------	--------------------------	-----------------------------	--------------------------	----------------------

Outstanding features

- Bridgelux/Epistar
- High quality aluminium alloy heat sink
- 3000K(Warm white) / 4200K(Neutral white) / 6500K(Cool daylight)
- Tunable white - 3000K - 6500K
- RGB color function (*)
- Low glare
- No UV radiation
- Minimise blue light emission

SPECIFICATION AND PRICE

Model	PHLN10L	PHLN20L
LED chip	Bridgelux/Epistar	
Efficacy (Lm/W)	80	80
Lumen (Lm)	800	1600
Color temperature (K)	3000/4200/6500	
Wattage (W)	10W±1	20W±2
Operating temperature	25,000	
Dimensions (mm)	585x75x74.5	1185x75x74.5
Unit price (USD)	\$51.43	\$98.74

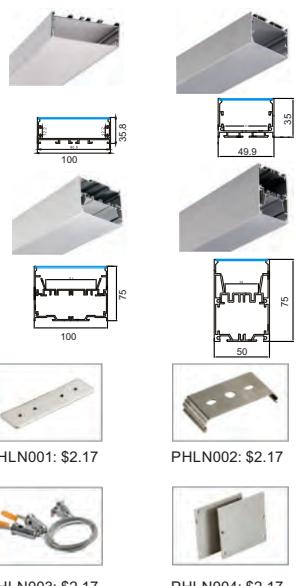

(*)



PHLN001: \$2.17

PHLN002: \$2.17



PHLN003: \$2.17

PHLN004: \$2.17

Suggested installation areas



Apartment



Supermarket



Retail Store



Office



Hotel



School



Hospital

(*) Available upon request

- Customizable dimensions and adjustable colour temperature are available upon request