


Guide for selection of wheels : Heat-resistant casters

Image	Series	Description	Wheel code	Wheel dia mm	Wheel width mm	Axle bore mm	Hub length mm	Load capacity Kg	Bearing type
	FRD	<ul style="list-style-type: none"> - Fluoro rubber (Shore A85) - Aluminum core - Two ball bearings 	FRD-75-30	75	30	8	30	60	608 ZZ
			FRD-100-30	100	30	8	30	80	608 ZZ
			FRD-125-30	125	30	8	30	100	608 ZZ


FOOT MASTER®

Heat-resistant casters

PL series



60~100kg RoHS -10~250°C

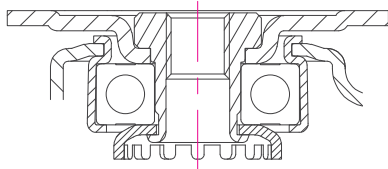

Brackets: Pressed steel plate, precision ball bearing in the swivel head which is advantageous to smooth swiveling and excellent durability, strong integrated pressed steel frame, bolted wheel axle structure, heat-resistant special grease applied

Surface Treatment: Zinc plated

* Recommended Load = Load Cap. × 3

Swivel	Rigid	Wheel type	mm	mm	Kg	mm	mm	mm	mm	mm
PL-75-ASF	PL-75-ARF	FRD	75	30	60	112.5	40	95x64	78x45 72x45	9
PL-100-ASF	PL-100-ARF		100	30	80	137.5	40			
PL-125-ASF	PL-125-ARF		125	30	100	162.5	40			

Options

Code Suffix	FRD						
Description	Flu, Rubber(A85)						
Available for	75 ~ 125						

FOOT MASTER®


Heat-resistant casters

PL series

 **60~100kg**

RoHS









 **-10~250°C**




Brackets: Forged steel bolt, precision ball bearing in the swivel head which is advantageous to smooth swiveling and excellent durability, strong integrated pressed steel frame, bolted wheel axle structure, heat-resistant special grease applied

Surface Treatment: Zinc plated

* Recommended Load = Load Cap. × 3

Swivel	Wheel type	 mm	 mm	 Kg	 mm	 mm	 mm	 mm	 mm
PL-75-ASS	FRD	75	30	60	112.5	40	5/8"-11UNC M12x1.75P 1/2"-12UNC	10.5+25	22
PL-100-ASS		100	30	80	137.5	40			
PL-125-ASS		125	30	100	162.5	40			

Options

						
Code Suffix	FRD					
Description	Flu, Rubber(A85)					
Available for	75 ~ 125					