




## SURFACE OR SUSPENDED LUMINAIRE PMRC Series

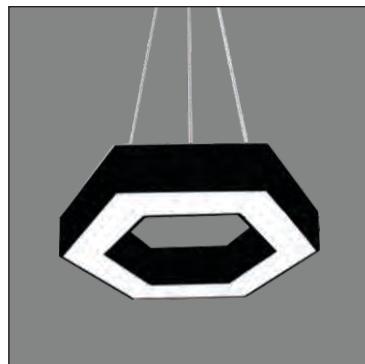

### Note:

- Published lumen is total luminous flux of luminaire
- Customizable dimensions
- Lifespan: 25,000 hours
- CRI  $\geq 80$



$\geq 0.5$	80Ra	IP20	25,000 Hours	AC220-240V	50-60Hz
Power factor	CRI	Protection grade	Lifespan	Voltage	Frequency

### Outstanding features

- Bridgelux/Epistar
- High quality aluminium alloy heat sink
- 3000K(Warm white) / 4200K(Neutral white) / 6500K(Cool daylight)
- Tunable white - 3000K-6500K
- RGB color function (\*)
- Low glare
- No mercury, environmentally friendly
- Easy installation and maintenance

## SPECIFICATION AND PRICE

Model	PMRC800L72
LED chip	Bridgelux/Epistar
Efficacy (Lm/W)	70
Lumen (Lm)	5040
Color temperature (K)	3000/4200/6500
Wattage (W)	72W $\pm$ 7
Lifespan (hrs)	25,000
Dimensions (mm)	800x100x60
Unit price (USD)	<b>\$109.17</b>



### Suggested installation areas



Apartment



Supermarket



Retail Store



Office



Hotel



School



Hospital

(\*) Available upon request

- Customizable dimensions and adjustable colour temperature are available upon request