





LED



LED SURFACE DOWNLIGHT PSDRR Series

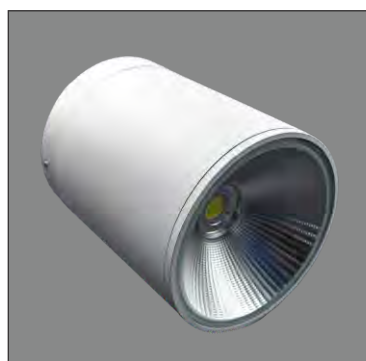

Note:

- Published lumen is total luminous flux of luminaire
- PF ≥ 0.9
- Lifespan: 50,000 hours
- CRI ≥ 80

≥ 0.9	80Ra	IP20	50,000 Hours	AC100 240V	50-60Hz
Power factor	CRI	Protection grade	Lifespan	Voltage	Frequency

Outstanding features

- Bridgelux/Nichia
- High quality aluminium alloy heat sink
- 3000K(Warm white) / 4200K(Neutral white) / 6500K(Cool daylight)
- High color rendering
- Flicker-free
- Low glare
- Easy installation and maintenance
- Energy saving

SPECIFICATION AND PRICE

Model	PSDRR145L10	PSDRR160L20	PSDRR180L25	PSDRR200L30
LED chip	Bridgelux/Nichia			
Wattage (W)	10W	20W	25W	30W
Efficacy (Lm/W)	100	100	100	100
Lumen (Lm)	1000	2000	2500	3000
Color temperature (K)	3000/4200/6500			
Dimensions (mm)	145x200	160x200	180x300	200x300
Installation	gắn nổi			
Unit price (USD)	\$63.83	\$82.78	\$123.52	\$145.83

Suggested installation areas



Apartment



Supermarket



Retail Store



Office



Hotel



School



Hospital