

**TOP PLATE FITTING**

**660 PUZ**

In Compliance to Japan Standard Specification **SERIES 180 - 660 KGS**




**Castor**

**660**  
Bracket made of heavy gauged steel  
Metal parts: Electro-galvanized finished

**Wheel**

**PUZ Polyurethane**  
Inserted ball bearing for resilience and long-lasting lubrication  
Hardness: 94± PU interlocked to heavy gauged steel-core.  
Medium duty industrial usage. Temperature range -30°C to +70°C

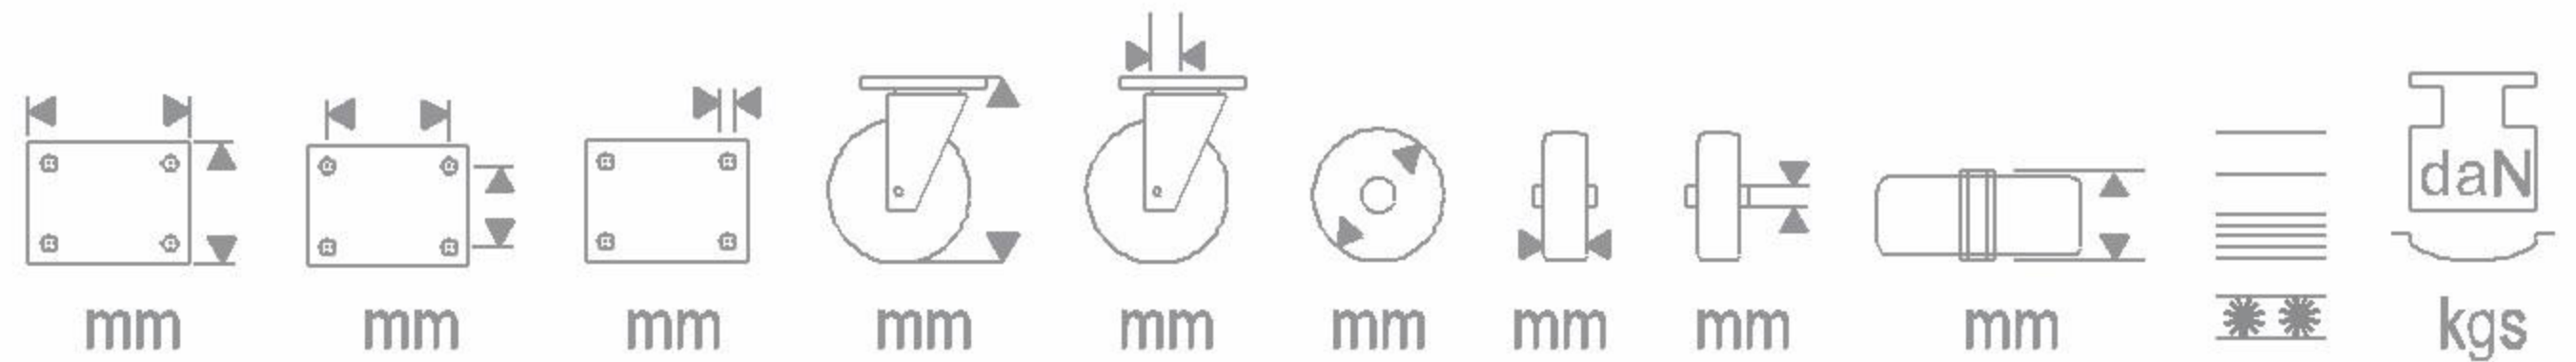

	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	daN	kgs
661 PUZ 075 J01	82x82	63x63	9.5	101	22	75	32	10	35	***	180	
661 PUZ 100 J01	95x95	71x71	10.5	144	35	100	34	12	38	***	250	
661 PUZ 130 J01	108x108	80x80	11	177	40	130	36	20	52	***	350	
661 PUZ 150 J01	120x120	90x90	11	198	45	150	38	20	55	***	400	
661 PUZ 200 J01	140x140	112x112	11.5	250	58	200	42	20	55	***	520	
661 PUZ 250 J01	160x160	125x125	14	305	71	250	45	25	62	***	660	



662 PUZ 075 K02	95x72	63x40	9.5	101	-	75	32	10	35	***	180
662 PUZ 100 K02	115x80	80x45	10.5	144	-	100	34	12	38	***	250
662 PUZ 130 K02	137x93	100x56	11	177	-	130	36	20	52	***	350
662 PUZ 150 K02	137x93	100x56	11	198	-	150	38	20	55	***	400
662 PUZ 200 K02	155x102	112x63	11.5	250	-	200	42	20	55	***	520
662 PUZ 250 K02	200x140	140x80	14	305	-	250	45	25	62	***	660



663 PUZ 075 JB1	82x82	63x63	9.5	101	22	75	32	10	35	***	180
663 PUZ 100 JB1	95x95	71x71	10.5	144	35	100	34	12	38	***	250
663 PUZ 130 JB1	108x108	80x80	11	177	40	130	36	20	52	***	350
663 PUZ 150 JB1	120x120	90x90	11	198	45	150	38	20	55	***	400
663 PUZ 200 JB1	140x140	112x112	11.5	250	58	200	42	20	55	***	520
663 PUZ 250 JB1	160x160	125x125	14	305	71	250	45	25	62	***	660



	mm	mm	mm	mm	mm	daN	kgs
PUZ 075x32	75	32	10	35	***	180	
PUZ 100x34	100	34	12	38	***	250	
PUZ 130x36	130	36	20	52	***	350	
PUZ 150x38	150	38	20	55	***	400	
PUZ 200x42	200	42	20	55	***	520	
PUZ 250x45	250	45	25	62	***	660	