


QT70L-BZ

Ø70mm Multi-Functional Modular LED Tower Lights with Buzzer



QT70L-BZ


Color Options:

Beige color is available



Technical Diagram (Units : mm)

QT70L-BZ

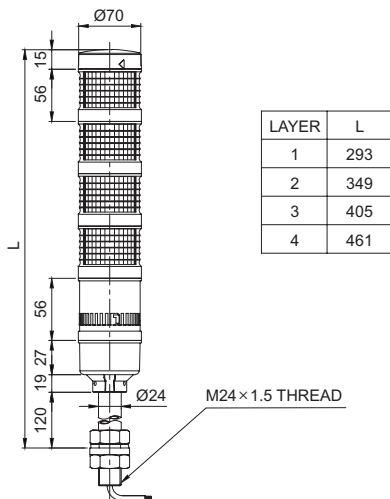

Customization

- Customized pole length available
- Beige color
- LED strobe (Model number : QT70LS-BZ)
- LED simulated revolving (Model number : QT70LR-BZ)



QT70L-BZ Ø70mm Pole Mount Modular LED Tower Lights with Buzzer

Product consist of cover, LED modules, buzzer module, base module, and pole module



Specifications

Model number	Layer	Voltage	Current	Certificates	Weight	Color
QT70L-BZ QT70LF-BZ (Max 90dB)	1	DC12V	0.115A	CE DC24V only	0.50kg	• R-Red
		DC24V	0.080A		0.50kg	
		AC110V	0.110A		0.51kg	
		AC220V	0.110A		0.51kg	
	2	DC12V	0.215A		0.58kg	• R-Red • G-Green
		DC24V	0.130A		0.88kg	
		AC110V	0.130A		0.59kg	
		AC220V	0.130A		0.59kg	
	3	DC12V	0.315A		0.65kg	• R-Red • A-Amber • G-Green
		DC24V	0.180A		0.65kg	
		AC110V	0.150A		0.66kg	
		AC220V	0.150A		0.66kg	
	4	DC12V	0.415A		0.73kg	• R-Red • A-Amber • G-Green • B-Blue
		DC24V	0.230A		0.73kg	
		AC110V	0.170A		0.74kg	
		AC220V	0.170A		0.74kg	

QT70L Steady Module + Base Module(BS) + Buzzer Module(BZ)
 QT70LF Flashing Module + Pole Module(PB)

※ Please refer to page 105-108 for detailed specification of module.



Wiring Instructions

- LED tower light can be wired with external contact and transistor

※ Please refer to page 115 for detailed information about the wiring instructions.



Mounting Bracket

Standard	LB24	LW24	QZ24	SZ24	QL24	SL24	QLA24
Steel	Steel	PC	PC	Al	PC	Al	PC

※ Please refer to page 190-195 for detailed dimension of mount brackets.



Ordering Specification

QT70L-BZ	-	3	-	24	-	RAG	-	QZ24
[Model number]		[Layer]		[Voltage]		[Color]		[Mounting bracket]
• QT70L-BZ • QT70LF-BZ		• 1-1Layer • 2-2Layers • 3-3Layers • 4-4Layers		• 12-DC12V • 24-DC24V • 110-AC110V • 220-AC220V		• R-Red • A-Amber • G-Green • B-Blue		• None • -Standard • Bracket • -LB24 • -LW24 • -QZ24 • -SZ24 • -QL24 • -SL24 • -QLA24