


QT70ML-BZ

Ø70mm Multi-Functional Modular LED Tower Lights with Buzzer



Technical Diagram (Units : mm)

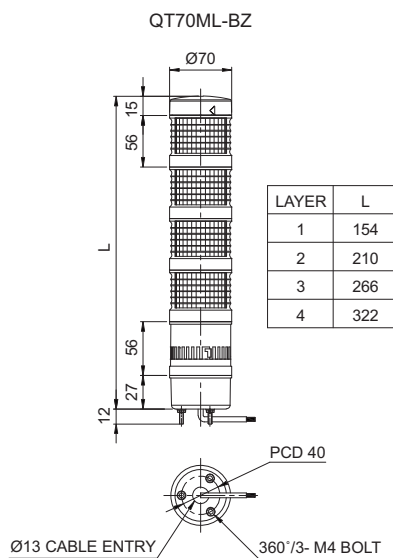

QT70ML-BZ Ø70mm Direct Mount Modular LED Tower Lights with Buzzer

Consist of LED module, base module and buzzer module

Specifications

Model number	Layer	Voltage	Current	Certificates	Weight	Color	
QT70ML-BZ QT70MLF-BZ (Max 90dB)	1	DC12V	0.135A	CE DC only	0.26kg	● R-Red	
		DC24V	0.088A		0.26kg		
		AC110V	0.039A		0.27kg		
		AC220V	0.058A		0.27kg		
	2	DC12V	0.265A		0.34kg	● R-Red ● G-Green	
		DC24V	0.148A				0.34kg
		AC110V	0.057A				0.35kg
		AC220V	0.078A				0.35kg
	3	DC12V	0.375A		0.42kg	● R-Red ● A-Amber ● G-Green	
		DC24V	0.208A				0.42kg
		AC110V	0.075A				0.43kg
		AC220V	0.098A				0.43kg
	4	DC12V	0.495A		0.49kg	● R-Red ● A-Amber ● G-Green ● B-Blue	
		DC24V	0.268A				0.49kg
		AC110V	0.093A				0.50kg
		AC220V	0.118A				0.50kg

QT70L Steady Module + Base Module(BS) + Buzzer(BZ)
 QT70LF Steady/Flashing Module

* Please refer to page 348-351 for detailed specification of module.

Wiring Instructions

- LED tower light can be wired with external contact and transistor
- * Please refer to page 358 for detailed information about the wiring instructions.

Customization

- Beige color
- LED strobe (Model number : QT70MLS-BZ)
- LED simulated revolving (Model number : QT70MLR-BZ)
- Wall mount bracket :
Bracket structure allows for threading through the bracket hole or into the wall mount



Ordering Specification

QT70ML-BZ	-	3	-	220	-	RAG
[Model number]		[Layer]		[Voltage]		[Color]
• QT70ML-BZ • QT70MLF-BZ		• 1-1Layer • 2-2Layers • 3-3Layers • 4-4Layers		• 12-DC12V • 24-DC24V • 110-AC110V • 220-AC220V		• R-Red • A-Amber • G-Green • B-Blue



Warning/
Signal/
Stackable



Signal &
Electric Horn/
Speakers



Vessels and
Heavy-Duty
Equipment



Explosion
Proof



Warning
Light Bar



Aviation
Obstruction
Lights



Signal Tower
Lights



USB/ETN
Signal Tower
Lights



Wireless
Network
System



Electric Horn/
Speakers



Industrial
LED Lights