
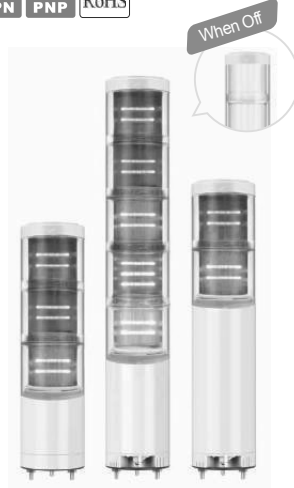



QTC50ML

Qlightec

Ø50mm LED Steady/Flashing Tower Lights



QTC50ML series

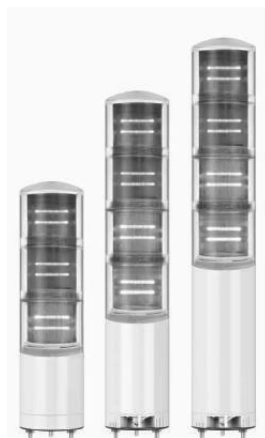

QTCA50ML series

• Customization



- High buzzer module equipped on top/ Black housing tower lights.

QTC50ML Ø50mm Direct Mount, LED Steady/Flashing Type

Model number	Layer	Voltage	Current	Certificates	Weight	Color				
QTC50ML Steady	1	AC/DC12V	0.085A	 DC24V only	0.20kg	● R-Red				
QTC50ML-BZ Steady /w built-in buzzer		AC/DC24V	0.065A		0.20kg					
QTC50MLF Steady/Flashing		AC110V-220V	Max. 0.045A		0.30kg					
QTC50MLF-BZ Steady/Flashing /w built-in buzzer	2	AC/DC12V	0.170A		 DC24V only	0.28kg	● R-Red ● G-Green			
QTC50MLF Steady/Flashing		AC/DC24V	0.130A			0.28kg				
QTC50MLF-BZ Steady/Flashing /w built-in buzzer		AC110V-220V	Max. 0.065A			0.38kg				
QTCA50ML Steady	3	AC/DC12V	0.255A			 DC24V only	0.37kg	● R-Red ● A-Amber ● G-Green		
QTCA50ML-BZ Steady /w built-in buzzer		AC/DC24V	0.195A				0.37kg			
QTCA50MLF Steady/Flashing		AC110V-220V	Max. 0.085A				0.47kg			
QTCA50MLF-BZ Steady/Flashing /w built-in buzzer	4	AC/DC12V	0.340A				 DC24V only	0.45kg	● R-Red ● A-Amber ● G-Green ● B-Blue	
QTCA50MLF Steady/Flashing		AC/DC24V	0.260A					0.45kg		
QTCA50MLF-BZ Steady/Flashing /w built-in buzzer		AC110V-220V	Max. 0.105A					0.55kg		
QTC50MLF-BZ Steady/Flashing /w built-in buzzer	5	AC/DC12V	0.425A					 DC24V only	0.54kg	● R-Red ● A-Amber ● G-Green ● B-Blue ● W-White
QTC50MLF Steady/Flashing		AC/DC24V	0.325A						0.54kg	
QTC50MLF-BZ Steady/Flashing /w built-in buzzer		AC110V-220V	Max. 0.125A						0.64kg	

※ AC type model has a free-voltage range of 100V-240V.

Signal/ Audible Line Current(per each layer)

Voltage	AC/DC12V	AC/DC24V	AC110V-220V
Signal line current	0.085A	0.065A	Max 0.045A
Audible line current	0.025A	0.060A	Max 0.040A

Wiring Instructions

- External power line standard : UL1015 AWG18(0.75sq)×2C 400mm
- Signal line standard : UL1007 AWG22(0.3sq) 400mm
- LED tower light can be wiring with external contact and transistor

※ Please refer to page 331-332 for detailed wiring instructions.

Customization

- High buzzer module equipped on top(Lens should be within 4 layers)
- Black housing tower lights
- 2 buzzer sound types : Both prolonged (beep, beep) and staccato (beep, beep, beep) buzzer output available
- Wall mount bracket options : Bracket structure allows for threading through the bracket hole or into the wall mount



Ordering Specification

QTC50ML	-	3	-	110/220	-	RAG
[Model number]		[Layer]		[Voltage]		[Color]
<ul style="list-style-type: none"> • QTC50ML • QTC50ML-BZ • QTC50MLF • QTC50MLF-BZ • QTCA50ML • QTCA50ML-BZ • QTCA50MLF • QTCA50MLF-BZ 		<ul style="list-style-type: none"> • 1-1Layer • 2-2Layers • 3-3Layers • 4-4Layers • 5-5Layers 		<ul style="list-style-type: none"> • 12-DC12V • 24-DC24V • 110/220 • -AC110V-220V 		<ul style="list-style-type: none"> • R-Red • A-Amber • G-Green • B-Blue • W-White

