

## QWL40 / QWL40-DT



QWL40 / QWL40-DT



### PRODUCT SPECIFICATION

QWL40

**Materials** Housing-Al, Lens-PC, Bracket-STSS  
**Ambient operating temperature** -40°C to +65°C  
**Protection rating** IP68  
**Certificates** CE, UL

- Water / Dust proof LED work light that resists against severe storm and heavily dusty environment
- IP68 protection rating, waterproof & dust resistant model that can be used where dusty and flooded area
- Polycarbonate lens allows excellent vibration and impact resistance.
- Long lifetime with a high intensity LED light source allows for easy maintenance
- Excellent durability that is suitable for harsh environment such as an excavator, crane, and off-road vehicle


### QWL40 / QWL40-DT Water and Dust proof LED Work Lights

Optics Specifications			
Model number	QWL40		QWL40-DT
Lens color		Transparent	
Light color		Cooldaylight	
Color temperature		6,000-7,000K	
Luminous flux		2,650lm	
Illumination(at 1m)		4,000Lux	
Specifications			
Model number	QWL40		QWL40-DT
Voltage		DC12V-24V	
Range for operation voltage		DC11.5V-26.5V	
Power consumption		Max.40W	
Insulation resistance		Min. 50MΩ(500V DC mega ohm meter)	
Withstanding voltage		DC: 500VAC, 60Hz, 1 minute	
Operating temperature		-40°C to +65°C	
Protection rating		IP68	
Materials		Housing-AL, Lens-PC, Bracket-ST3S	
Certifications		 	
Weight(Approx.)		0.70Kg	


### Technical Diagram

Units: mm

•QWL40

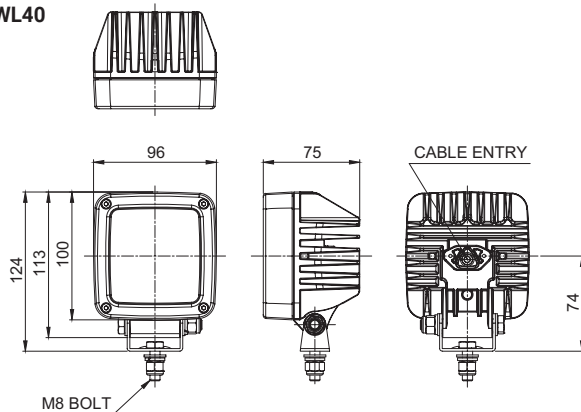

•QWL40-DT

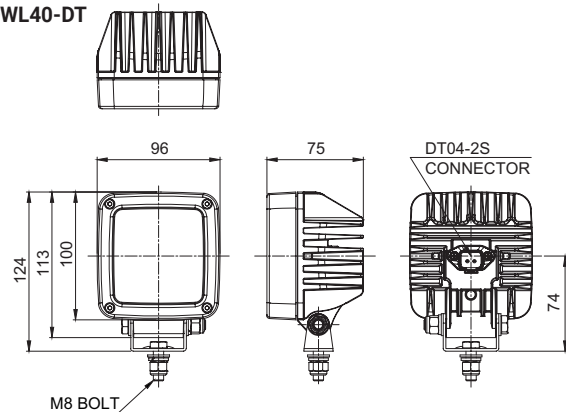

### Ordering Specification

QWL40	-	12/24
[Model number]		[Voltage]
QWL40		12/24-DC12V-24V
QWL40-DT		

### Cautions in use

- Please read user manual carefully prior to operation to ensure safe and correct use. Failure to follow safety instructions may lead to electric shock because of fire and short circuit. Specification and dimensions listed in this catalogue subject to change without notice for product quality improvement.
- The newest product information is available on our website.