


RING TERMINALS (90 DEGREES BEND TERMINALS)

A

RoHS 10
See page 2

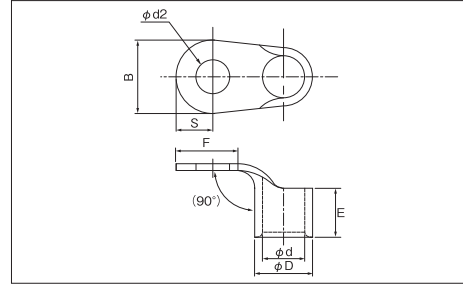

PART NUMBER	DIMENSIONS mm							WIRE RANGE		TOOL No.		STD QTY/BOX	
	φd2	B	S	F(MIN)	E	φD	φd	STRANDED mm ²	AWGor MCM	HAND TOOL No.			
										TOOL BODY No.	DIES No.		
R 1.25-4-B △	4.3	8.0	4.0	8.5	4.5	3.4	1.7	0.25 }	22-16	NH1 · NH69		1,000 (100×10)	
R 1.25-5-B △	5.3	8.0	4.0	8.5				1.65		NA 10 NA 3	N10 01 N3 7		
R 2-4-B △	4.3	8.5	4.2	8.5	4.5	4.2	2.3	1.04 }	16-14	NH1 · NH69 · NH9		1,000 (100×10)	
R 2-5-B △	5.3	9.5	4.7	9.0				2.63		NA 10 NA 3	N10 02 N3 7		
R 5.5-4-B △	4.3	9.5	4.7	10.0	6.5	5.6	3.4	2.63 }	12-10	NH1 · NH9		1,000 (100×10)	
R 5.5-5-B △	5.3	9.5	4.7	10.0				6.64		NA 10 NA 3	N10 03 N3 7		
R 8-4-B △	4.3	12.0	6.0	9.2	8.4	7.1	4.5	6.64 } 10.52	8	NH1 NH9 NOP 60 NOM 60		1,000 (100×10)	
R 8-5-B △	5.3	12.0	6.0	9.2						NA 20	N20 08		
R 8-6-B △	6.4	12.0	6.0	9.2									
R 8-8-B △	8.4	15.0	7.5	15.0									
R 14-5S-B △	5.3	10.0	5.0	10.0	10.0	9.0	5.8	10.52 } 16.78	6	NH9 NOP 60 NOM 60 NOP 150HA NOM 150		100	
R 14-5-B △	5.3	12.0	6.0	11.0						NA 20	N20 14		
R 14-6S-B △	6.4	10.0	5.0	10.0									
R 14-6-B △	6.4	12.0	6.0	11.0									
R 14-8S-B △	8.4	12.0	6.0	11.0									
R 14-8-B △	8.4	16.0	8.0	16.0									
R 22-5S-B △	5.3	11.8	5.9	12.8	12.0	11.6	7.7	16.78 } 26.66	4	NOP 60 NOM 60 NOP 150HA NOM 150		100	
R 22-5-B △	5.3	16.5	8.2	15.0						NA 20	N20 22		
R 22-6S-B △	6.4	11.8	5.9	12.8									
R 22-6-B △	6.4	16.5	8.2	15.0									
R 22-8S-B △	8.4	11.8	5.9	12.8									
R 22-8-B △	8.4	16.5	8.2	15.0									
R 38-6S-B △	6.4	15.3	7.6	17.0	13.0	13.4	9.4	26.66 } 42.42	2	NOP 60 NOM 60 NOP 150HA NOM 150		100	
R 38-6-B △	6.4	22.0	11.0	21.0						NA 20	N20 38		
R 38-8S-B △	8.4	15.3	7.6	17.0									
R 38-8-B △	8.4	22.0	11.0	21.0									
CB 38-5S-B * △	5.3	13.5	7.5	15.0									
R 60-8-B △	8.4	22.0	11.0	22.0	18.5	15.6	11.4	42.42 } 60.57	1/0	NOP 60, NOM 60 NOP 150HA, NOM 150		100	
R 60-10-B △	10.5									NA 20 NOP 700 NOM2500A NOM3000	N20 60 NOH300K		
R 60-12-B △	13.0												
R 80-10-B △	10.5	27.0	13.5	23.0	19.0	19.6	14.5	76.28 } 96.3	3/0	NOP 150HA NOM 150		50	
R 80-12-B △	13.0												
R 100-10-B △	10.5	28.5	14.2	24.0	19.0	22.5	16.4	96.3 } 117.2	4/0			50	
R 100-12-B △	13.0												
R 150-10-B △	10.5	36.0	18.0	29.0	27.0	26.6	19.5	117.2 } 152.05	250 } 300 MCM	NOP700 NOM2500A NOM3000	NOH300K	20	
R 150-12-B △	13.0			43.0									
R 150-14-B △	15.0												

NOTE

- 1) △ : UL
- 2) * CB 38-5S-B is Square Ring terminal.
- 3) To crimp by NA 20, need modification of dies holder.
- 4) Check dimensions of washer and stud hole area.
- 5) Refer to page 14 for UL/CSA and proper strip length of wire.