

Bảng thông số sản phẩm

Thông số kỹ thuật



Harmony, Socket, Zelio Relay, RXZ, mixed contact, 29 mm, 4 C/O, 7 A

RXZE2M4N

Main

Range of product	Harmony Electromechanical Relays
Product or component type	Socket
Product compatibility	Plug-in relay RXM with 4 C/O contact
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[Ue] rated operational voltage	< 250 V
Connections - terminals	Connector, 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	27 mm
Net weight	0.056 kg

Environment

Standards	IEC 61984
Product certifications	UL CSA Lloyd's
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

Packing Units

Package 1 Weight	53.000 g
Package 1 Height	30.000 mm

Package 1 width	29.000 mm
Package 1 Length	75.000 mm

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Bảng thông số sản phẩm

Thông số kỹ thuật



Harmony, Socket, Zelio Relay, RXZ, mixed contact, 22.5 mm, 2 C/O, 10 A

RXZE2M2N

Main

Range of product	Harmony Electromechanical Relays
Product or component type	Socket
Product compatibility	Plug-in relay RXM with 2 C/O contact
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[Ue] rated operational voltage	< 250 V
Connections - terminals	Connector, 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	27 mm
Net weight	0.056 kg

Environment

Standards	IEC 61984
Product certifications	Lloyd's UL CSA
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1

Package 1 Weight	37 g
Package 1 Height	30 mm
Package 1 width	22 mm
Package 1 Length	75 mm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	372 g
Package 2 Height	8.5 cm
Package 2 width	6.8 cm
Package 2 Length	11.8 cm
Unit Type of Package 3	S02
Number of Units in Package 3	180
Package 3 Weight	6696 g
Package 3 Height	15 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

REACH Regulation	REACH Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Bảng thông số sản phẩm

Thông số kỹ thuật



Harmony, Socket, for RXM2LB/ RXM4LB relays, 7 A, screw connectors, mixed contact

RXZE1M4C

Main

Range of product	Harmony Electromechanical Relays
Product or component type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM with 4 C/O contact
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[I _{th}] conventional free air thermal current	7 A
[U _e] rated operational voltage	250 V AC conforming to IEC 300 V AC conforming to UL
Connections - terminals	Screw clamp terminals, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 14) flexible with cable end Screw clamp terminals, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) flexible with cable end Screw clamp terminals, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 14) solid without cable end Screw clamp terminals, 2 x 0.2...2 x 1.5 mm ² (AWG 24...AWG 16) solid without cable end
Tightening torque	< 0.8 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	29 mm
Net weight	0.053 kg

Environment

Standards	IEC 61984
Ambient air temperature for storage	-55...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
Package 1 Weight	0.052 kg
Package 1 Height	29 mm
Package 1 width	31 mm
Package 1 Length	75 mm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	0.541 kg
Package 2 Height	6.8 cm
Package 2 width	8 cm
Package 2 Length	14.9 cm
Unit Type of Package 3	S03
Number of Units in Package 3	270
Package 3 Weight	14.9 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile


Contractual warranty

Warranty	18 months
-----------------	-----------

Bảng thông số sản phẩm **RXZE1M4C**


Connections and Schema

Wiring Diagram

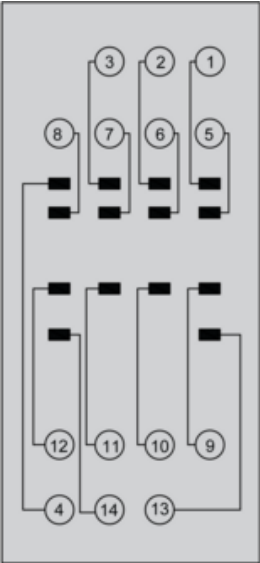

Bảng thông số sản phẩm

Thông số kỹ thuật



Harmony, Socket, for RXM2LB relays, 7 A, screw connectors, mixed contact

RXZE1M2C

Main

Range of product	Harmony Electromechanical Relays
Product or component type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RXM with 2 C/O contact
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[I _{th}] conventional free air thermal current	7 A
[U _e] rated operational voltage	250 V
Connections - terminals	Screw clamp terminals, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 14) flexible with cable end Screw clamp terminals, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) flexible with cable end Screw clamp terminals, 1 x 0.2...1 x 2.5 mm ² (AWG 24...AWG 14) solid without cable end Screw clamp terminals, 2 x 0.2...2 x 1.5 mm ² (AWG 24...AWG 16) solid without cable end
Tightening torque	< 0.8 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	22.5 mm
Net weight	0.034 kg

Environment

Standards	IEC 61984
Ambient air temperature for storage	-55...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

Packing Units

Unit Type of Package 1	PCE
------------------------	-----

Number of Units in Package 1	1
Package 1 Weight	0.03 kg
Package 1 Height	22 mm
Package 1 width	31 mm
Package 1 Length	75 mm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	0.38 kg
Package 2 Height	6.4 cm
Package 2 width	7.9 cm
Package 2 Length	11.2 cm
Unit Type of Package 3	S02
Number of Units in Package 3	180
Package 3 Weight	7.1 kg
Package 3 Height	15 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Contractual warranty

Warranty	18 months
-----------------	-----------

Bảng thông số sản phẩm **RXZE1M2C**

Dimensions Drawings


Dimensions

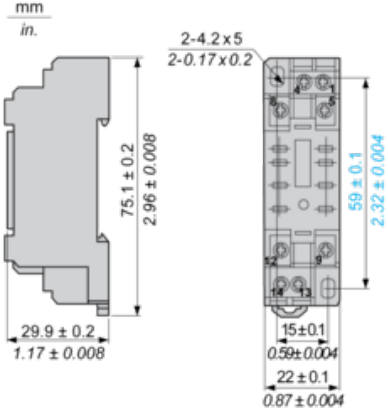

Bảng thông số sản phẩm **RXZE1M2C**

Connections and Schema

Wiring Diagram

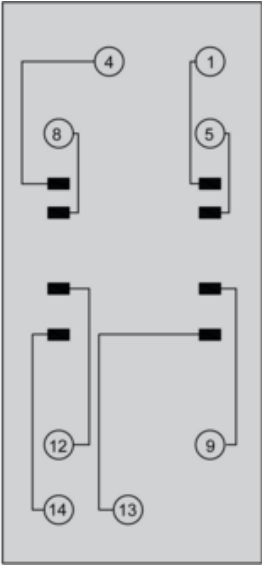

Bảng thông số sản phẩm

Thông số kỹ thuật



Harmony, Socket, for RXM2/RXM4 relays, screw connectors, separate contact

RXZE2S114M

Main

Range of product	Harmony Electromechanical Relays Harmony Timer Relays
Product or component type	Socket
Contact terminal arrangement	Separate
Product compatibility	Plug-in relay RXM with 4 C/O contact Plug-in relay REXL with 4 C/O contact
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[Ith] conventional free air thermal current	10 A
[Ue] rated operational voltage	< 250 V
Connections - terminals	Connector, 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	27 mm
Net weight	0.07 kg

Environment

Standards	IEC 61984
Product certifications	CSA Lloyd's UL
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529

Dielectric strength	2500 V
Packing Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	62.2 g
Package 1 Height	26.79 mm
Package 1 width	28.93 mm
Package 1 Length	82.19 mm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	664.5 g
Package 2 Height	6.6 cm
Package 2 width	11.4 cm
Package 2 Length	13.7 cm
Unit Type of Package 3	S03
Number of Units in Package 3	200
Package 3 Weight	13.2 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile

Contractual warranty


Warranty	18 months
----------	-----------

Bảng thông số sản phẩm **RXZE2S114M**

Dimensions Drawings

Socket

Socket with Separate Contact Terminals and Connector for 4 Timed C/O Contacts

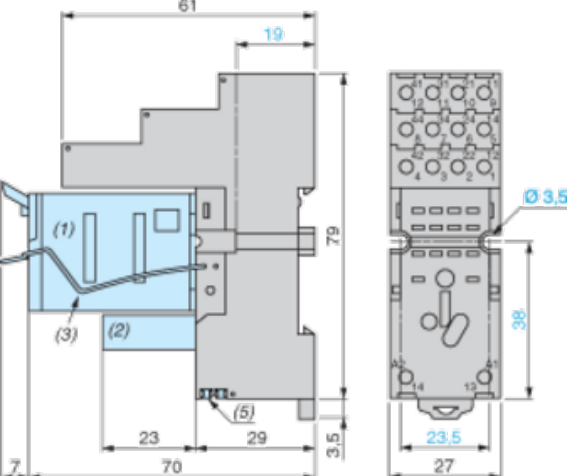

- 1 Relay
- 2 Protection Module
- 3 Carriage Stirrup
- 5 2 Links connection

Bảng thông số sản phẩm

Thông số kỹ thuật



Harmony, Socket, for RXM3 relays, screw connectors, separate contact

RXZE2S111M

Main

Range of product	Harmony Electromechanical Relays
Product or component type	Socket
Contact terminal arrangement	Separate
Product compatibility	Plug-in relay RXM with 3 C/O contact
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[I _{th}] conventional free air thermal current	10 A
[U _e] rated operational voltage	< 250 V
Connections - terminals	Connector, 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	27 mm
Net weight	0.066 kg

Environment

Standards	IEC 61984
Product certifications	UL Lloyd's CSA
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529
Dielectric strength	2500 V

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	61 g
Package 1 Height	27 mm
Package 1 width	61 mm
Package 1 Length	82 mm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	624 g
Package 2 Height	11.6 cm
Package 2 width	6.8 cm
Package 2 Length	14 cm
Unit Type of Package 3	S02
Number of Units in Package 3	200
Package 3 Weight	10.7 kg
Package 3 Height	15 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins


Contractual warranty

Warranty	18 months
----------	-----------

Bảng thông số sản phẩm **RXZE2S11M**

Dimensions Drawings

Dimensions

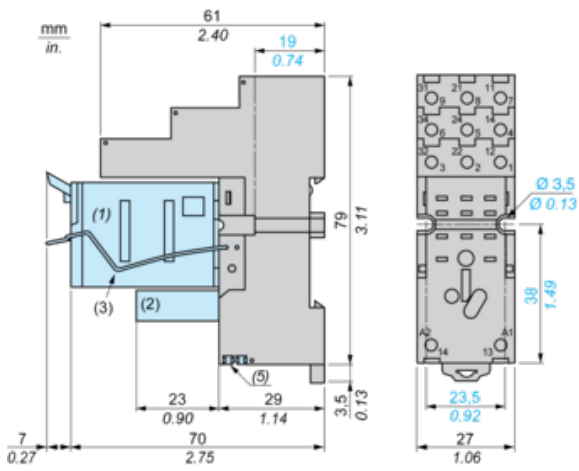


- (1) Relays
- (2) Protection module
- (3) Maintaining clamp
- (4) 2 elongated holes $\varnothing 3.5 \text{ mm} \times 6.5 \text{ mm} / \varnothing 0.13 \text{ in.} \times 0.25 \text{ in.}$
- (5) 2 bus jumpers

Bảng thông số sản phẩm **RXZE2S111M**

Connections and Schema

Wiring Diagram




Symbols shown in blue correspond to Nema marking.

Bảng thông số sản phẩm **RXZE2S11M**

Connections and Schema

Bus Jumpers Mounting on Sockets with Separate Contacts

Example of RXZS2 bus jumper mounting on sockets (view from below)

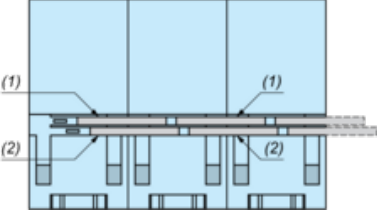

- (1) 2 bus jumpers (polarity A2)
- (2) 2 bus jumpers (polarity A1)

Bảng thông số sản phẩm

Thông số kỹ thuật



socket RXZ - separate contact - 12 A - < 250 V - connector - for relay RXM2..

RXZE2S108M

Main

Range of product	Harmony Electromechanical Relays Harmony Timer Relays
Product or component type	Socket
Contact terminal arrangement	Separate
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay REXL with 2 C/O contact
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[Ith] conventional free air thermal current	12 A
[Ue] rated operational voltage	< 250 V
Connections - terminals	Connector, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end Connector, 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² (AWG 20...AWG 14) solid without cable end
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	27 mm
Net weight	0.058 kg

Environment

Standards	IEC 61984
Product certifications	CSA Lloyd's UL
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529

Dielectric strength	2500 V
Packing Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	50 g
Package 1 Height	27.46 mm
Package 1 width	61.12 mm
Package 1 Length	82.07 mm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	580 g
Package 2 Height	6.6 cm
Package 2 width	11 cm
Package 2 Length	13.9 cm
Unit Type of Package 3	S03
Number of Units in Package 3	200
Package 3 Weight	11.173 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty


Warranty	18 months
----------	-----------

Bảng thông số sản phẩm **RXZE2S108M**

Dimensions Drawings

Socket

Socket with Separate Contact Terminals and Connector for 2 Timed C/O Contacts

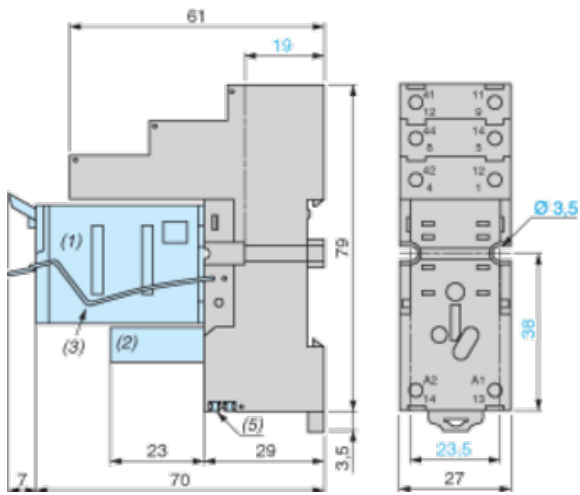

- 1 Relay
- 2 Protection Module
- 3 Carriage Stirrup
- 5 2 Links connection

Bảng thông số sản phẩm

Thông số kỹ thuật



Harmony, Socket, for RXM2/RXM4 relays, screw connectors, mixed contact

RXZE2M114M

Main

Range of product	Harmony Electromechanical Relays Harmony Timer Relays
Product or component type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM with 4 C/O contact
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[Ith] conventional free air thermal current	10 A
[Ue] rated operational voltage	< 250 V
Connections - terminals	Connector, 1 x 0.25...1 x 2.5 mm ² (AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm ² (AWG 20...AWG 14) solid without cable end Connector, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	27 mm
Net weight	0.056 kg

Environment

Standards	IEC 61984
Product certifications	UL CSA Lloyd's
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529

Dielectric strength	2500 V
Packing Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	0.054 kg
Package 1 Height	26.86 mm
Package 1 width	42.45 mm
Package 1 Length	79.18 mm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	0.561 kg
Package 2 Height	7.5 cm
Package 2 width	8.8 cm
Package 2 Length	14 cm
Unit Type of Package 3	S02
Number of Units in Package 3	120
Package 3 Weight	7.281 kg
Package 3 Height	15 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty


Warranty	18 months
----------	-----------

Bảng thông số sản phẩm **RXZE2M114M**

Dimensions Drawings

Socket

Socket with Mixed Contact Terminals and Connector

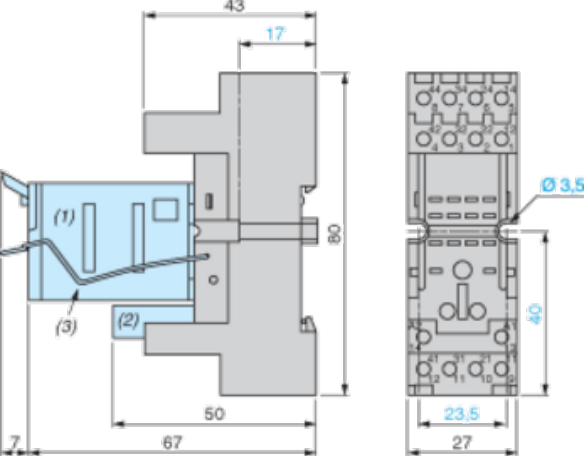

- 1 Relay
- 2 Protection Module
- 3 Carriage Stirrup

Bảng thông số sản phẩm

Thông số kỹ thuật



Harmony, Socket, for RXM2/RXM4 relays, screw clamp terminals, mixed contact

RXZE2M114

Main

Range of product	Harmony Electromechanical Relays Harmony Timer Relays
Product or component type	Socket
Contact terminal arrangement	Mixed
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM with 4 C/O contact
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[I _{th}] conventional free air thermal current	10 A
[U _e] rated operational voltage	< 250 V
Connections - terminals	Screw clamp terminals, 1 x 0.25...1 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Screw clamp terminals, 2 x 0.25...2 x 1 mm ² (AWG 22...AWG 17) flexible with cable end Screw clamp terminals, 1 x 0.5...1 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end Screw clamp terminals, 2 x 0.5...2 x 1.5 mm ² (AWG 20...AWG 16) solid without cable end
Tightening torque	< 1 N.m for M3 screw(s)
Fixing mode	By screw (panel) Clip-on (35 mm symmetrical DIN rail)
Marking	CE
Width	30 mm
Net weight	0.048 kg

Environment

Standards	IEC 61984
Product certifications	UL CSA Lloyd's
Ambient air temperature for storage	-40...85 °C
Ambient air temperature for operation	-40...55 °C
IP degree of protection	IP20 conforming to EN/IEC 60529

Dielectric strength	2500 V
Packing Units	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	52 g
Package 1 Height	38.96 mm
Package 1 width	30.05 mm
Package 1 Length	82.18 mm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	0.621 kg
Package 2 Height	7.4 cm
Package 2 width	8.8 cm
Package 2 Length	15 cm
Unit Type of Package 3	S03
Number of Units in Package 3	200
Package 3 Weight	11.851 kg
Package 3 Height	30 cm
Package 3 width	30 cm
Package 3 Length	40 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty


Warranty	18 months
----------	-----------

Bảng thông số sản phẩm **RXZE2M114**

Dimensions Drawings

Socket

Socket with Mixed Contact Terminals and Clamp Terminals

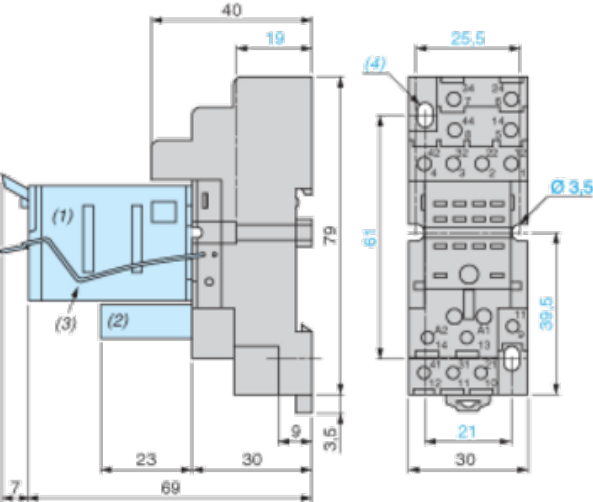

- 1 Relay
- 2 Protection Module
- 3 Carriage Stirrup