S125 series

















Feature of indirect light diffusing system

Qlight's Indirect light diffusing system emits an intense and constant level of signal light via a multi-tiered reflector throughout the lens.


Ø125mm LED Steady/ Flashing Signal Lights


🖺 S125L LED Steady/ Flashing Signal Light

- · Ø125mm LED steady/ flashing signal light
- Shock and vibration-resistant and easy maintenance with long-lasting LED light source
- · Built-in switch for selection between steady and flashing mode
- Built-in buzzer type available(Volume : Max 90dB at 1m)
- Flashing rate: 60-80 flashes/min
- · Material: Lens AS, Housing ABS, Reflector Heat resistant ABS
- Ambient operating temperature : -30°C to +50°C
- Protection rating: IP44
- · Certificates : KIMM, CE Compliant
- · Compliant with RoHS directive

Specifications

Model number	Voltage	Current	Certificates	Weight	Color
S125L	DC12V-24V	Max.0.300A	C€ DC only	0.33kg	R-RedA-AmberG-GreenB-Blue
	AC110V	0.060A		0.51kg	
	AC220V	0.030A		0.51kg	





Wiring Instructions

- External power line standard : UL1015 AWG18(0.75sq)×2C 400mm
- · Product can be wired regardless of polarity

Customization


- · 2 buzzer sound types : Both prolonged (beep, beep) and staccato(beep, beep, beep) buzzer output available
- Wall mount bracket options : Bracket structure allows for threading through the bracket hole or into the wall mount






Wall Mount Bracket SWP125

Wall Mount Bracket SWM125



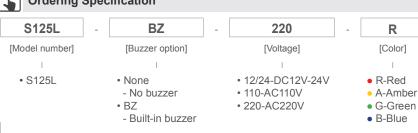



uligntec



Signal & Electric Horn Speakers



Equipment









(Units: mm)



Aviation Obstruction Liahts



Signal Tow



USB/ETN Signal Tower Lights



Wireless Network System







Industrial LED Lights