

SJD series

Stackable Cube Tower Lights with Built-in Alarm



SJD

Common Specifications(SJD/ SJDL/ SJDS)

- Cube-shaped(95×95mm) stacked tower lights and audible alarm combinations
- Lamp can be selectable among bulb revolving, LED steady/flashing, xenon strobe depending on installation environment
- 5 Warning sounds, 5 Melodies, 5 Alarms, and 5 Customizable sounds available
- WV type : Input audio message needs to be provided to us by the customer prior to manufacturing
- Multiple stacked light segments conserves space
- Standard color arrangements are as below :
 - 1 Layer : ● R-Red
 - 2 Layers : ● R-Red ● G-Green
 - 3 Layers : ● R-Red ● A-Amber ● G-Green
- Materials : Lens-AS, Body-ABS, Reflector-Heat resistant ABS
- Protection rating : IP23

SJD Bulb Revolving Cube Tower Light




- Employs a special power transmission system that minimizes noise and wear
- Available in customized color arrangements
- Revolving speed : 120-140RPM
- Ambient operating temperature : -20°C to +50°C

Model number	layer	Voltage	Current	Bulb			Sound Pattern and Volume	Certificates	Weight	Color				
				Spec	Standard	Parts no								
SJD	1	DC12V	0.751A	12V5W	T16x35	15S	• WS-5 warning sounds : 90dB • WM-5 Melodies : 90dB • WA-5 Alarms : 80dB • WV-5 customizable sounds : 80dB	-	DC-1.41kg AC-1.79kg	● R-Red				
		DC24V	0.521A	24V5W	T16x35	15S								
		AC110V	0.164A	12V5W	T16x35	15S								
		AC220V	0.082A	12V5W	T16x35	15S								
	2	DC12V	1.235A	12V5W	T16x35	15S			• WS-5 warning sounds : 90dB • WM-5 Melodies : 90dB • WA-5 Alarms : 80dB • WV-5 customizable sounds : 80dB	-	DC-1.65kg AC-2.04kg	● R-Red ● G-Green		
		DC24V	0.831A	24V5W	T16x35	15S								
		AC110V	0.208A	12V5W	T16x35	15S								
		AC220V	0.104A	12V5W	T16x35	15S								
	3	DC12V	1.720A	12V5W	T16x35	15S					• WS-5 warning sounds : 90dB • WM-5 Melodies : 90dB • WA-5 Alarms : 80dB • WV-5 customizable sounds : 80dB	-	DC-1.90kg AC-2.29kg	● R-Red ● A-Amber ● G-Green
		DC24V	1.141A	24V5W	T16x35	15S								
		AC110V	0.191A	12V5W	T16x35	15S								
		AC220V	0.126A	12V5W	T16x35	15S								

* Please refer to page 24 for detailed information about selectable sound patterns.

Technical Diagram

(Units : mm)

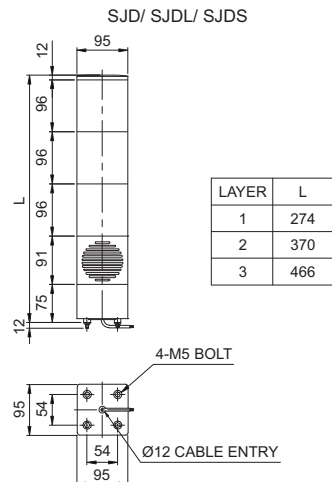

SJD series

Stackable Cube Tower Lights with Built-in Alarm



A variety of pre-recorded sound patterns - warning sounds, melodies and alarms



SJD/ SJDS

! Do not apply a voltage to each signal line. It may cause damage to the product

- SJD type can be wiring with external contact and transistor.
- Wiring to transistor, use the NPN transistor. Please wire properly based on technical diagram.
- Bulb type SJD and xenon lamp type can not be wiring with transistor.
- Please use external contact.

Wiring Instructions

- External power line standard : UL1015 AWG18(0.75sq)×2C 400mm
- External signal line standard : UL1007 AWG22(0.3sq) 400mm
- DC type : Black output line is negative(-)

Customization

- Customized color arrangements available

SJD LED Steady/Flashing Tower Light

- Wide diffusion lens of 96mm height provides a powerful LED signal light
- Built-in switches for steady/flashing mode
- Flashing rate : 60-80 flashes/min
- Ambient operating temperature : -30°C to +50°C

Model number	Layer	Voltage	Current	Sound Pattern and Volume	Certificates	Weight	Color		
SJD	1	DC12V	Max.	<ul style="list-style-type: none"> • WS-5 Warning sounds : 90dB • WM-5 Melodies : 90dB • WA-5 Alarms : 85dB • WV- 5 Customizable sounds : 80dB 	-	DC-1.63kg AC-1.63kg	● R-Red		
		-24V	0.340A						
		AC110V	0.125A						
	2	DC12V	Max.			-	-	DC-1.80kg AC-1.80kg	● R-Red ● G-Green
		-24V	0.490A						
		AC110V	0.140A						
	3	DC12V	Max.			-	-	DC-2.04kg AC-2.04kg	● R-Red ● A-Amber ● G-Green
		-24V	0.600A						
		AC110V	0.155A						
		AC220V	0.080A						

* Please refer to page 24 for detailed information about selectable sound patterns.

SJDS Xenon Lamp Strobe Tower Light


- Diffusion strong light offers long distance transmission of signal light
- Lamp connector fastening structure allows for convenient lamp replacement
- Flashing rate : 60-80 flashes/min
- Ambient operating temperature : -30°C to +50°C

Model number	Layer	Voltage	Current	Sound Pattern and Volume	Certificates	Weight	Color		
SJDS	1	DC12V	Max.	<ul style="list-style-type: none"> • WS-5 Warning sounds : 90dB • WM-5 Melodies : 90dB • WA-5 Alarms : 85dB • WV- 5 Customizable sounds : 80dB 	-	DC-1.25kg AC-1.66kg	● R-Red		
		-24V	0.990A						
		AC110V	0.195A						
	2	DC12V	Max.			-	-	DC-1.45kg AC-1.84kg	● R-Red ● G-Green
		-24V	1.170A						
		AC110V	0.330A						
	3	DC12V	Max.			-	-	DC-1.64kg AC-2.03kg	● R-Red ● A-Amber ● G-Green
		-24V	2.435A						
		AC110V	0.465A						
		AC220V	0.350A						


* Please refer to page 24 for detailed information about selectable sound patterns.

Wiring Instructions

SJD/ SJDL/ SJDS-DC/AC

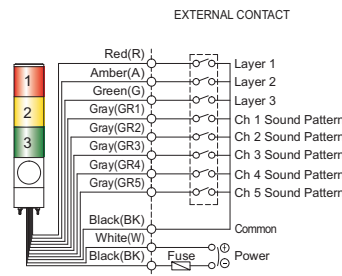

SJD/DC/AC

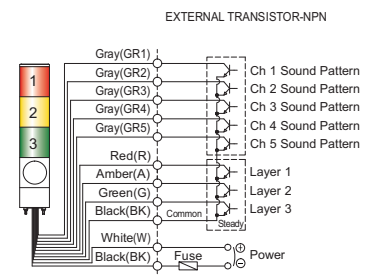

Ordering Specification

SJD	WA	3	220	RAG
[Model number]	[Sound selection]	[Layer]	[Voltage]	[Color]
<ul style="list-style-type: none"> • SJD • SJDL • SJDS 	<ul style="list-style-type: none"> • WS-Warning • WM-Melody • WA-Alarm • WV-Customizable sound 	<ul style="list-style-type: none"> • 1-1Layer • 2-2Layers • 3-3Layers 	<ul style="list-style-type: none"> • 12-DC12V • 24-DC24V • 12/24-DC12V-24V (SJD, SJDS only) • 110-AC110V • 220-AC220V 	<ul style="list-style-type: none"> ● R-Red ● A-Amber ● G-Green