


VDE Insulated Open End Wrenches



- VDE Certified
- For use in high voltage areas, up to 1000V alternating current
- Sleek head design enables access to tight spots where a ratchet will not fit
- Large markings offer easy size identification
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Insulated to IEC 60900 / in accordance to DIN 7446 / ISO 7738

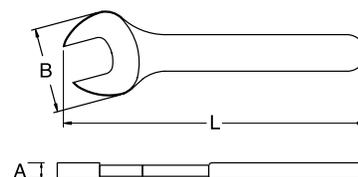

Article Code	Size	Length L (mm)	Width B (mm)	Height A (mm)	
ST41306SC	6.0 mm	90.0	22.0	7.3	6
ST41307SC	7.0 mm	90.0	24.0	7.3	6
ST41308SC	8.0 mm	100.0	25.0	7.5	6
ST41309SC	9.0 mm	100.0	28.0	7.8	6
ST41310SC	10.0 mm	110.0	29.0	8.0	6
ST41311SC	11.0 mm	110.0	31.0	8.5	6
ST41312SC	12.0 mm	130.0	33.0	8.5	6
ST41313SC	13.0 mm	135.0	35.0	10.5	6
ST41314SC	14.0 mm	145.0	36.0	10.5	6
ST41315SC	15.0 mm	150.0	42.0	11.5	6
ST41316SC	16.0 mm	160.0	43.0	11.5	6
ST41317SC	17.0 mm	160.0	44.0	12.2	6
ST41318SC	18.0 mm	175.0	45.0	12.2	6
ST41319SC	19.0 mm	175.0	48.0	12.2	6
ST41321SC	21.0 mm	195.0	50.0	12.5	6
ST41322SC	22.0 mm	195.0	54.0	13.0	6
ST41324SC	24.0 mm	225.0	56.0	13.5	6