



Please scan
the QR code
to view details.



STE series (Ø25)

Ø25 modular signal towers with steady light features



h Suffix code


Category	Code				Description
STE	□	- □	- □	□	Signal Tower
Features	025				Ø25 Circumferential
Power voltage		D51			24 V d.c. (LED light source)
Number of stacks			1		1-stack (Red)
			2		2-stack (Red, Green)
			3		3-stack (Red, Yellow, Green)
Mount option			S		Body color: Chrome-plated
			N		Body color: Ivory

* L-shaped mount sold separately


h Specifications

Category	Description	
Features	Steady lights only	
Power voltage	24 V d.c.	
Body material/color	ABS/Chrome-plated & Ivory	
Lens color	Red, Yellow, Green	
Circumference	Ø25	
Maximum number of stacks	3 stacks	
Vibration resistance	0.75 mm, 10 - 55 Hz	
Storage temperature	-20 to 70 °C	
Cable specifications	AWG22	
Certification	(EN 61000-6-4, EN 61000-6-2)	
Maximum current consumption ±20%	Red	29 mA
	Yellow	26 mA
	Green	6 mA
Ambient temperature/humidity	-15 to 49 °C, 45 to 85% RH	

h Connection diagram

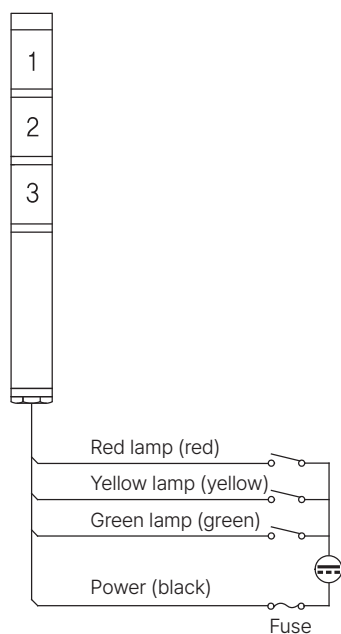

h Installation method

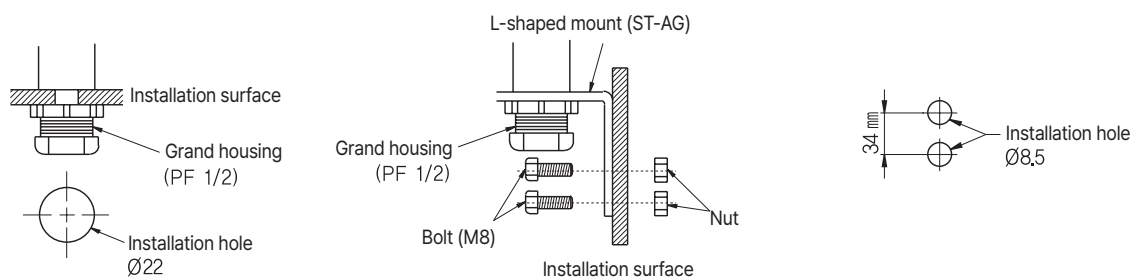

* The thickness of panels should be $t=10$ mm or less.