


INSULATED BUTT CONNECTORS (B TYPE) TGN TMN : Nylon

SEAMLESS BUTT

■ TGN (NON FLARE)

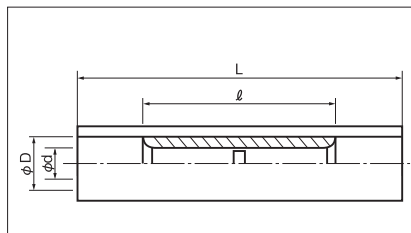



RoHS 10
See page 2

RoHS 10
See page 2

Non stock item / Please contact us for minimum order quantities and lead time.

PART NUMBER	DIMENSIONS mm				WIRE RANGE		TOOL No.		STD COLOR	STD QTY/BOX
	φd	φD	L	ℓ	STRANDED mm ²	AWG	HAND TOOL No.			
							TOOL BODY No.	DIES No.		
TGN B-1.25 ◇	1.8	3.2	25.5	15.0	0.5~1.65	20-16	NA 10 NA 3	NH 11 NH 32 N10 11 N3 11	RED TRANSLUCENT	1,000 (100×10)
TGN B-2 ◇	2.3	3.9	25.5	15.0	1.04~2.63	16-14	NA 10 NA 3	NH 12 NH 32 N10 12 N3 12	BLUE TRANSLUCENT	
TGN B-5.5 ◇	3.5	5.4	27.5	15.0	2.63~6.64	12-10	NA 10 NA 3	NH 13 N10 13 N3 13	YELLOW TRANSLUCENT	500 (100×5)

■ TMN (FLARED)

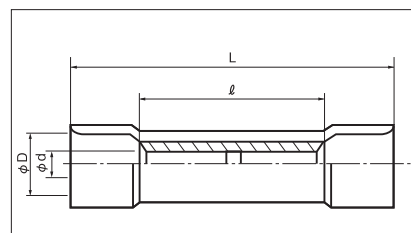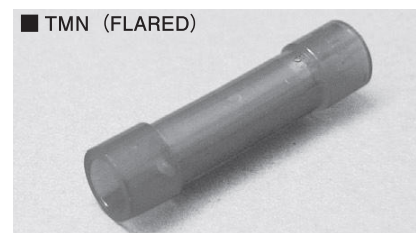

RoHS 10
See page 2

RoHS 10
See page 2

Non stock item / Please contact us for minimum order quantities and lead time.


PART NUMBER		DIMENSIONS mm				WIRE RANGE		TOOL No.		STD COLOR	STD QTY/BOX
		φd	φD	L	ℓ	STRANDED mm²	AWG	HAND TOOL No.			
								TOOL BODY No.	DIES No.		
TMN B-1.25	◇	1.8	3.8	25.5	15.0	0.5~1.65	20~16	NA 10 NA 3	NH 11 NH 32 N10 11 N3 11	RED TRANSLUCENT	1,000 (100×10)
TMN B-2	◇	2.3	4.5	25.5	15.0	1.04~2.63	16-14	NA 10 NA 3	NH 12 NH 32 N10 12 N3 12	BLUE TRANSLUCENT	
TMN B-5.5	◇	3.5	6.4	27.5	15.0	2.63~6.64	12-10	NA 10 NA 3	NH 13 N10 13 N3 13	YELLOW TRANSLUCENT	500 (100×5)

NOTE 1) ◇ : CSA

2) Refer to page 41 for UL/CSA, insulator material/color, proper strip length of wire and Nylon insulated products.

ENVIRONMENTALLY FRIENDLY INSULATED BUTT CONNECTORS

Polycarbonate

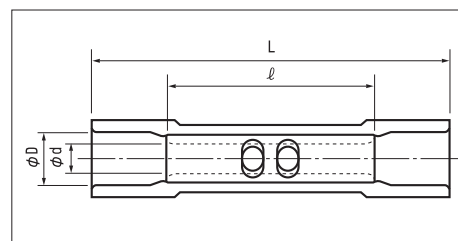

RoHS 10
See page 2

PART NUMBER	DIMENSIONS mm				WIRE RANGE		TOOL No.		STD COLOR	STD QTY/BOX
	ϕd	ϕD	L	ℓ	STRANDED mm ²	AWG	HAND TOOL No.			
							TOOL BODY No.	DIES No.		
TMX BP-1.25	1.7	3.8	25.5	15.0	0.5~1.65	20-16	NA 10 NA 3	NH 11 NH 32 N10 11 N3 11	RED TRANSLUCENT	1,000 (100×10)
TMX BP-2	2.3	4.5	25.5	15.0	1.04~2.63	16-14	NA 10 NA 3	NH 12 NH 32 N10 12 N3 12	BLUE TRANSLUCENT	

NOTE 1) Refer to page 41 for UL/CSA, insulator material, proper strip length of wire.