


INSULATED PIN TERMINALS (TC TYPE) **TMENTM** : Nylon **TGNTM**

■ TGT Pin is in line with the center of the barrel.


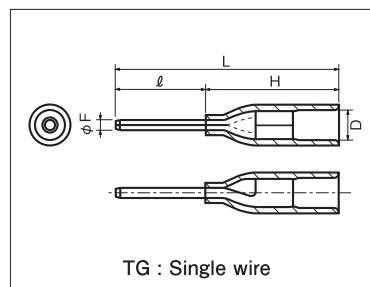


RoHS 10

See page 2

Rated voltage 300V Rated current 17A

PART NUMBER	DIMENSIONS mm					WIRE RANGE		TOOL No.		STD COLOR	STD QTY/BOX
	ϕ F	ℓ	L	H	D	STRANDED mm ²	AWG	HAND TOOL No.			
								TOOL BODY No.	DIES No.		
TGN TC-1.25-9T	1.1	9.0	25.0	16.0	ϕ 3.6	0.3~1.65	22-16	(NH 11 / NH 32) NH 65B		TRANSPARENT	1,000 (100×10)
TGN TC-1.25-11T		11.0	27.0					NA 3 NA 10	N3 11T N10 11		

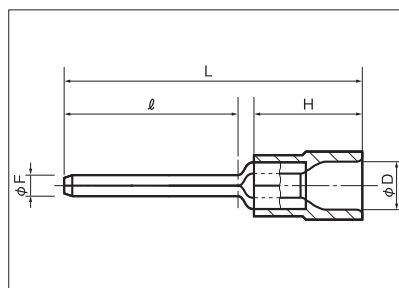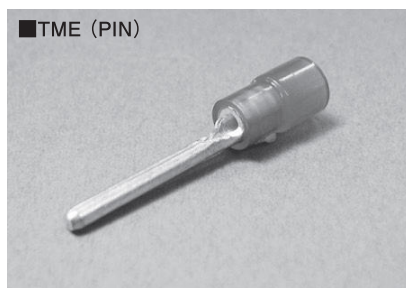

RoHS 10

See page 2

RoHS 10

Yellow Nylon
See page 2

Non stock item / Please contact us for minimum order quantities and lead time.

PART NUMBER	DIMENSIONS mm					WIRE RANGE		TOOL No.		STD COLOR	STD QTY/BOX
	φF	ℓ	L	H	φD	STRANDED mm²	AWG	HAND TOOL No.			
								TOOL BODY No.	DIES No.		
TMEN TC-0.3-9.5 ○	1.0	9.5	20.8	10.0	2.8	0.2~0.5 0.3~0.5 UL・CSA USE	24-20 22-20 UL・CSA USE	NH 5 NH 32 NA 10 NA 3		YELLOW TRANSLUCENT	1,000 (100×10)
TMEN TC-1.25-11 ○	1.9	11.0	23.0	10.0	4.1	0.3 ∟ 1.65	22-16	NH 11 NH 32 NA 10 NA 3		RED TRANSLUCENT	1,000 (100×10)
TMEN TC-1.25-11S ○	1.5										
TMEN TC-1.25-16 ○	1.9	16.0	27.5								
TMEN TC-1.25-16S ○	1.5										
TMEN TC-1.25-20 ○	1.9	20.0	31.5					NA 10 NA 3		N10 11 N3 11	
TMEN TC-1.25-20S ○	1.5										
TMEN TC-2-11 ○	1.9	11.0	23.0	10.0	4.6	1.04 ∟ 2.63	16-14	NH 12 NH 32 NA 10 NA 3		BLUE TRANSLUCENT	1,000 (100×10)
TMEN TC-2-11S ○	1.5										
TMEN TC-2-16 ○	1.9	16.0	27.5								
TMEN TC-2-16S ○	1.5										
TMEN TC-2-20 ○	1.9	20.0	31.5					NA 10 NA 3		N10 12 N3 12	
TMEN TC-2-20S ○	1.5										
TMEN TC-3.5-11S ○	1.9	11.0	29.0	14.0	6.3	2.63 ∟ 4.6	12	NH 13 NA 10 NA 3		YELLOW TRANSLUCENT	100
TMEN TC-5.5-11 ○	2.7	11.0	28.5	14.0	6.8	2.63 ∟ 6.64	12-10	NH 13 NA 10 NA 3		YELLOW TRANSLUCENT	100

NOTE 1) ○ : UL/CSA △ : UL

2) Please refer to page 41 for UL/CSA, insulator material/color, proper strip length of wire and Nylon insulated products.