
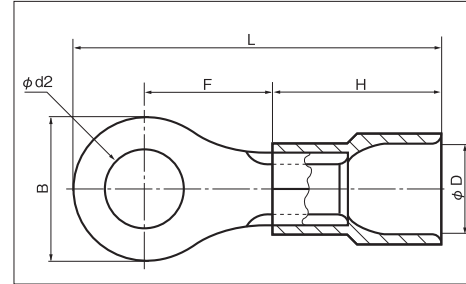


INSULATED RING TERMINALS (R TYPE) TMEN : Nylon

JIS C 2805

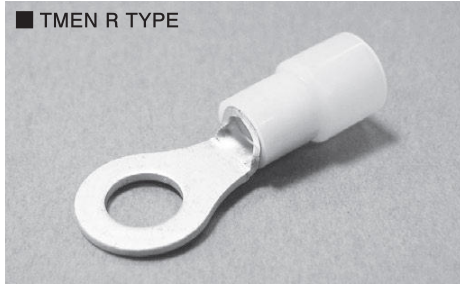

RoHS10
Yellow Nylon
See page 2

Non stock item / Please contact us for minimum order quantities and lead time.

PART NUMBER	DIMENSIONS mm						WIRE RANGE		TOOL No.		STD COLOR	STD QTY/BOX			
	φd2	B	L	F	H	φD	STRANDED mm ²	AWG	HAND TOOL No.						
									TOOL BODY No.	DIES No.					
TMEN 3.5-4 ○	4.3	8.0	26.0	8.0	14.0	6.3	2.63 } 4.6	12	NH 13		YELLOW TRANSLUCENT	100			
TMEN 3.5-5S ○	5.3	9.6	28.0	9.2					NA 10	N10 13					
TMEN 3.5-5L ○		12.0	29.4	9.4											
TMEN 3.5-6L ○	6.4								NA 3	N3 13					
TMEN 3.5-8 ○	8.4	13.5	33.5	12.7											
TMEN 5.5-3M ※ ○	3.2	6.5	24.4	7.2	14.0	6.8	2.63 } 6.64	12-10	NH 13		YELLOW TRANSLUCENT	100			
TMEN 5.5-3N ※ ○		7.0	24.7												
TMEN 5.5-3S ※ ○		9.0	25.7												
TMEN 5.5-3.5N ※ ○	7.0	24.7													
TMEN 5.5-3.5S ※ ○	3.7	9.0	25.7												
TMEN 5.5-3.5 ○		9.5	27.0	8.2											
TMEN 5.5-4N ※ ○	4.3	7.0	24.7	7.2											
TMEN 5.5-4S ※ ○		9.0	25.7												
TMEN 5.5-4 (RBC 5.5-4) ●		9.5	27.0	8.2											
TMEN 5.5-5N ※ ○	5.3	8.0	25.2	7.2											
TMEN 5.5-5S ※ ○		9.0	25.7												
TMEN 5.5-5 (RBC 5.5-5) ●		9.5	27.0	8.2											
TMEN 5.5-6 (RBC 5.5-6) ●	6.4	12.0	30.5	10.5											
TMEN 5.5-8 (RBC 5.5-8) ●	8.4	15.0	35.5	14.0											
TMEN 5.5-10 (RBC 5.5-10) ●	10.5														
TMEN 5.5-12 ○	13.0	19.2	40.0	16.4									NA 10	N10 13	50
TMEN 5.5-14 ○	15.0												NA 3	N3 13	

NOTE

- 1) ● : JIS/UL/CSA ○ : UL/CSA
- 2) Refer to page 41 for UL/CSA, insulator material/color, proper strip length of wire and Nylon insulated products.
- 3) JIS part No. is shown in parenthesis.
- 4) ※Specification is partly different from other ring terminals.