


1.1 Single row deep groove ball bearings

d 60 – 65 mm

1.1

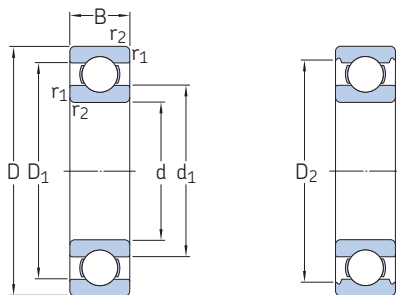

2Z



2RZ



2RS1




2RSH

Principal dimensions			Basic load ratings		Fatigue load limit	Speed ratings		Mass	Designations	
d	D	B	C	C ₀	P _u	Reference speed	Limiting speed ¹⁾		Bearing open or capped on both sides	capped on one side ¹⁾
mm			kN		kN	r/min		kg	–	
60	78	10	11,9	11,4	0,49	–	4 800	0,11	► 61812-2RS1	–
	78	10	11,9	11,4	0,49	17 000	8 500	0,11	► 61812-2RZ	–
	78	10	11,9	11,4	0,49	17 000	11 000	0,11	► 61812	–
	85	13	16,5	12	0,6	–	4 500	0,21	► 61912-2RS1	–
	85	13	16,5	12	0,6	16 000	10 000	0,2	► 61912	–
	85	13	16,5	14,3	0,6	16 000	8 000	0,2	61912-2RZ	–
	95	11	20,8	15	0,735	15 000	9 500	0,29	► 16012	–
	95	18	30,7	23,2	0,98	15 000	9 500	0,41	► 6012	–
	95	18	30,7	23,2	0,98	–	4 300	0,43	► 6012-2RS1	6012-RS1
	95	18	30,7	23,2	0,98	15 000	7 500	0,43	6012-2RZ	6012-RZ
	95	18	30,7	23,2	0,98	15 000	7 500	0,43	► 6012-2Z	6012-Z
	110	22	55,3	36	1,53	13 000	8 000	0,78	► 6212	–
	110	22	55,3	36	1,53	13 000	8 000	0,93	6212 M	–
	110	22	55,3	36	1,53	–	4 000	0,79	► 6212-2RSH	► 6212-RSH
	110	22	55,3	36	1,53	13 000	6 300	0,81	► 6212-2Z	6212-Z
	110	28	52,7	36	1,53	–	4 000	1	62212-2RS1	–
	130	31	85,2	52	2,2	11 000	7 000	2,1	6312 M	–
	130	31	85,2	52	2,2	–	3 400	1,75	► 6312-2RSH	► 6312-RSH
	130	31	85,2	52	2,2	11 000	5 600	1,8	► 6312-2Z	6312-Z
	130	31	85,2	52	2,2	11 000	7 000	1,7	► 6312	–
	130	46	81,9	52	2,2	–	3 400	2,55	62312-2RS1	–
65	150	35	108	69,5	2,9	10 000	6 300	2,85	6412	–
	85	10	12,4	12,7	0,54	–	4 500	0,13	► 61813-2RS1	–
	85	10	12,4	12,7	0,54	16 000	8 000	0,13	► 61813-2RZ	–
	85	10	12,4	12,7	0,54	16 000	10 000	0,13	► 61813	–
	90	13	17,4	16	0,68	–	4 300	0,22	► 61913-2RS1	–
	90	13	17,4	16	0,68	15 000	7 500	0,22	61913-2RZ	–
	90	13	17,4	16	0,68	15 000	9 500	0,22	► 61913	–
	100	11	22,5	19,6	0,83	14 000	9 000	0,3	► 16013	–
	100	18	31,9	25	1,06	14 000	9 000	0,44	► 6013	–
	100	18	31,9	25	1,06	14 000	12 000	0,44	6013 M	–
	100	18	31,9	25	1,06	–	4 000	0,45	► 6013-2RS1	6013-RS1
	100	18	31,9	25	1,06	14 000	7 000	0,46	► 6013-2Z	6013-Z
	120	23	58,5	40,5	1,73	12 000	10 000	1,2	6213 M	–

SKF Explorer bearing

► Popular item

¹⁾ For bearings with only one shield or one non-contact seal (Z, RZ) the limiting speeds of the open bearings are valid.

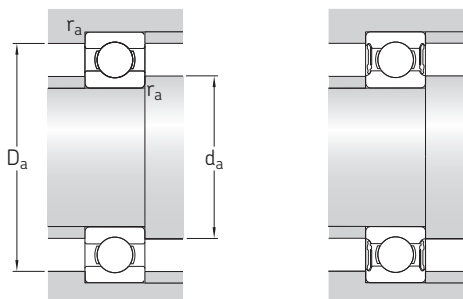

Dimensions						Abutment and fillet dimensions				Calculation factors	
d	d ₁ ≈	d ₂ ≈	D ₁ ≈	D ₂ ≈	r _{1,2} min.	d _a min.	d _a max.	D _a max.	r _a max.	k _r	f ₀
mm						mm				–	
60	65,4	–	–	74,5	0,3	62	65	76	0,3	0,015	17
	65,4	–	–	74,5	0,3	62	65	76	0,3	0,015	17
	65,4	–	72,9	–	0,3	62	–	76	0,3	0,015	17
	68,3	–	–	78,7	1	65	68	80	1	0,02	14
	68,3	–	–	78,7	1	65	–	80	1	0,02	14
	68,3	–	–	78,7	1	65	68	80	1	0,02	16
	72	–	83	–	0,6	64	–	91	0,6	0,02	14
	71,3	–	–	86,5	1,1	66	–	89	1	0,025	16
	71,3	–	–	86,5	1,1	66	71	89	1	0,025	16
	71,3	–	–	86,5	1,1	66	71	89	1	0,025	16
	71,3	–	–	86,5	1,1	66	71	89	1	0,025	16
	75,5	–	–	98	1,5	69	–	101	1,5	0,025	14
	75,5	–	–	98	1,5	69	–	101	1,5	0,025	14
	–	71,5	–	99,5	1,5	69	71	101	1,5	0,025	14
	75,5	–	–	98	1,5	69	75	101	1,5	0,025	14
	75,5	–	–	98	1,5	69	75	101	1,5	0,025	14
	81,8	–	–	113	2,1	72	–	118	2	0,03	13
	–	77,5	–	113	2,1	72	77	118	2	0,03	13
	81,8	–	–	113	2,1	72	81	118	2	0,03	13
	81,8	–	–	113	2,1	72	–	118	2	0,03	13
	81,8	–	–	113	2,1	72	81	118	2	0,03	13
	88,1	–	122	–	2,1	74	–	136	2	0,035	12
65	71,4	–	–	80,5	0,6	69	71	81	0,6	0,015	17
	71,4	–	–	80,5	0,6	69	71	81	0,6	0,015	17
	71,4	–	78,9	–	0,6	69	–	81	0,6	0,015	17
	73	–	–	84,2	1	70	73	85	1	0,02	17
	73	–	–	84,2	1	70	73	85	1	0,02	17
	73	–	82,3	–	1	70	–	85	1	0,02	17
	76,5	–	88,4	–	0,6	69	–	96	0,6	0,02	16
	76,3	–	–	91,5	1,1	71	–	94	1	0,025	16
	76,3	–	–	91,5	1,1	71	–	94	1	0,025	16
	76,3	–	–	91,5	1,1	71	76	94	1	0,025	16
	76,3	–	–	91,5	1,1	71	76	94	1	0,025	16
	83,3	–	–	106	1,5	74	–	111	1,5	0,025	15