



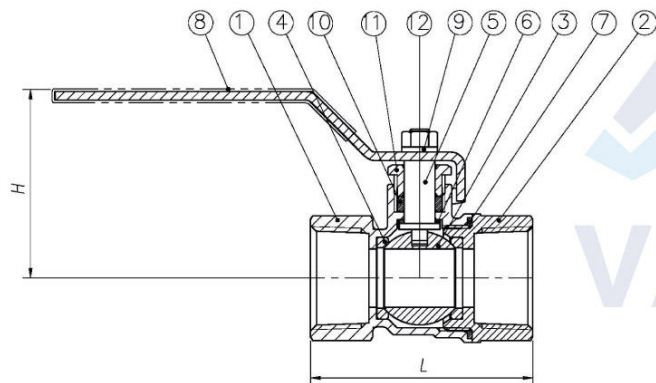

WONIL VALVE

VAN BI REN STAINLESS BALL VALVE (SCREWED TYPE)

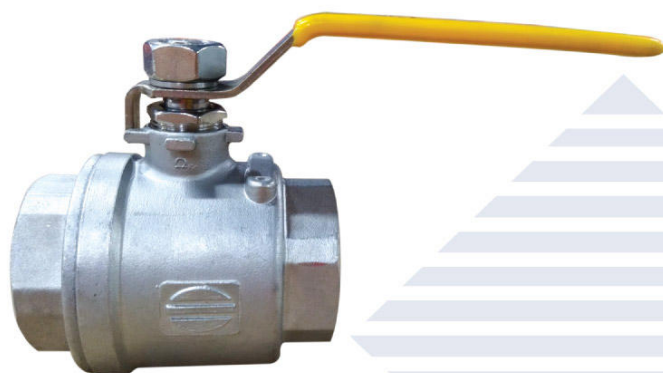

MODEL	WSB-20S	
Applicable fluid	Water	
Maximum applicable pressure	≤ 1.96MPa	
Maximum operating temperature	5°C ~ 180°C	
Connection method	KS 10K Screwed	
Internal pressure test	2.94 MPa at water pressure	
Material	BODY	SCS13
	TRIM	STS304 / TEFLON

STAINLESS BALL VALVE (Screwed type) Model: WSB-20S

Vận hành: Tay Gạt

Type: Lever

Môi trường sử dụng: Hóa chất, Nước thải công nghiệp, Nước sạch

Application: A Chemical, Industrial Water, Drinking water

Nhiệt độ: Lớn nhất 180 độ C

Application Temperature: Max 180

Áp lực lớn nhất: 2,94 Mpa

Hydraulic Testing: 2,94 Mpa at Water Pressure

Chất liệu Thân: Inox 304 (Tùy chọn 316L)

Material Body: SCS13 (Order: SCS14)

Chất liệu bi van, lớp lót: Inox 304/ TEFLON

Material Trim: TEFLON/STS304

Kết nối: Ren

Connection: KS 10K Screwed

Thương hiệu: Wonil

Brand Name: Wonil

Xuất xứ: Hàn Quốc

Place of Origin: Korea

Bảo hành: 24 tháng/ Warranty: 24 months

PART NAME	No.	MAT'L
BODY	1	SCS13
END CAP	2	SCS13
BALL	3	STS304
STEM	4	PTFE
BOLT NUT	5	STS304
SEAT	6	PTFE
THRUST WASHER	7	PTFE
HANDLE	8	STS304
SPRING WASHER	9	STS304
STEM NUT	10	PTFE
SPRING WASHER	11	STS304
GLAND NUT	12	STS304

Model	WSB-20S					
SIZE	15A	20A	25A	32A	40A	50A
L	48.5	57	68	79	88.5	100.5
H	46	49	57	66	74	80

* Made to order for operating pressure 20K