


# Bảng thông số sản phẩm

Thông số kỹ thuật

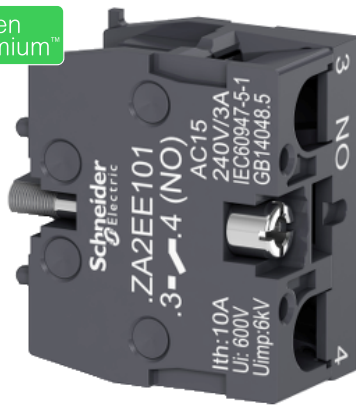

## Easy Harmony XA2E, Single contact block for head Ø22, 1 NO

ZA2EE101

### Main

Range of product	Easy Harmony XA2
Product or component type	Contact block
Device short name	ZA2E

### Complementary

Contacts type and composition	1 NO
Contact operation	Slow-break
Contact block type	Single
Contacts usage	Standard contacts
Positive opening	Without
Mechanical durability	1500000 cycles
Connections - terminals	, <= 2 x 1.5 mm <sup>2</sup> conforming to EN 60947-1 , <= 1 x 2.5 mm <sup>2</sup> conforming to EN 60947-1 , >= 1 x 0.5 mm <sup>2</sup> conforming to EN 60947-1 Faston terminals, connection size: 6.3 mm conforming to EN 60947-1
Tightening torque	0.8 N.m
Contacts material	Silver alloy (Ag/Ni)
Short-circuit protection	10 A fuse type gL conforming to IEC 60269-1
[Ith] conventional free air thermal current	10 A conforming to EN/IEC 60947-5-1
[Ui] rated insulation voltage	600 V (pollution degree 3) conforming to EN 60947-1
[Uimp] rated impulse withstand voltage	6 kV conforming to EN 60947-1
[Ie] rated operational current	2 A at 230 V, AC-15, A600 conforming to IEC 60947-5-1 0.2 A at 110 V, DC-13, Q600 conforming to IEC 60947-5-1
Electrical durability	500000 cycles, AC-15, 2 A at 230 V, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 500000 cycles, DC-13, 0.2 A at 110 V, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1

### Environment

Protective treatment	TC
Ambient air temperature for storage	-40...70 °C

<b>Ambient air temperature for operation</b>	-25...55 °C
<b>IP degree of protection</b>	IP20 conforming to IEC 60529
<b>Standards</b>	EN/IEC 60947-1 EN/IEC 60947-5-4 IEC 60529 EN/IEC 60947-5-1
<b>Product certifications</b>	CE CCC

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Weight</b>	0.014 kg
<b>Package 1 Height</b>	15.02 mm
<b>Package 1 width</b>	29.38 mm
<b>Package 1 Length</b>	31.37 mm
<b>Unit Type of Package 2</b>	S02
<b>Number of Units in Package 2</b>	200
<b>Package 2 Weight</b>	3481 g
<b>Package 2 Height</b>	15 cm
<b>Package 2 width</b>	30 cm
<b>Package 2 Length</b>	40 cm
<b>Unit Type of Package 3</b>	PAL
<b>Number of Units in Package 3</b>	4000
<b>Package 3 Weight</b>	66400 g
<b>Package 3 Height</b>	600 mm
<b>Package 3 width</b>	800 mm
<b>Package 3 Length</b>	900 mm

## Offer Sustainability

<b>Sustainable offer status</b>	Green Premium product
<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
<b>REACH free of SVHC</b>	Yes
<b>EU RoHS Directive</b>	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
<b>Toxic heavy metal free</b>	Yes
<b>Mercury free</b>	Yes
<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a>
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
<b>Circularity Profile</b>	<a href="#">End of Life Information</a>
<b>WEEE</b>	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

# Bảng thông số sản phẩm

Thông số kỹ thuật



## Easy Harmony XA2E, Single contact block for head Ø22, 1 NC

ZA2EE102

### Main

Range of product	Easy Harmony XA2
Product or component type	Contact block
Device short name	ZA2E

### Complementary

Contacts type and composition	1 NC
Contact operation	Slow-break
Contact block type	Single
Contacts usage	Standard contacts
Positive opening	Without
Mechanical durability	1500000 cycles
Connections - terminals	, <= 2 x 1.5 mm <sup>2</sup> conforming to EN 60947-1 , <= 1 x 2.5 mm <sup>2</sup> conforming to EN 60947-1 , >= 1 x 0.5 mm <sup>2</sup> conforming to EN 60947-1 Faston terminals, connection size: 6.3 mm conforming to EN 60947-1
Tightening torque	0.8 N.m
Contacts material	Silver alloy (Ag/Ni)
Short-circuit protection	10 A fuse type gL conforming to IEC 60269-1
[I <sub>th</sub> ] conventional free air thermal current	10 A conforming to EN/IEC 60947-5-1
[U <sub>i</sub> ] rated insulation voltage	600 V (pollution degree 3) conforming to EN 60947-1
[U <sub>imp</sub> ] rated impulse withstand voltage	6 kV conforming to EN 60947-1
[I <sub>e</sub> ] rated operational current	2 A at 230 V, AC-15, A600 conforming to IEC 60947-5-1 0.2 A at 110 V, DC-13, Q600 conforming to IEC 60947-5-1
Electrical durability	500000 cycles, AC-15, 2 A at 230 V, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1 500000 cycles, DC-13, 0.2 A at 110 V, operating rate <60 cyc/mn, load factor: 0.5 conforming to IEC 60947-5-1

### Environment

Protective treatment	TC
Ambient air temperature for storage	-40...70 °C

<b>Ambient air temperature for operation</b>	-25...55 °C
<b>IP degree of protection</b>	IP20 conforming to IEC 60529
<b>Standards</b>	EN/IEC 60947-1 IEC 60529 EN/IEC 60947-5-4 EN/IEC 60947-5-1
<b>Product certifications</b>	CCC CE

## Packing Units

<b>Unit Type of Package 1</b>	PCE
<b>Number of Units in Package 1</b>	1
<b>Package 1 Weight</b>	19 g
<b>Package 1 Height</b>	3 cm
<b>Package 1 width</b>	11 cm
<b>Package 1 Length</b>	16 cm
<b>Unit Type of Package 2</b>	BB2
<b>Number of Units in Package 2</b>	5
<b>Package 2 Weight</b>	80 g
<b>Package 2 Height</b>	5.2 cm
<b>Package 2 width</b>	19.1 cm
<b>Package 2 Length</b>	17 cm
<b>Unit Type of Package 3</b>	BB1
<b>Number of Units in Package 3</b>	5
<b>Package 3 Weight</b>	80 g
<b>Package 3 Height</b>	5.2 cm
<b>Package 3 width</b>	19.1 cm
<b>Package 3 Length</b>	17 cm

## Offer Sustainability

<b>Sustainable offer status</b>	Green Premium product
<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
<b>REACH free of SVHC</b>	Yes
<b>EU RoHS Directive</b>	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
<b>Toxic heavy metal free</b>	Yes
<b>Mercury free</b>	Yes
<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a>
<b>Environmental Disclosure</b>	<a href="#">Product Environmental Profile</a>
<b>Circularity Profile</b>	<a href="#">End of Life Information</a>
<b>WEEE</b>	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins