

05 CBP Series Swimming Training Pumps

CBP SWIMMING TRAINING PUMPS



- Liquid temperature : 5~50°C / 41~122°F
- HP range : 3HP / 2.2KW
- PH : 6~8
- Rated Speed : 2900 / 3450 rpm
- Protection class : IP55
- Maximum working pressure : 3Kg/cm² / 42.6PSI

Features

1. The pump casing and impeller is stainless steel and engineering plastic. No rusty issue.
2. 4" inlet and outlet, high efficiency flow channel design.

Applications


1. Aquaculture circulation
2. Pool circulation

Specification


Model No.	Output		Inlet		Outlet		Max Flow (LPM)	LPM Flow @ Head					Max Head (M)	Weight Kg
	HP	KW	mm	inch	mm	inch		6M	7M	8M	9M	10M		
CBP-330(T)	3	2.2	100	4"	100	4"	1200	1080	1000	890	750	580	11.5	24

Dimension

Model	A	B	D1	D2	L	L1	L2	W	W1	H	H1	H2
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm
CBP-330	95	77	110	110	412	245	215	281	180	301	323	167
CBP-330T	95	77	110	110	412	245	215	281	180	274	323	167

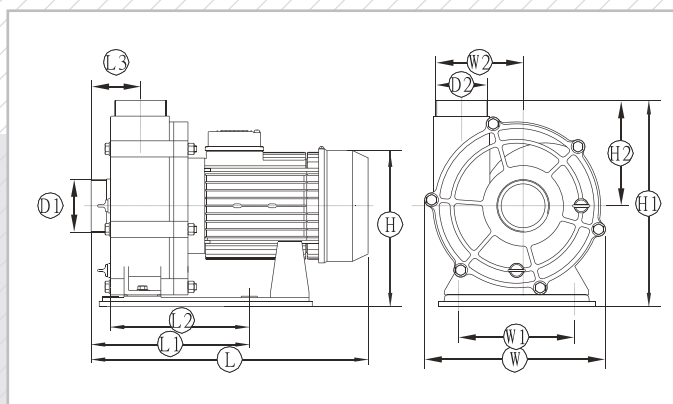

Curve

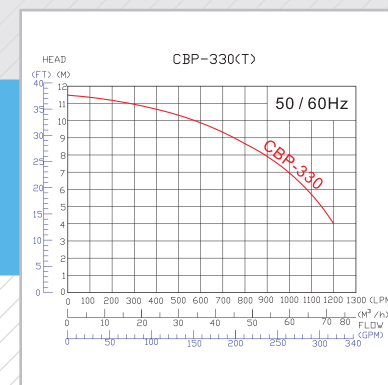

Standard Accessories

Model	Accessories
CBP-330(T)	Hose connection , nut

