

Continued from previous page

■ Probe (optional) for DHG-C420

Unit: mm


| | | |
|--|--|---|
| <p>SØ2mm carbide ball probe, code DHG-C-C2A</p> | <p>SØ4mm carbide ball probe, code DHG-C-C4A</p> | <p>Ø1.5mm pin probe, code DHG-C-P1</p> |
| <p>SØ10mm ruby ball probe, code DHG-C-R10</p> | <p>SØ4mm ruby ball probe, code DHG-C-R4</p> | <p>SØ5mm ruby ball probe, code DHG-C-R5B</p> |

4

DIGITAL HEIGHT GAGES WITH DRIVING WHEEL


DATA
OUTPUT

INSPECTION
CERTIFICATE
TRACEABLE TO DKD

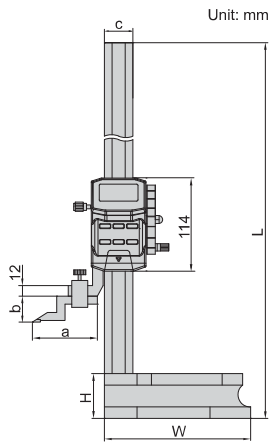

Unit: mm

scraper (included)



Unit: mm


- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch, preset +, preset -, ABS/INC
- Automatic power off, move the digital unit to turn on power
- Carbide tipped scriber
- Made of stainless steel
- Battery CR2032
- Data output
- Supplied with dust cover
- With dial test indicator holder
- Optional accessory: data output cable (code 7315-22, 7302-22), clamp for protractors (code 2372-CLAMP)



1156-300


1156-1000

dial test indicator holder (included)

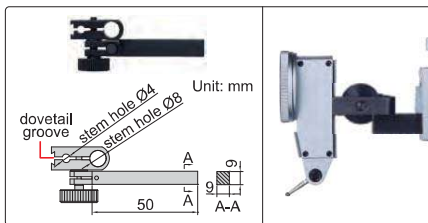

Unit: mm

clamp for protractors (optional)

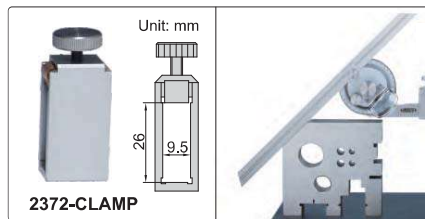

2372-CLAMP

| Code | Range | Accuracy | L | W | H | a | b | c | h |
|------------|----------------|----------|--------|-------|------|------|------|------|------|
| 1156-300* | 0-300mm/0-12" | ±0.03mm | 515mm | 180mm | 55mm | 80mm | 30mm | 35mm | 9mm |
| 1156-600* | 0-600mm/0-24" | ±0.05mm | 815mm | 180mm | 55mm | 80mm | 30mm | 35mm | 9mm |
| 1156-1000* | 0-1000mm/0-40" | ±0.07mm | 1220mm | 265mm | 70mm | 92mm | 48mm | 40mm | 12mm |

*Supplied with manufacturer inspection certificate traceable to DKD Germany